

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/12/15'		LJC 03/12/15'
B	DRAWING UPDATE	JLZ 11/15/16'		

NOTES:

1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min

2.PRODUCT NUMBER CODE:



DS1110 - X X X X

CONTACT PLATING
6: TIN


COLOR OF HOUSING:
W: WHITE
B: BLACK

CONNECTOR TYPE
F: FEMALE


No. OF CONTACTS
2 3 4 5 6 7 8 9

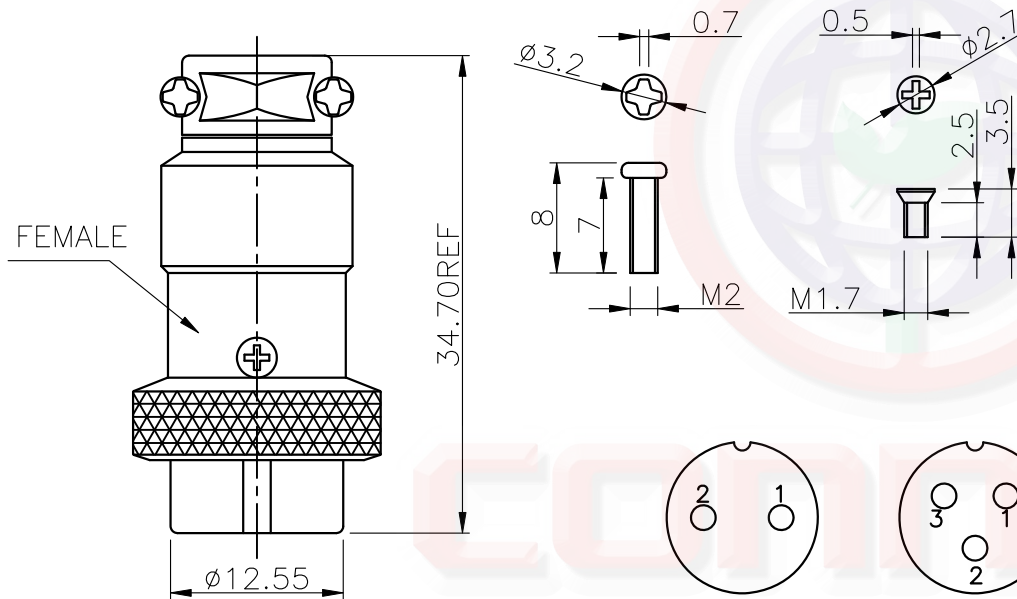


2 PIN




3 PIN




4 PIN




5 PIN




6 PIN




7 PIN



8 PIN



9 PIN

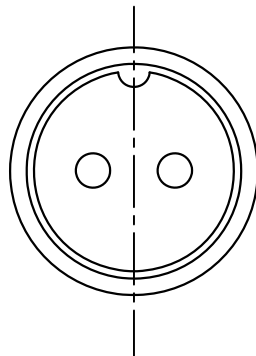

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		
X.	±0.60	X.	±5°	UNITS	mm	MICRO JACK CONNECTOR		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1110 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET					2 OF 3
DRAWING NO.		C-DS1110-XXXX-B						



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/12/15'		LJC 03/12/15'
B	DRAWING UPDATE	JLZ 11/15/16'		

NOTES:

1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min

2.PRODUCT NUMBER CODE:




DS1110 - X X X X

CONTACT PLATING
6: TIN


COLOR OF HOUSING:
W: WHITE
B: BLACK

CONNECTOR TYPE
M: MALE


No. OF CONTACTS
2 3 4 5 6 7 8 9

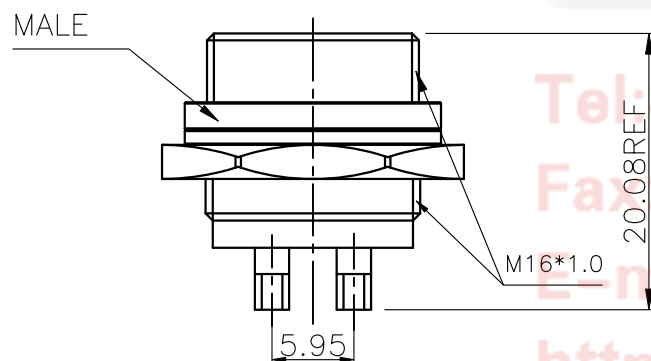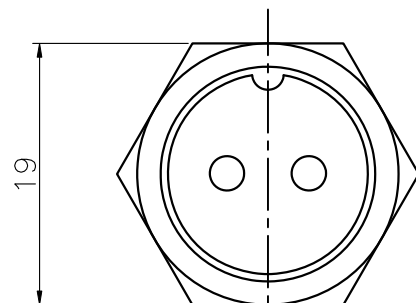


2 PIN




3 PIN




4 PIN




5 PIN




6 PIN



7 PIN



8 PIN



9 PIN

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MICRO JACK CONNECTOR	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1110 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	3 OF 3				
DRAWING NO.	C-DS1110-XXXX-B						