

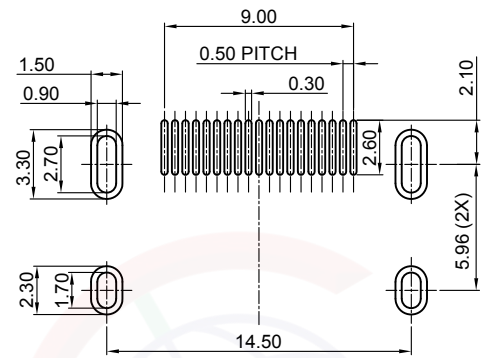

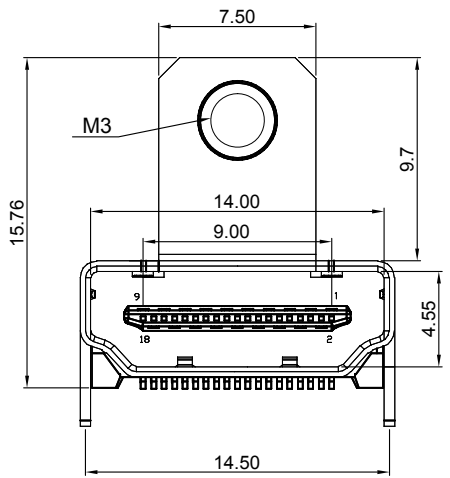


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any form or manner, including but not limited to, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

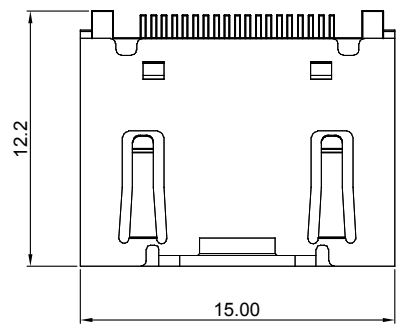

RECOMMEND P.C.B LAYORT
(Tolerance±0.05)

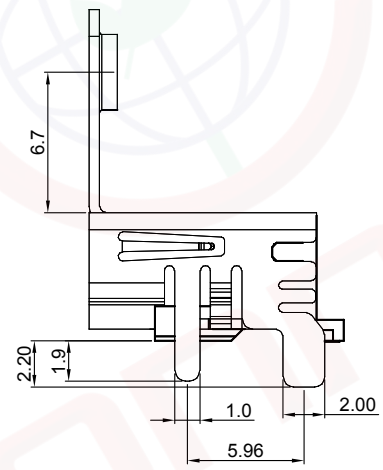

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1115-XXX-C		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 18/07/05		LJC 18/07/05
B	DRAWING UPDATE	JLZ 12/13/18'		
C	DRAWING UPDATE	JLZ 05/06/22'		

NOTES:

1. Materials

- . Insulator: thermoplastic,UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy

2. Specification

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -20°C to +85°C.

3. Product number code:

DS1115 - X X X

- Contact plating
0: selective gold flash
C: selective 3u" gold
1: selective 10u" gold
- Shell plating
6: Tin
N: Nickel
- Color of housing
B: Black

PROJECTION		TITLE	
UNITS	mm	HDMI Female 19PIN SMT WITH FLANGE	
SHEET SIZE	A4	SERIES	DS1115 SERIES
 晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO., LTD			