

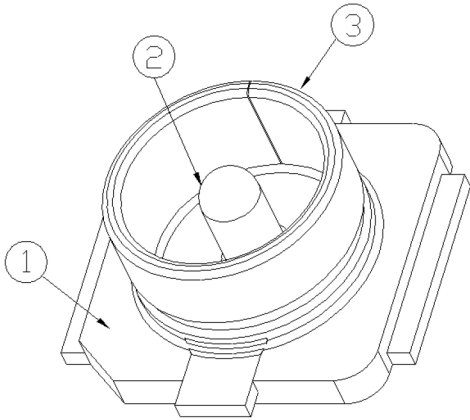
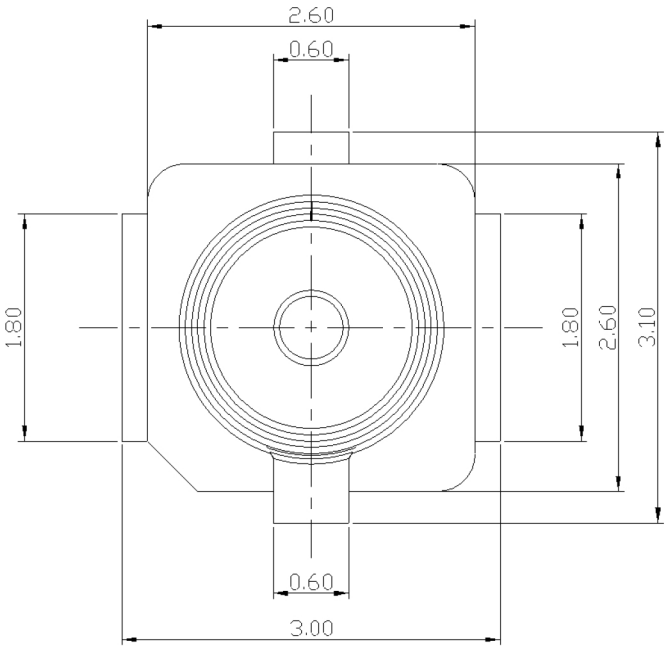


REV.	ECN NO.	DESIGN	DATE
X1			

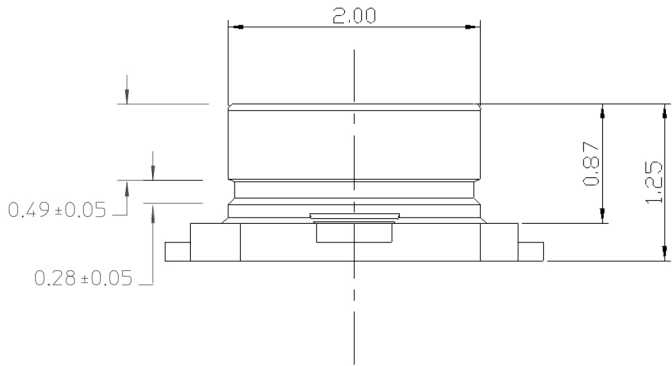

NOTE:
1. ELECTRICAL CHARACTERISTICS:
1.1 CURRENT RATING: 0.5A MAX.
1.2 IMPEDANCE:50OHM NOMINAL.
2. MECHANICAL CHARACTERISTICS:
2.1 OPERATING TEMP. -40°~90°
2.2 VSWR UP TO 3GHz:1.3MAX.
3GHz TO 6GHz:1.4MAX.
2.3 DURABILITY:30CYCLES

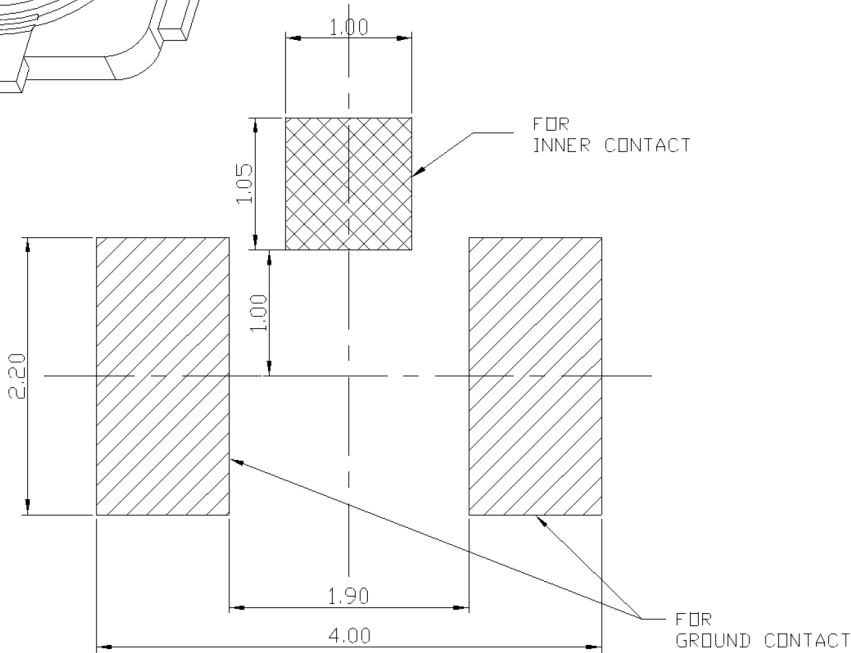

3	GROUND CONTACT	1	COPPER ALLOY	Au PLATING OVER NI OVER ALL	
2	INNER CONTACT	1	COPPER ALLOY	Au PLATING OVER NI OVER ALL	
1	HOUSING	1	LCP UL94V-0		
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK

KLS electronic NINGBO KLS ELECTRONIC CO.,LTD.			TITLE: RF BOARD AND CONNECTOR, FIRST GENERATION				
			DWG NO.:				
.X± 0.25	.X± 5°	APPD: Max 9/2'11	CUSTOMER DRAWING	PART NO. (料号): L-KLS1-IPEX-20279-001E-01			
.XX± 0.25	.XX± 3°	CHKD: Max 9/2'11		UNITS	SCALE	SHEET	REV.
.XXX±	.XXX± 1°	DR: Andy 9/2'11		mm	1:1	1/1	X1