



PIN Header Series

KLS1-207D PIN HEADER 1.27x2.54mm Straight Pin Type

Electrical Characteristics:





Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass
 Plating: Gold plated: 0.8u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel

Features:

- * Dual insulators offer high versatility.
- * Side-to-side and end-to-end stackable.
- * Custom design provides excellent products flexibility.

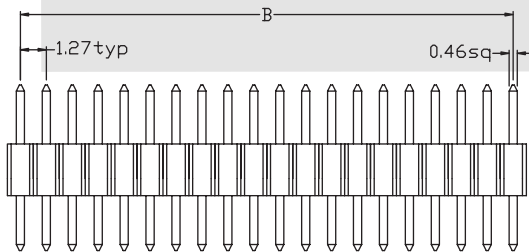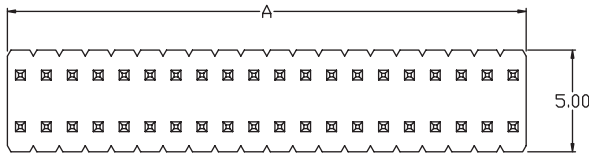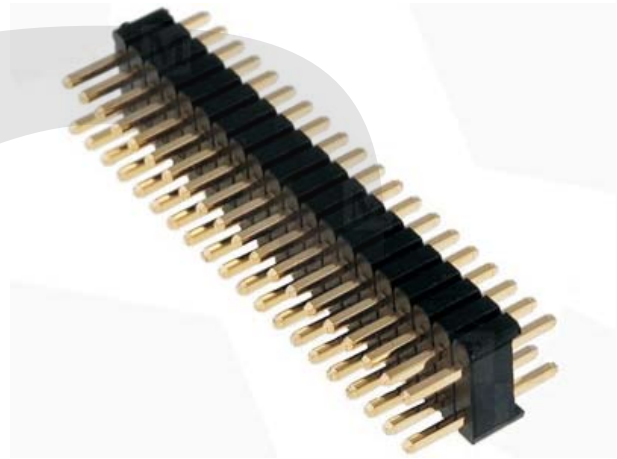

Position	2 Thru 80
Dimension	
A±0.20	1.27 X No.of Positions
B±0.15	1.27 X No.of Positions -1.27



P.C.B Layout

ORDER INFORMATION

Product No.: KLS1-207D - XX-S

Pos. No. _____ Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
 1.27x2.54mm Pin Header Series _____ Total pin number: XX= 2-80pin



PIN Header Series

KLS1-207D PIN HEADER 1.27x2.54mm Right Pin Type

Electrical Characteristics:




Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass
 Plating: Gold plated: 0.8u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel

Features:

- * Dual insulators offer high versatility.
- * Side-to-side and end-to-end stackable.
- * Custom design provides excellent products flexibility.

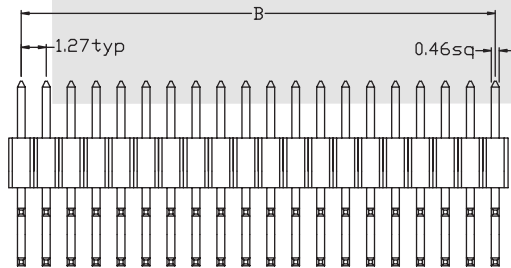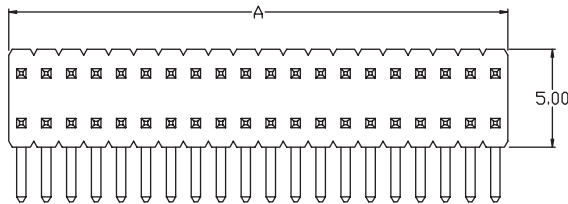

Position	2 Thru 80
Dimension	
A±0.20	1.27 X No.of Positions
B±0.15	1.27 X No.of Positions -1.27



P.C.B Layout

ORDER INFORMATION

Product No.: KLS1-207D - XX-R

Pos. No. _____
 1.27x2.54mm Pin Header Series

Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
 Total pin number: XX= 2~80pin



PIN Header Series

KLS1-207D PIN HEADER 1.27x2.54mm SMT Type

Electrical Characteristics:





Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass
 Plating: Gold plated: 0.8u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel

Features:

- * Dual insulators offer high versatility.
- * Side-to-side and end-to-end stackable.
- * Custom design provides excellent products flexibility.

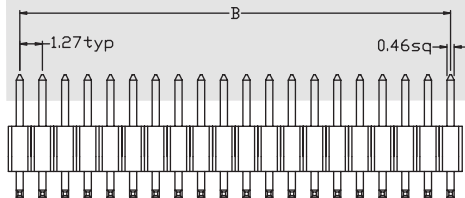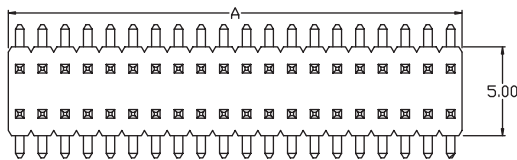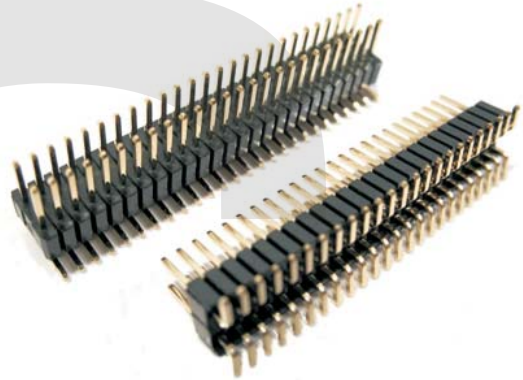

Position	2 Thru 80
Dimension	2 Thru 80
A±0.20	1.27 X No.of Positions
B±0.15	1.27 X No.of Positions -1.27

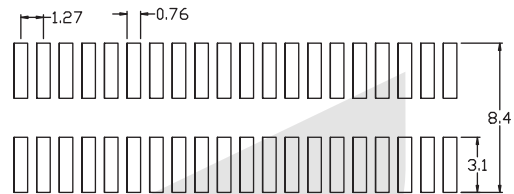

P.C.B Layout

ORDER INFORMATION

Product No.: KLS1-207D - XX-T

Pos. No. _____ Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
 1.27x2.54mm Pin Header Series _____ Total pin number: XX= 2-80pin