



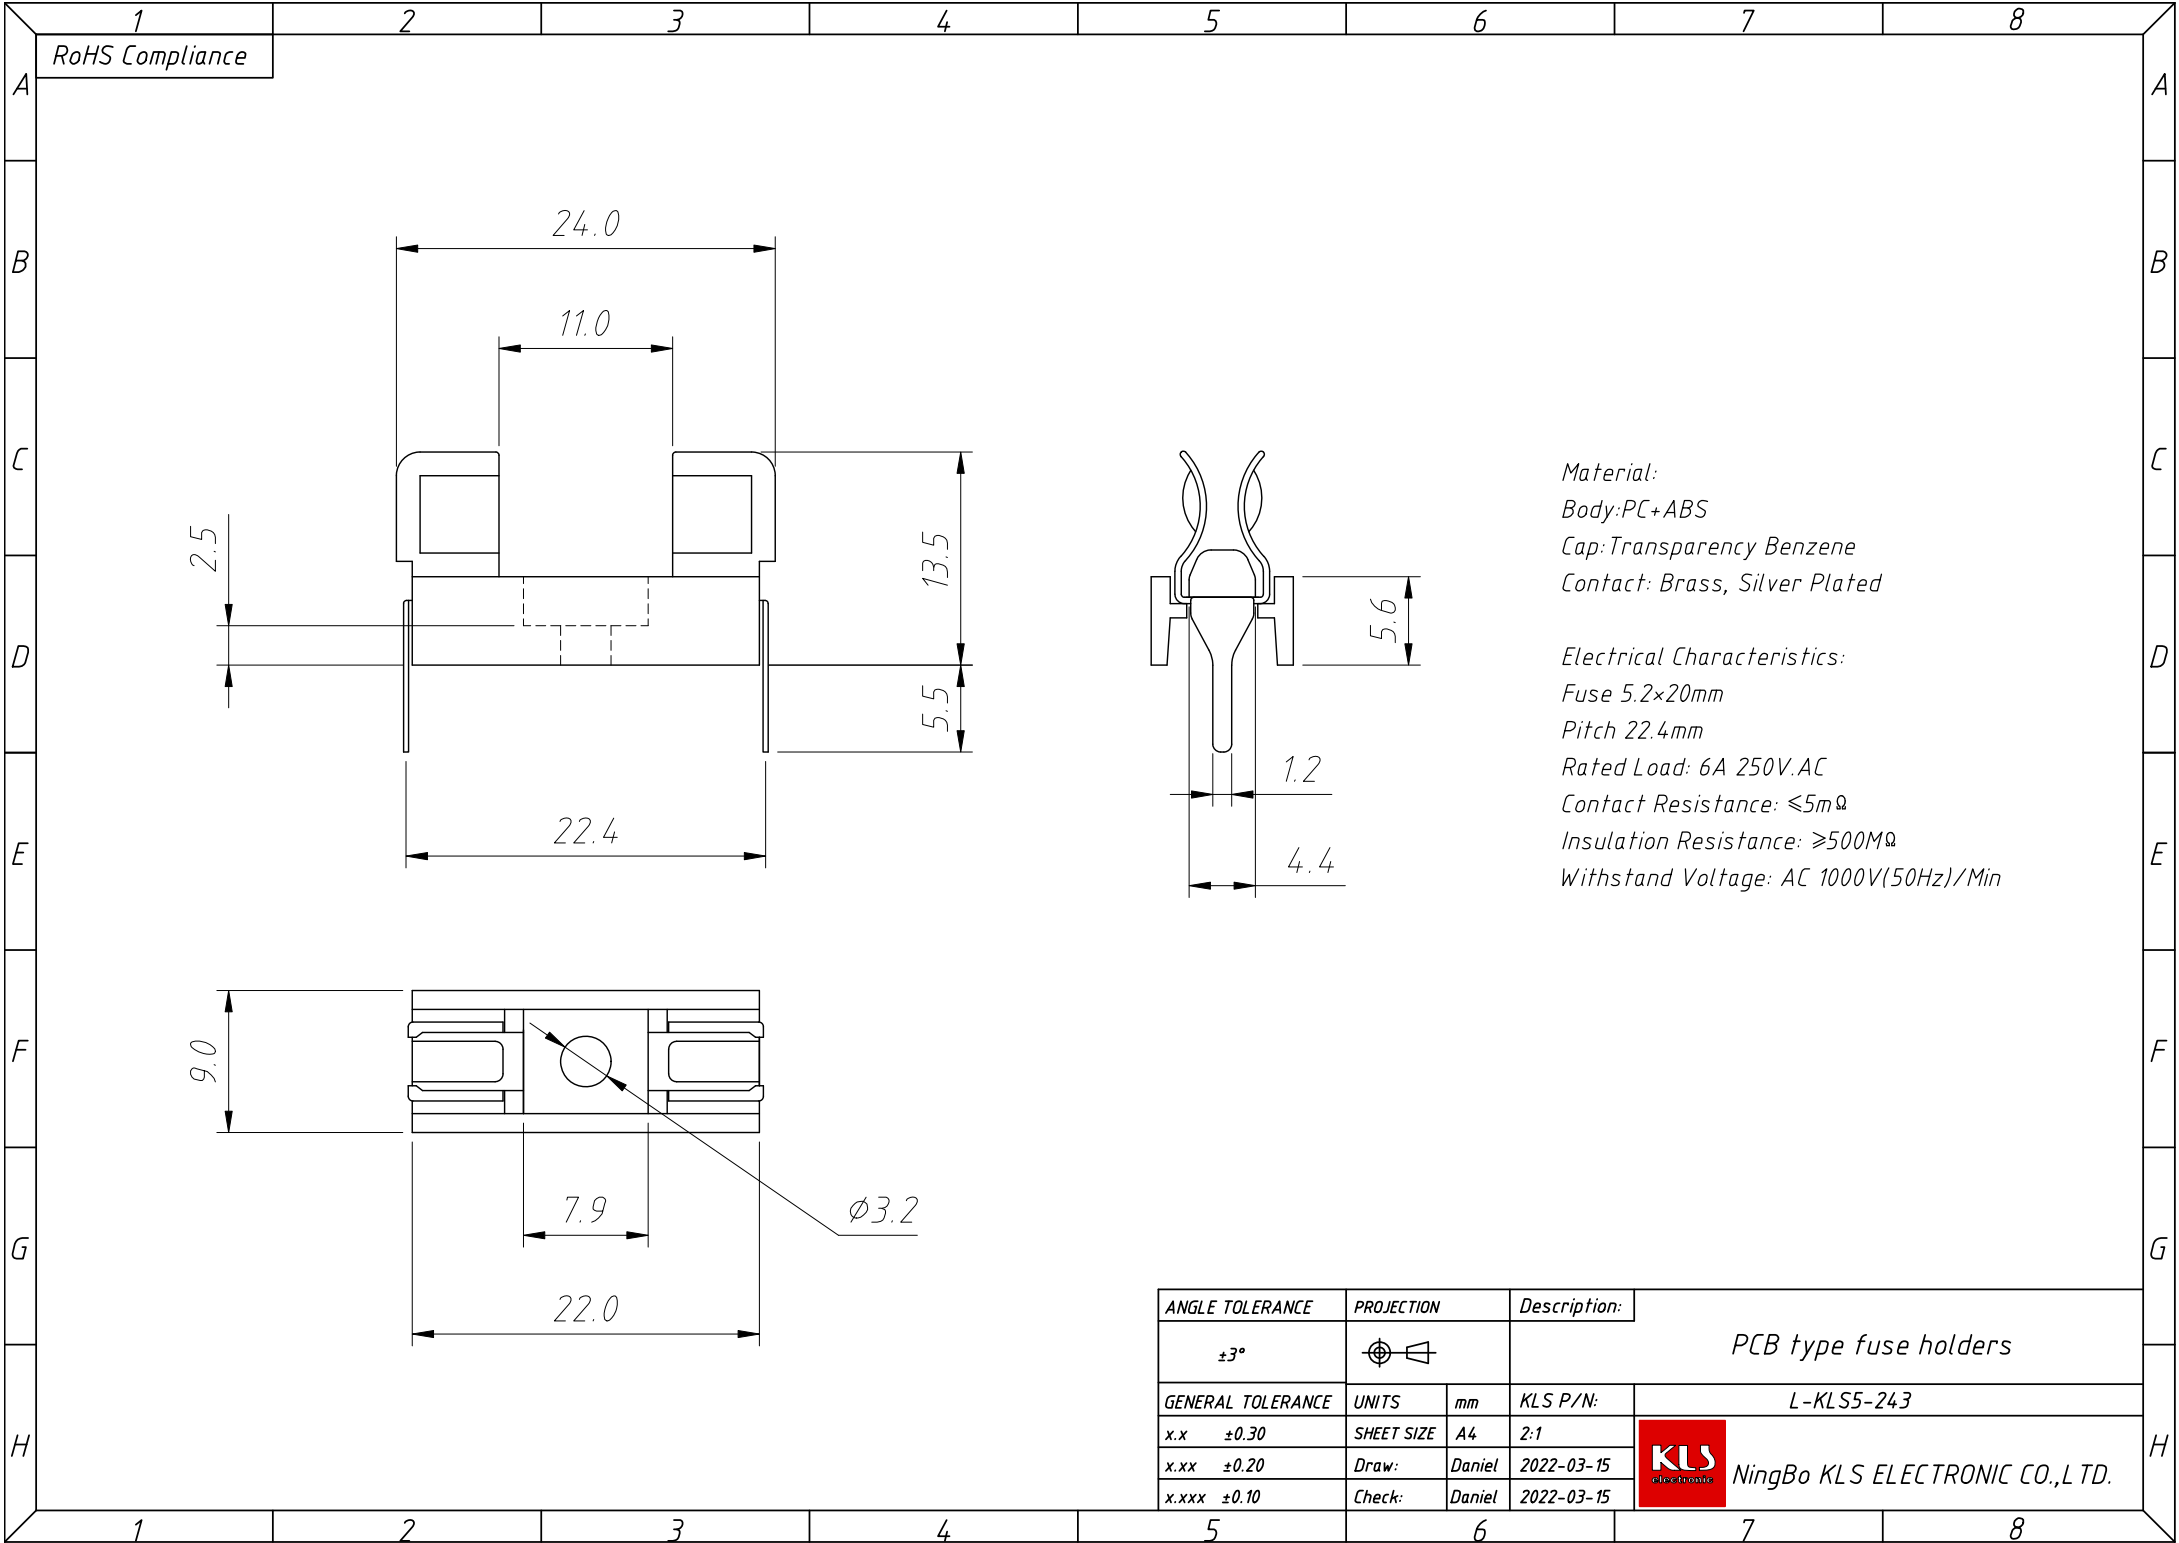

Material:
Body:PC+ABS
Cap:Transparency Benzene
Contact: Brass, Silver Plated

Electrical Characteristics:
Fuse 5.2×20mm
Pitch 22.4mm
Rated Load: 6A 250V.AC
Contact Resistance: $\leq 5m\Omega$
Insulation Resistance: $\geq 500M\Omega$
Withstand Voltage: AC 1000V(50Hz)/Min

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				PCB type fuse holders	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	± 0.30	SHEET SIZE	A4	2:1	L-KLS5-243
x.xx	± 0.20	Draw:	Daniel	2022-03-15	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	± 0.10	Check:	Daniel	2022-03-15	

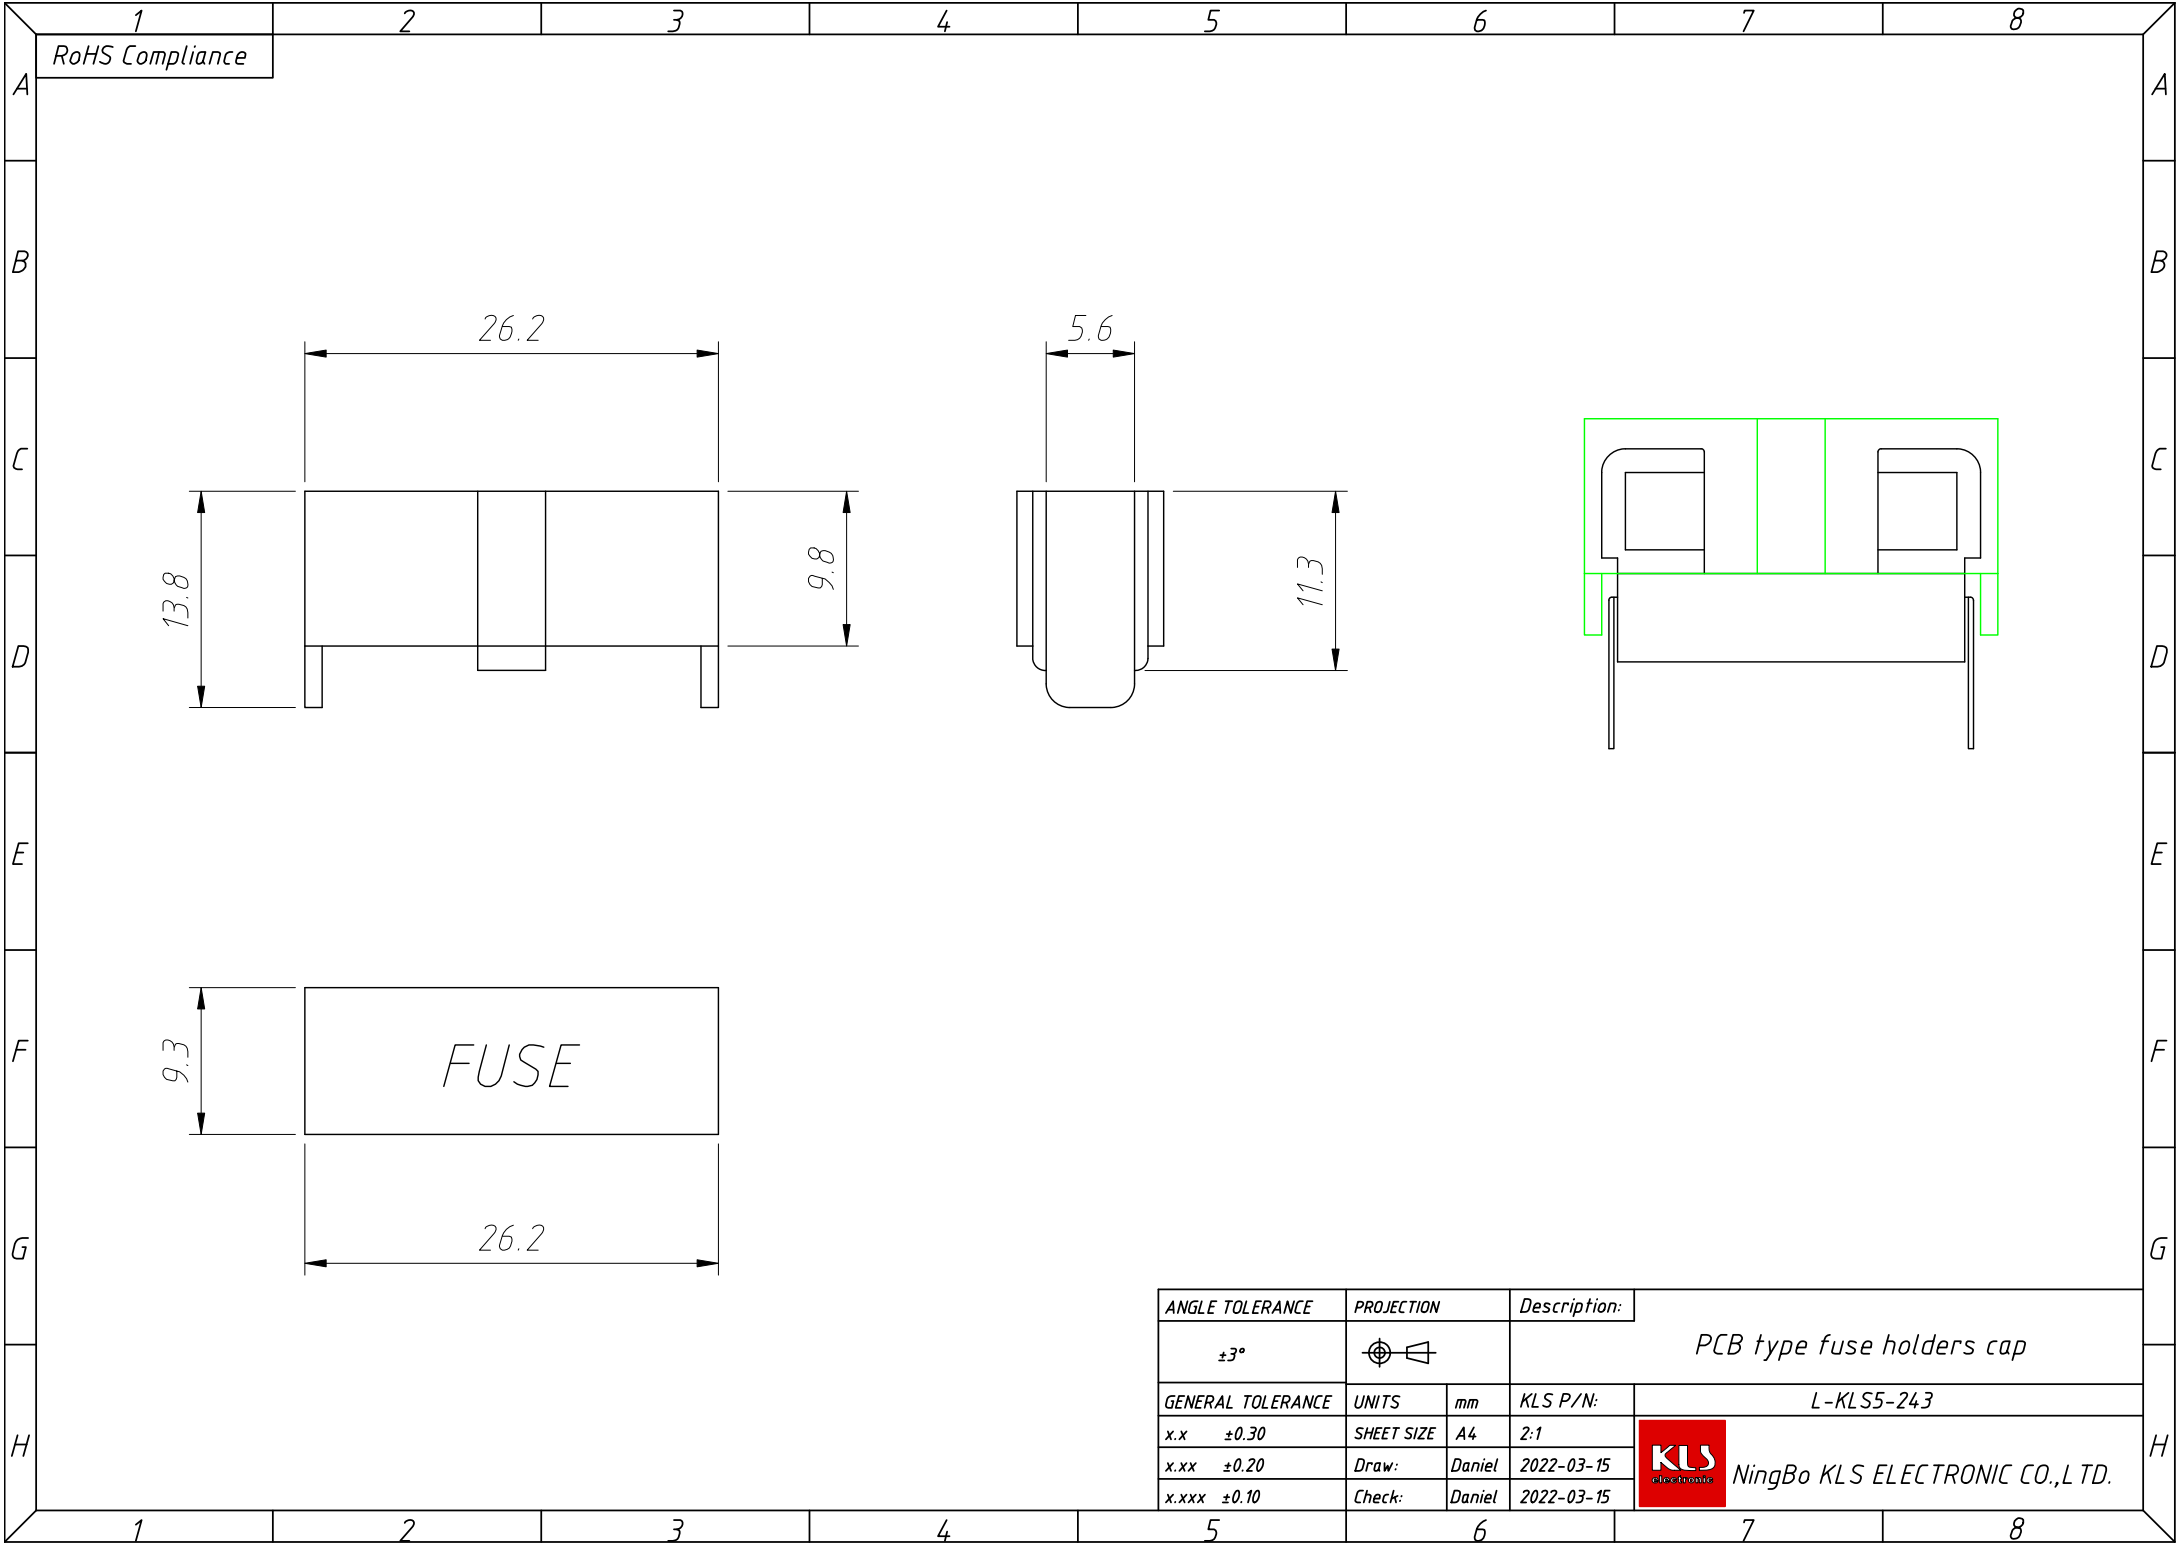

RoHS Compliance

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCB type fuse holders cap	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS5-243
x.x	±0.30	SHEET SIZE	A4	2:1	NingBo KLS ELECTRONIC CO.,LTD.
x.xx	±0.20	Draw:	Daniel	2022-03-15	
x.xxx	±0.10	Check:	Daniel	2022-03-15	