


E-With ears N-Without ears

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm Pitch IDC Box Header Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-201Z-XX-G-E
x.x ±0.30	SHEET SIZE	A4			NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Daniel	2018-07-10		
x.xxx ±0.10	Check:	Daniel	2018-07-10		

1
RoHS Compliance

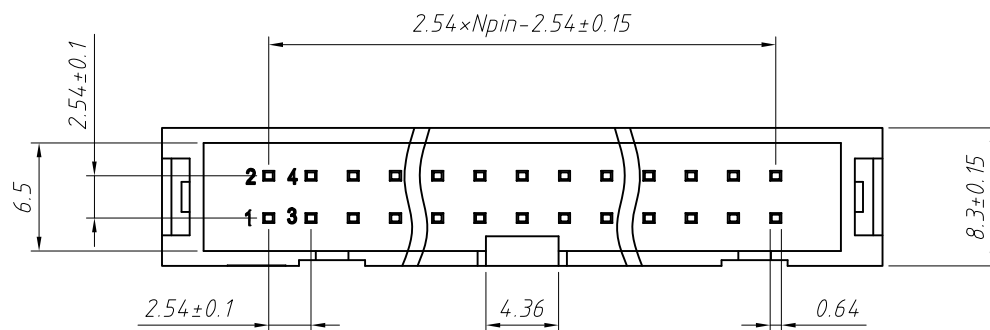

Material:

Housing: PBT, UL 94V-0

Contacts: Brass

Plating: Au or Sn Over Ni

Cable: 1.27mm (0.050") pitch flat cable

Electrical Characteristics:

Current Rating: 3.0 AMP

Withstand Voltage: 1000V AC

Insulator Resistance: 1000M Ohm min

Contact Resistance: 20m Ohm max.

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Order Information:

L-KLS1-201Z-XX-G-N

L: RoHS

IDC connectors


2.54mm Pitch

XX-No. of 06~64pin

Color: B-Black G-Gray

Type:

E-With ears N-Without ears

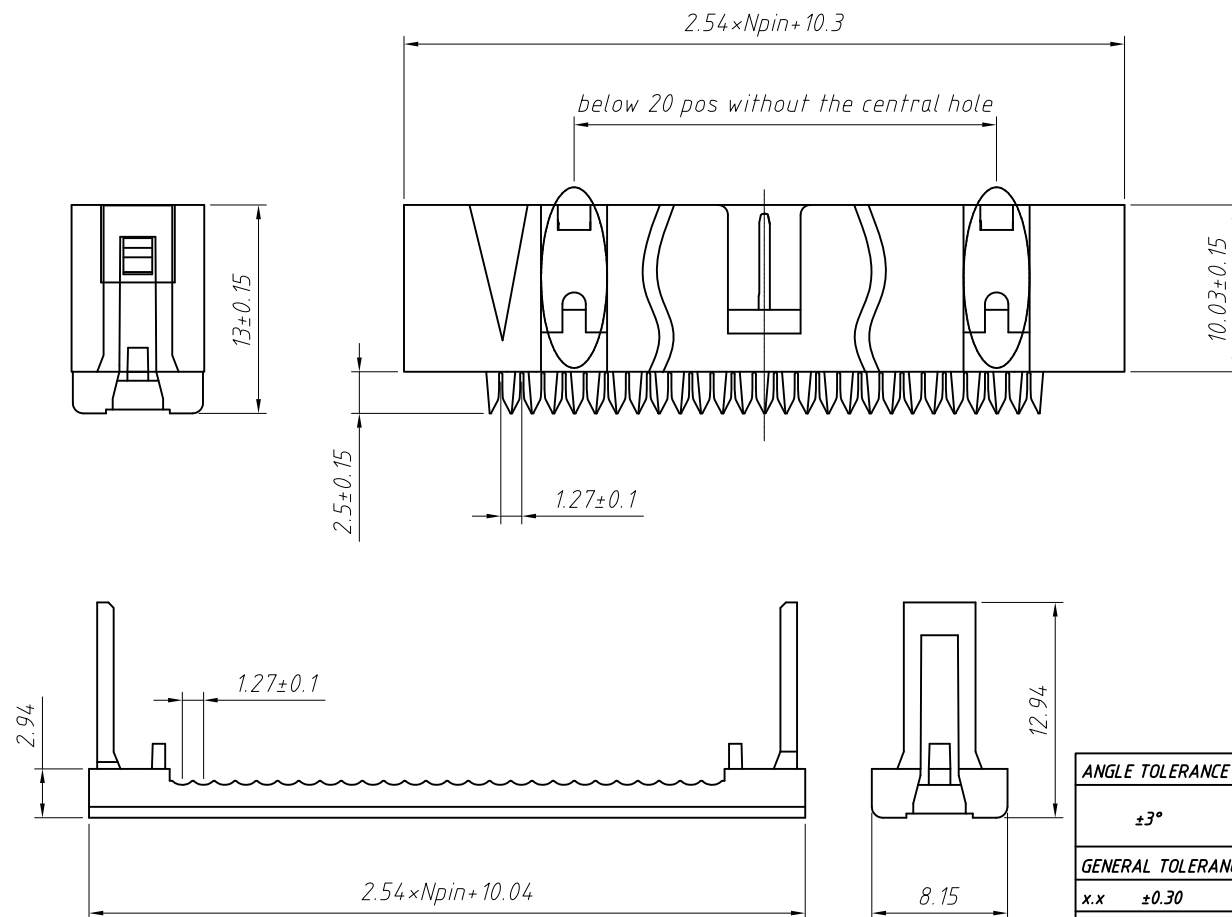

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				2.54mm Pitch IDC Box Header Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x		± 0.30		L-KLS1-201Z-XX-G-N	
x.xx		± 0.20			
x.xxx		± 0.10			
		SHEET SIZE	A4		
		Draw:	Daniel		
		Check:	Daniel		



NingBo KLS ELECTRONIC CO.,LTD.