

2.0mm (0.079") Femal Header, Dual Row, Straight






Insulator Material	
PBT	
PA6T	✓
LCP	

SPECIFICATONS

Insulator :PA6T+30%GlassFiber,
 UL94V-0
 Contact :Phosphor Bronze
 Contact Plating :Gold/Tin over Nickel
 Current Rating :1.5A
 Operation Temperature :-40°C to +105°C
 Insulation Resistance :1000MΩ Min at DC 500V
 contact resistance :30mΩ Max at DC 1.5A
 Processing Temperature:260°C for 10 seconds

$$a = 2.0 \times (\text{No. of pins per row} - 1)$$

$$b = 2.0 \times (\text{No. of pins per row}) + 0.4$$

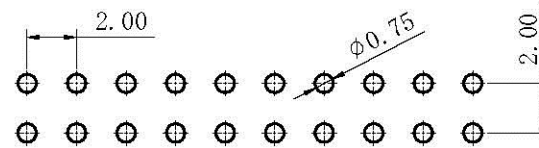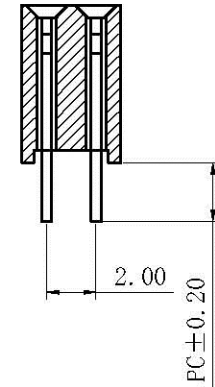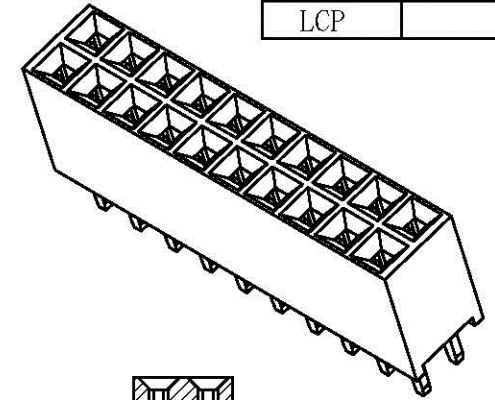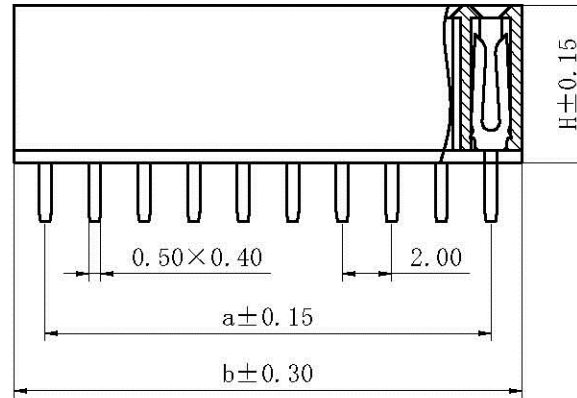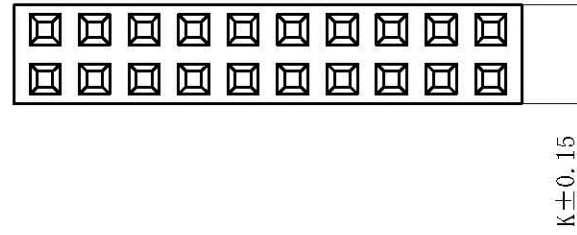

PCB. LAYOUT

3.0	
2.8	✓
2.4	

PC长度选择

KLS ELECTRONIC CO., LTD.				TOLERANCE UNLESS OTHERWISE SPECIFIED	DWG NO.:	SCALE:	FIT
				.XXX ±0.10 .XX ±0.20 .X ±0.30 .X° ±0.3°	UNIT: mm	SHEET: 1/1	
PRODUCT NAME:	Female Header	VER: 03	CHECKED BY:	DATE: 2015.6.7	DRAWN BY: Burning		
SPECIFICATION:	L-KLS1-202H-XX-S-B-D			ECN:			

	L-KLS1-202H-XX-S-B-D	6.35	4.0
客户料号	规格型号	H	K