

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C



D

E

F

G



H

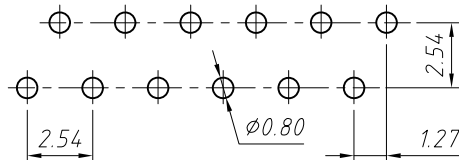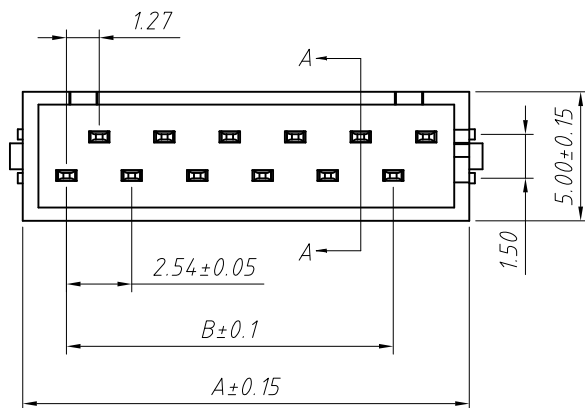

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Material:
Housing:PBT / PA46, UL94 V-0
Contacts:Brass
Plating: Au over Ni

Electrical Characteristics:
Current Rating: 1.0 AMP
Contact Resistance: 20m Ohm max.
Insulator Resistance: 1000M Ohm min.
Withstand voltage:500V AC
Operating Temperature: -40°C~+105°C

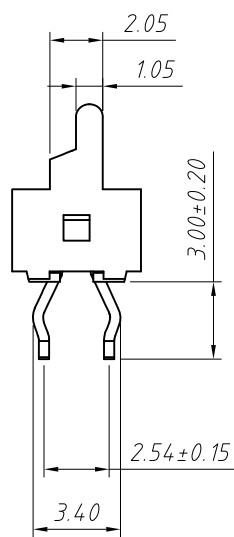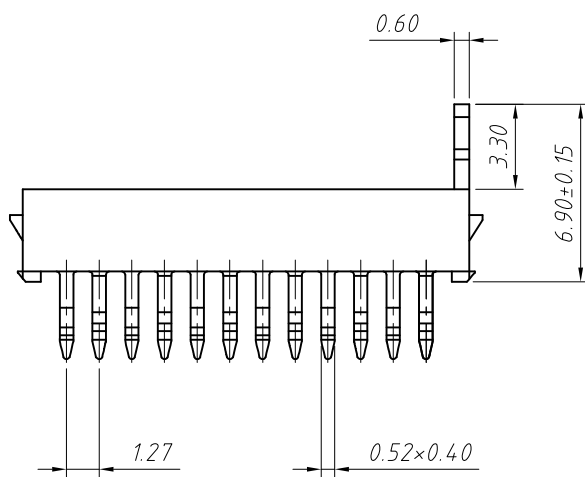

Order Information:
L-KLS1-204MA-XX-R-□-□

L: RoHS
Pitch:2.54mm
XX-No. of 04~26pin
Color:R-Red B-Black
Material:
A=PBT D=PA9T E=PA46
Packing:NONE=Tube R=Reel

Poles	DIM.A	DIM.B	Qty/Tube	Poles	DIM.A	DIM.B	Qty/Tube
04	7.20	2.54	68	16	22.44	17.78	24
06	9.74	5.08	52	18	24.98	20.32	22
08	12.28	7.62	42	20	27.52	22.86	20
10	14.82	10.16	36	22	30.06	25.40	18
12	17.36	12.70	31	24	32.60	27.94	17
14	19.90	15.24	27	26	35.14	30.48	16

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Micro Match Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-204MA-XX-R-□-□
x.x	±0.30	SHEET SIZE		A4	NingBo KLS ELECTRONIC CO.,LTD.
x.xx	±0.20	Draw:	Daniel	2018-07-10	
x.xxx	±0.10	Check:	Daniel	2018-07-10	

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H