

D-SUB Series


KLS1-213 D-SUB 2 ROW SOLDER TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

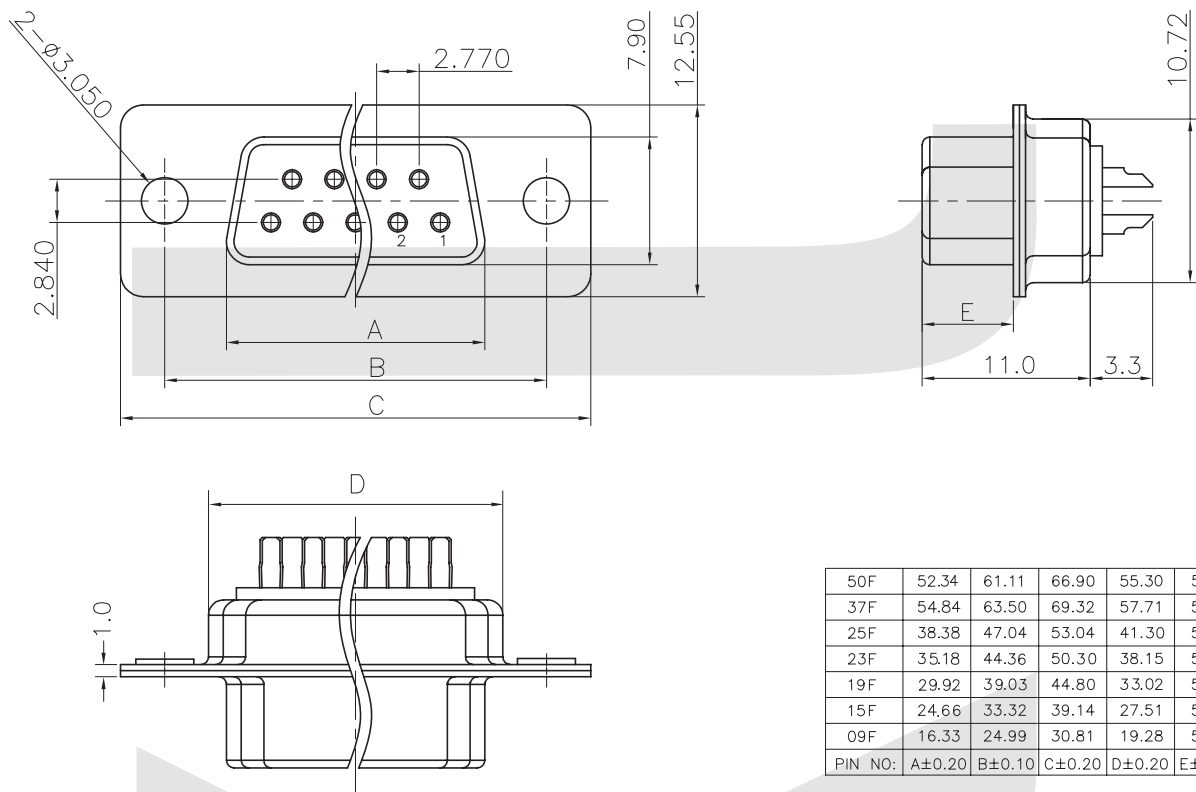

ORDER INFORMATION

Product NO.: KLS1-213-XX - F - L

Pos. NO.

001=001 pos.

Contact Number of Row
213=DB Series

Number of Contacts

L=Blue B=Black W=White

M=Male F=Female

Connector

D-SUB Series


KLS1-213 D-SUB 2 ROW SOLDER TYPE

Electrical Specification:

Current Rating: 2 AMP
Insulator Resistance: 5000M ohms min. at DC 500V
Contact Resistance: 20m ohms max. at DC 100mA
Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

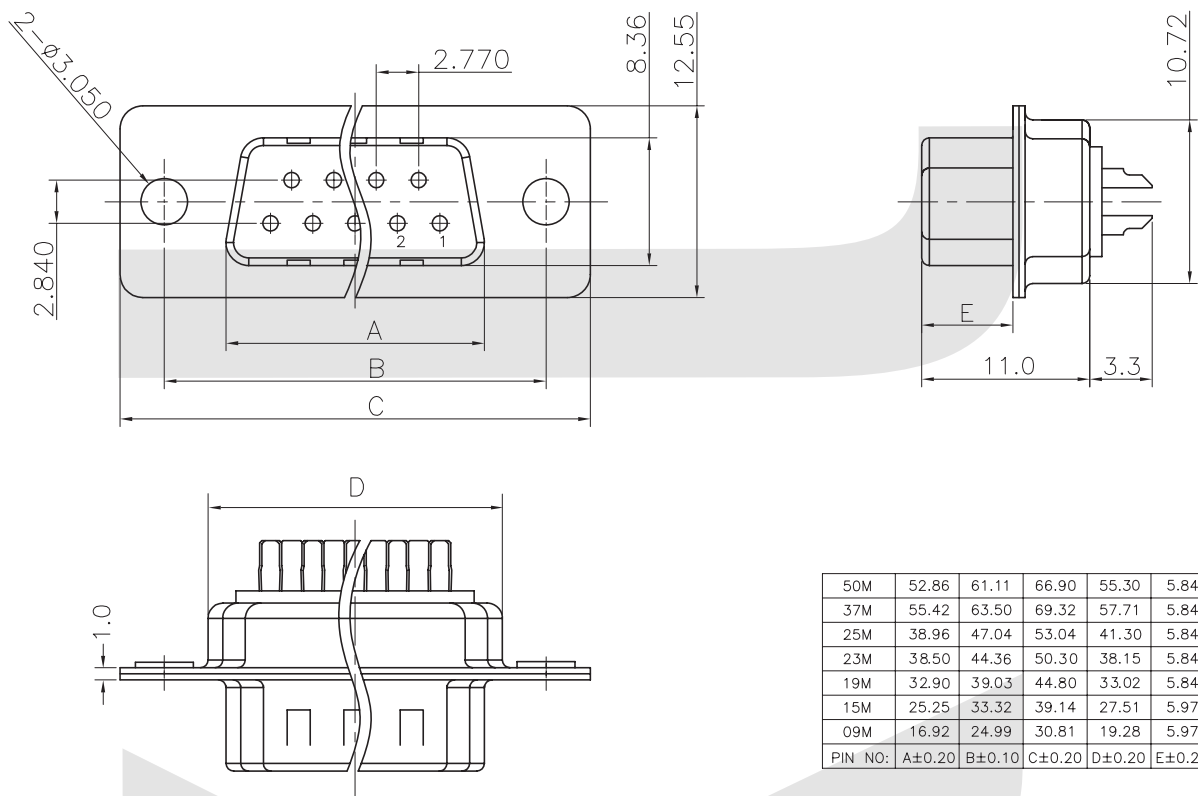

ORDER INFORMATION

Product NO.: KLS1-213-XX - M -L

Pos. NO.

001=001 pos.

Contact Number of Row
213=DB Series

Number of Contacts

L=Blue B=Black W=White

M=Male F=Female