



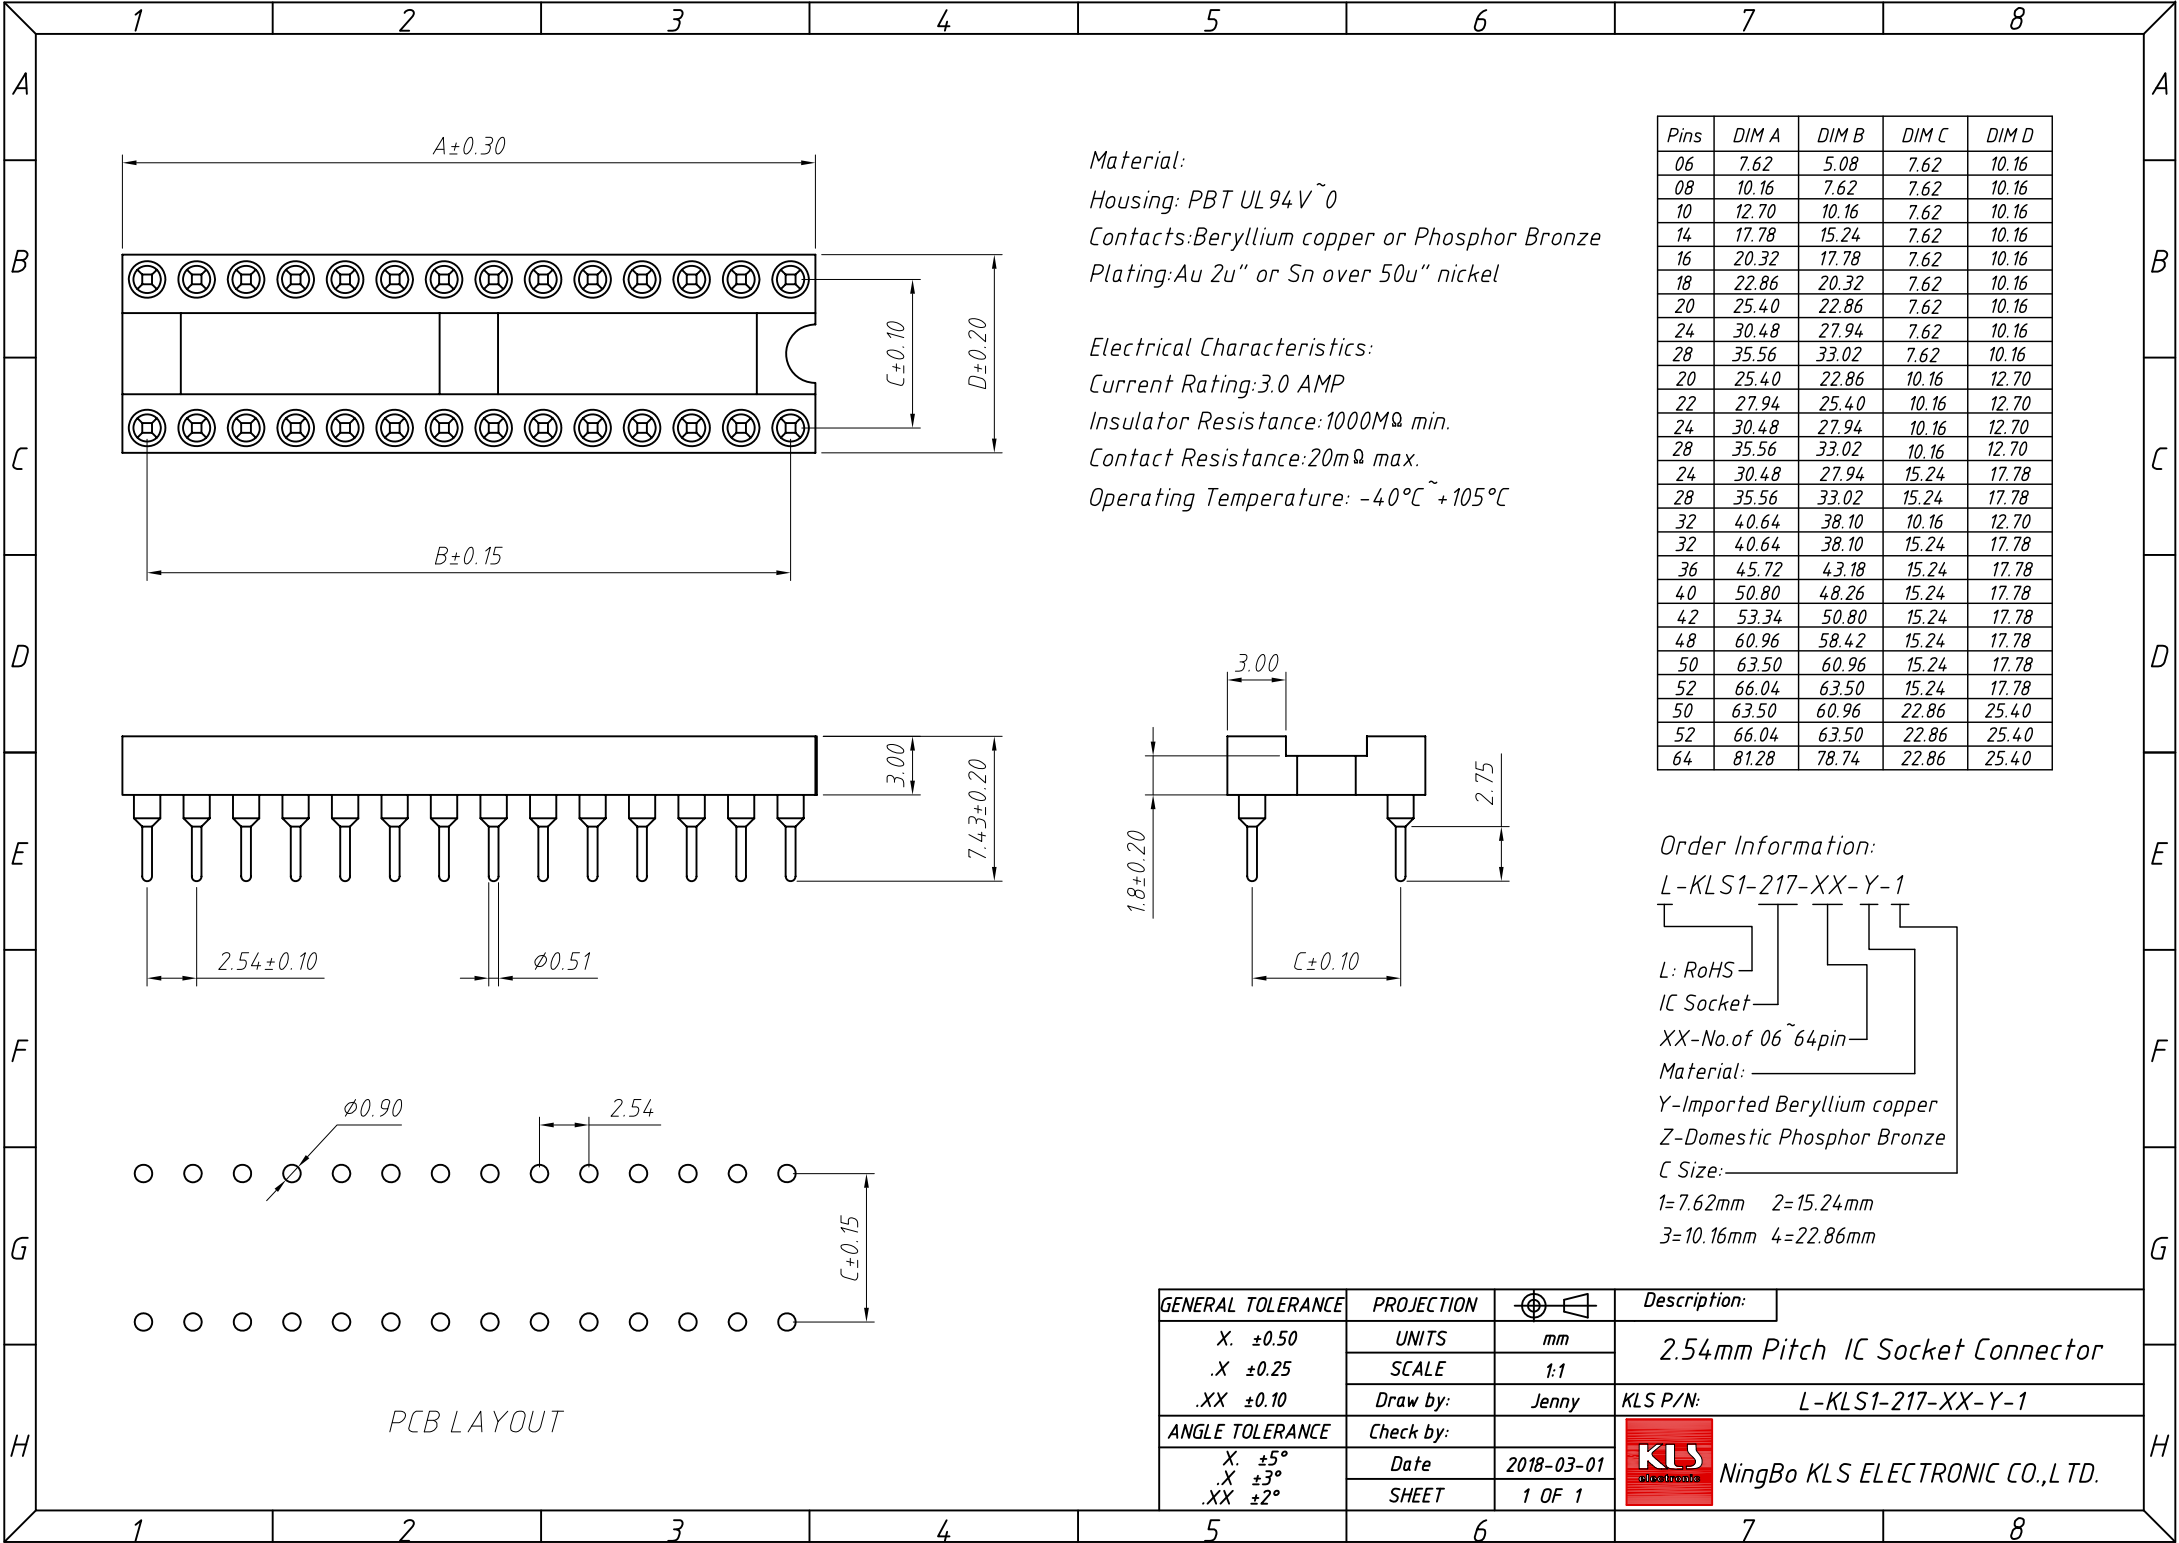

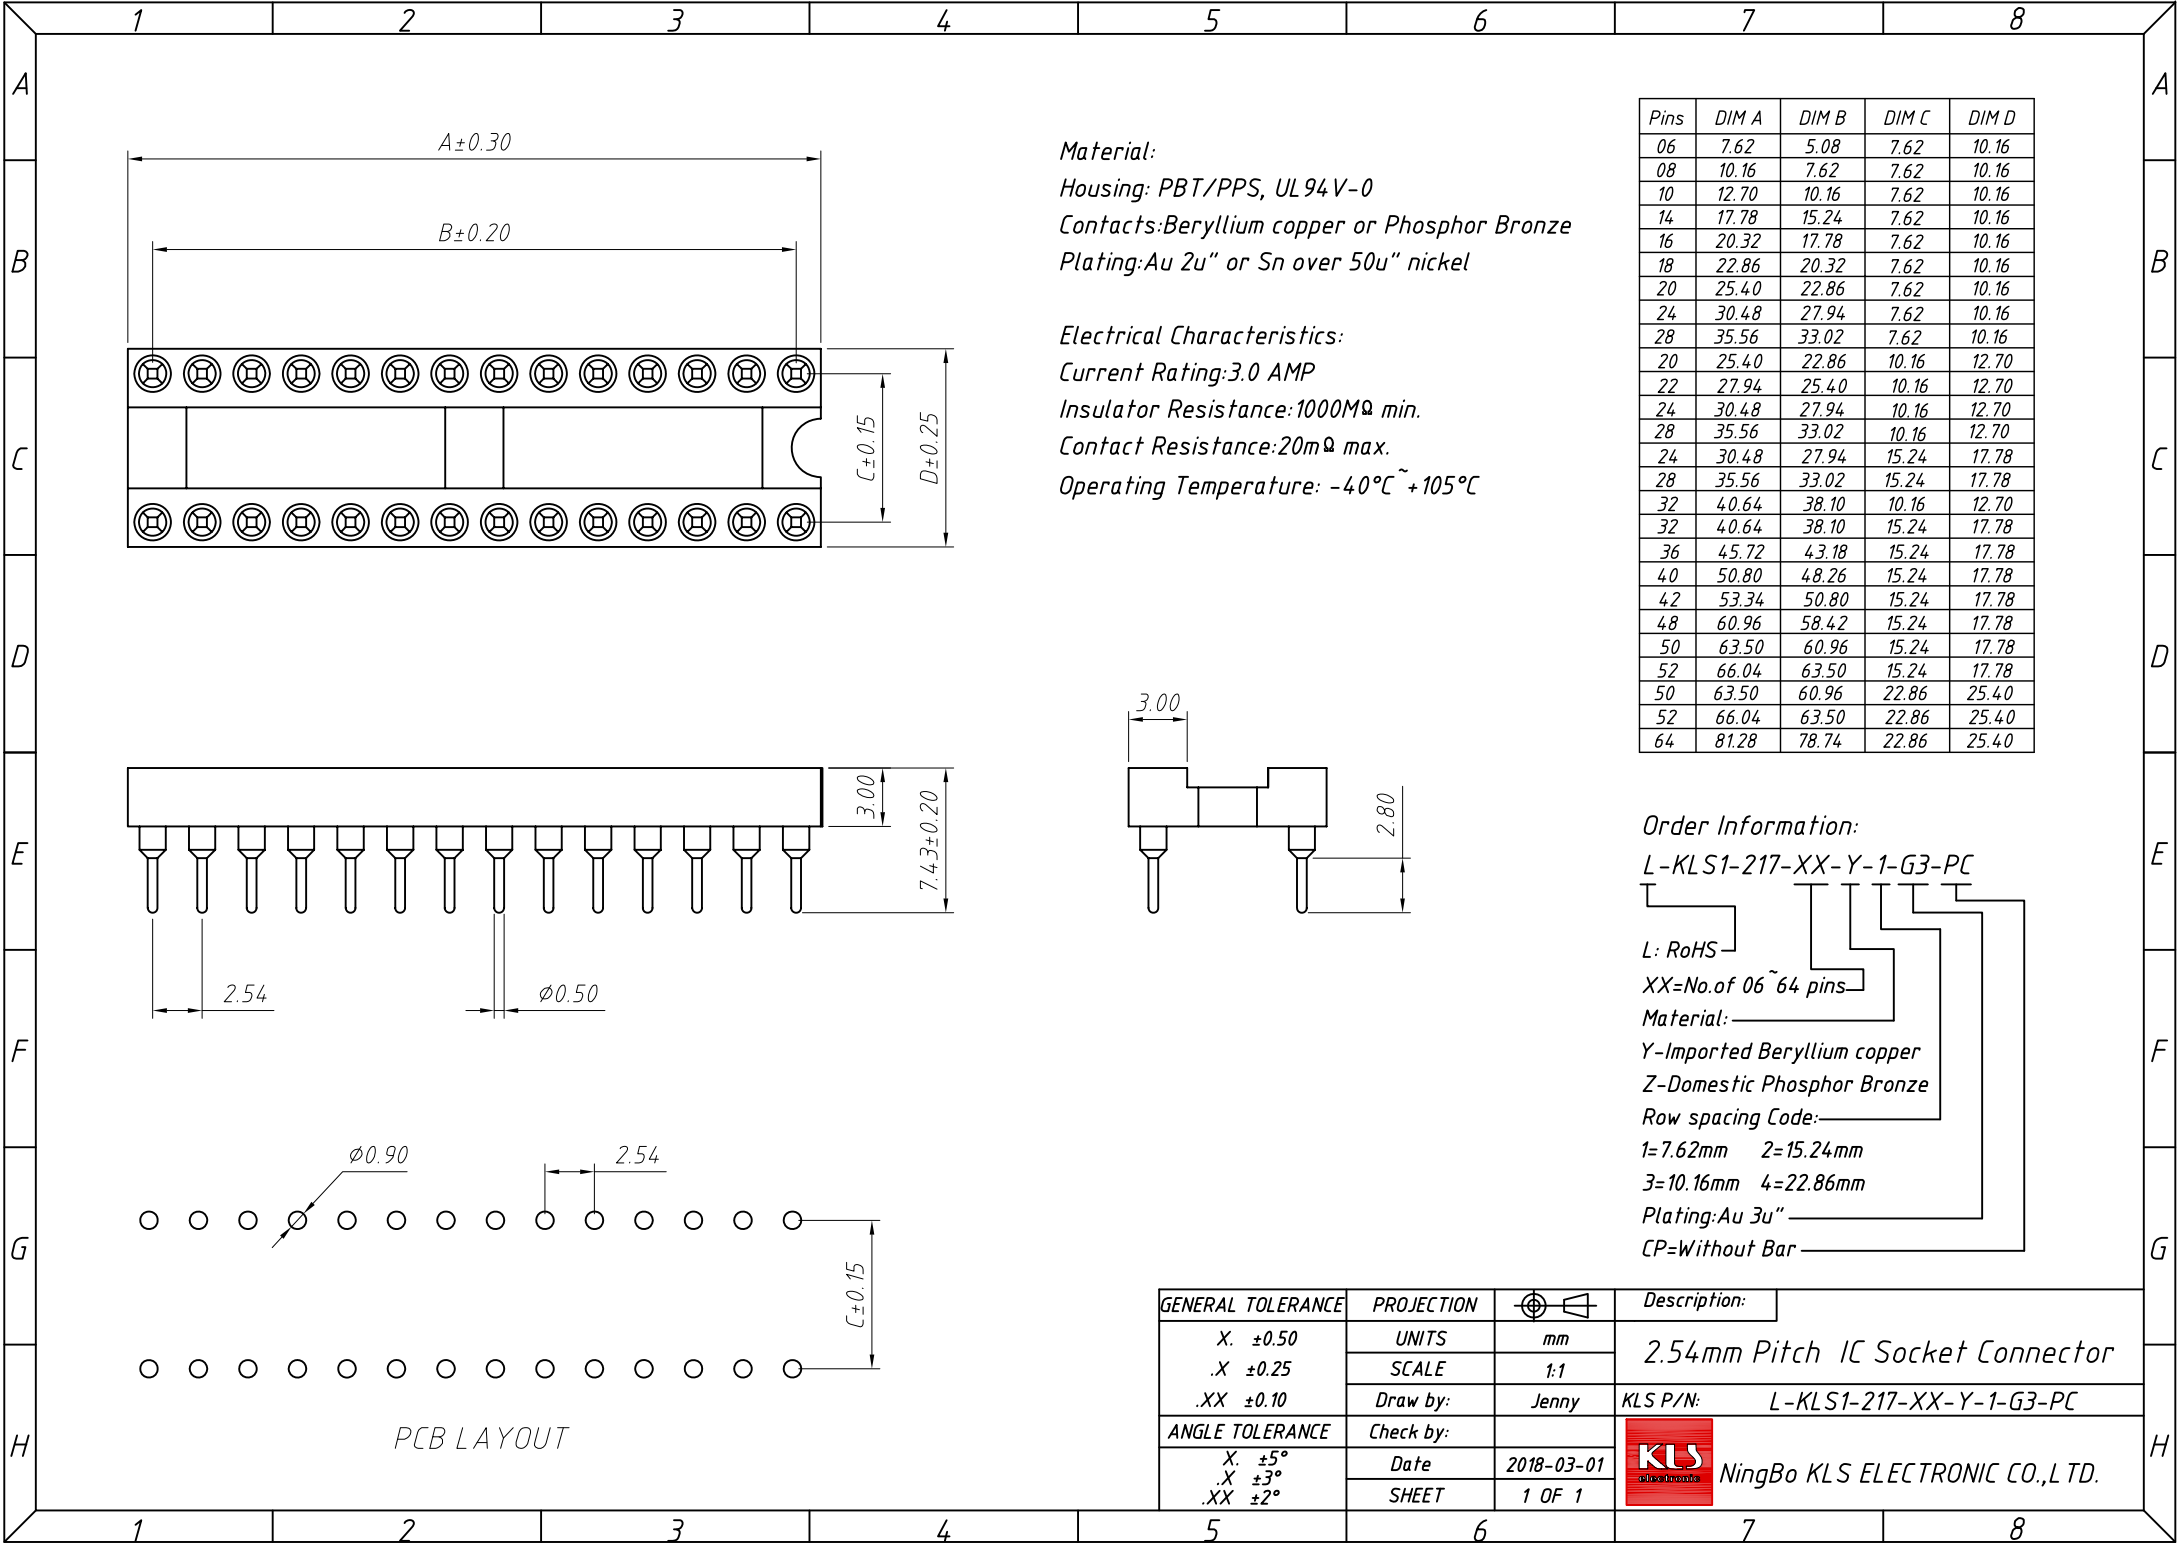

Material:
Housing: PBT/PPS, UL 94 V-0
Contacts: Beryllium copper or Phosphor Bronze
Plating: Au 2u" or Sn over 50u" nickel

Electrical Characteristics:
Current Rating: 3.0 AMP
Insulator Resistance: 1000M Ω min.
Contact Resistance: 20m Ω max.
Operating Temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

Pins	DIM A	DIM B	DIM C	DIM D
06	7.62	5.08	7.62	10.16
08	10.16	7.62	7.62	10.16
10	12.70	10.16	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
20	25.40	22.86	10.16	12.70
22	27.94	25.40	10.16	12.70
24	30.48	27.94	10.16	12.70
28	35.56	33.02	10.16	12.70
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	10.16	12.70
32	40.64	38.10	15.24	17.78
36	45.72	43.18	15.24	17.78
40	50.80	48.26	15.24	17.78
42	53.34	50.80	15.24	17.78
48	60.96	58.42	15.24	17.78
50	63.50	60.96	15.24	17.78
52	66.04	63.50	15.24	17.78
50	63.50	60.96	22.86	25.40
52	66.04	63.50	22.86	25.40
64	81.28	78.74	22.86	25.40

Order Information:
L-KLS1-217-XX-Y-1-G3-PC

L: RoHS
XX=No. of 06~64 pins
Material:
Y-Imported Beryllium copper
Z-Domestic Phosphor Bronze
Row spacing Code:
1=7.62mm 2=15.24mm
3=10.16mm 4=22.86mm
Plating: Au 3u"
CP=Without Bar

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.50	UNITS	mm	2.54mm Pitch IC Socket Connector
.X ± 0.25	SCALE	1:1	
.XX ± 0.10	Draw by:	Jenny	KLS P/N: L-KLS1-217-XX-Y-1-G3-PC
ANGLE TOLERANCE	Check by:		
X. $\pm 5^{\circ}$	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X $\pm 3^{\circ}$	SHEET	1 OF 1	
.XX $\pm 2^{\circ}$			