

PCB Connector Series


KLS1-5.08 Pitch=5.08mm TYPE

Electrical Specification:


Rated Voltage: 250V AC/DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage : -25°C~+85°C
P.C board thickness : 1.6mm

Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range : AWG#24~#18

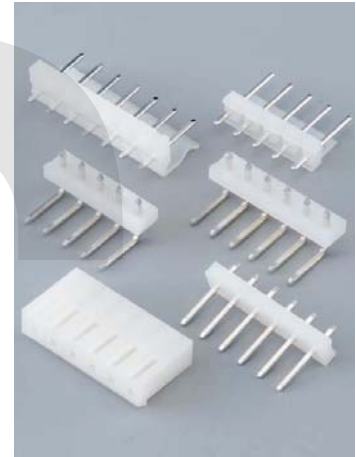

Housing

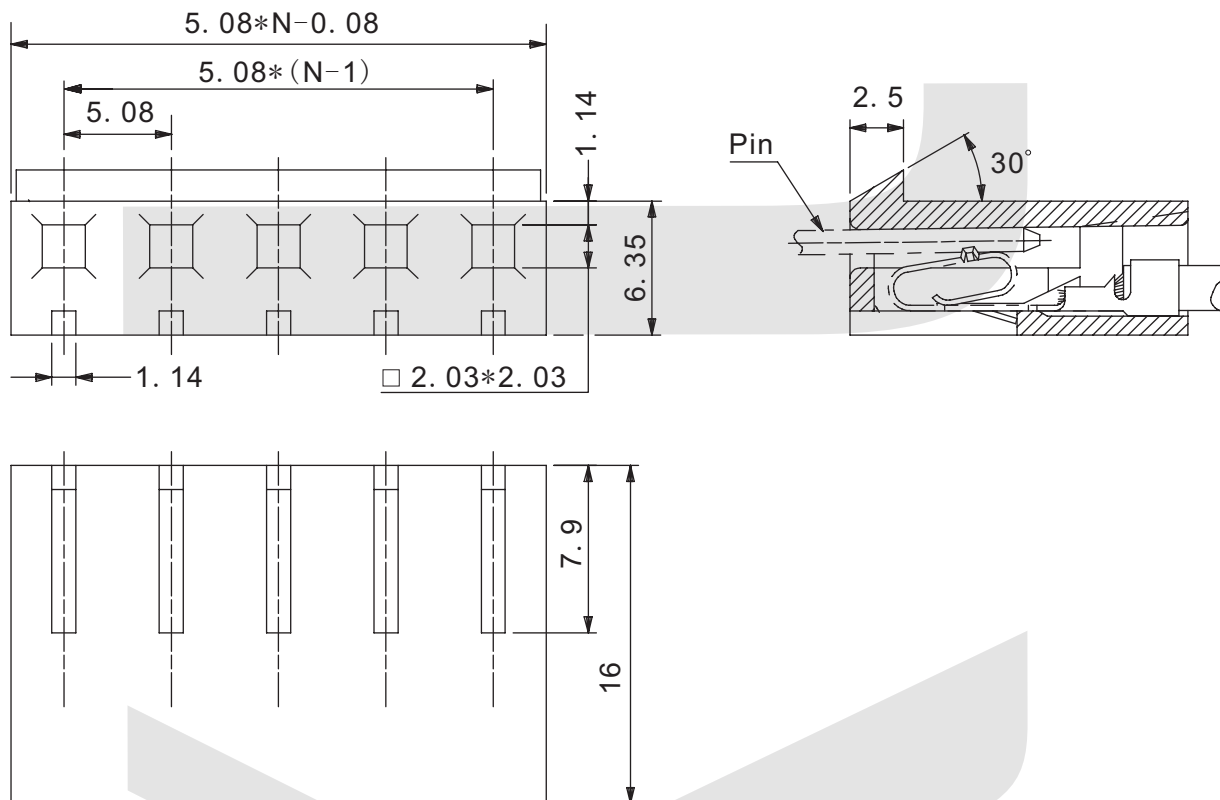

ORDER INFORMATION

Product NO.: KLS1-5.08-XX-H

Pitch: 5.08=5.08mm

Type: H=Housing
S=Straight Male pin
PIN Number: 02 ~ 14Pin

T=Terminal
R=Right Male pin

PCB Connector Series


KLS1-5.08 Pitch=5.08mm TYPE

Electrical Specification:

Rated Voltage: 250V AC/DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage: -25°C~+85°C
P.C board thickness: 1.6mm


Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range: AWG#24~#18

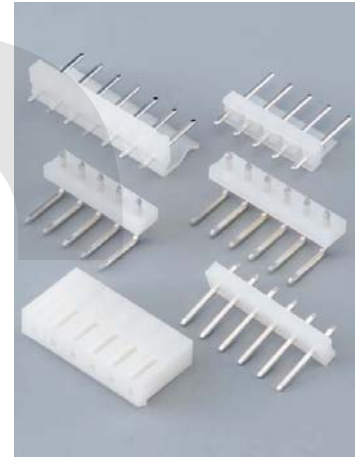

I

Terminal

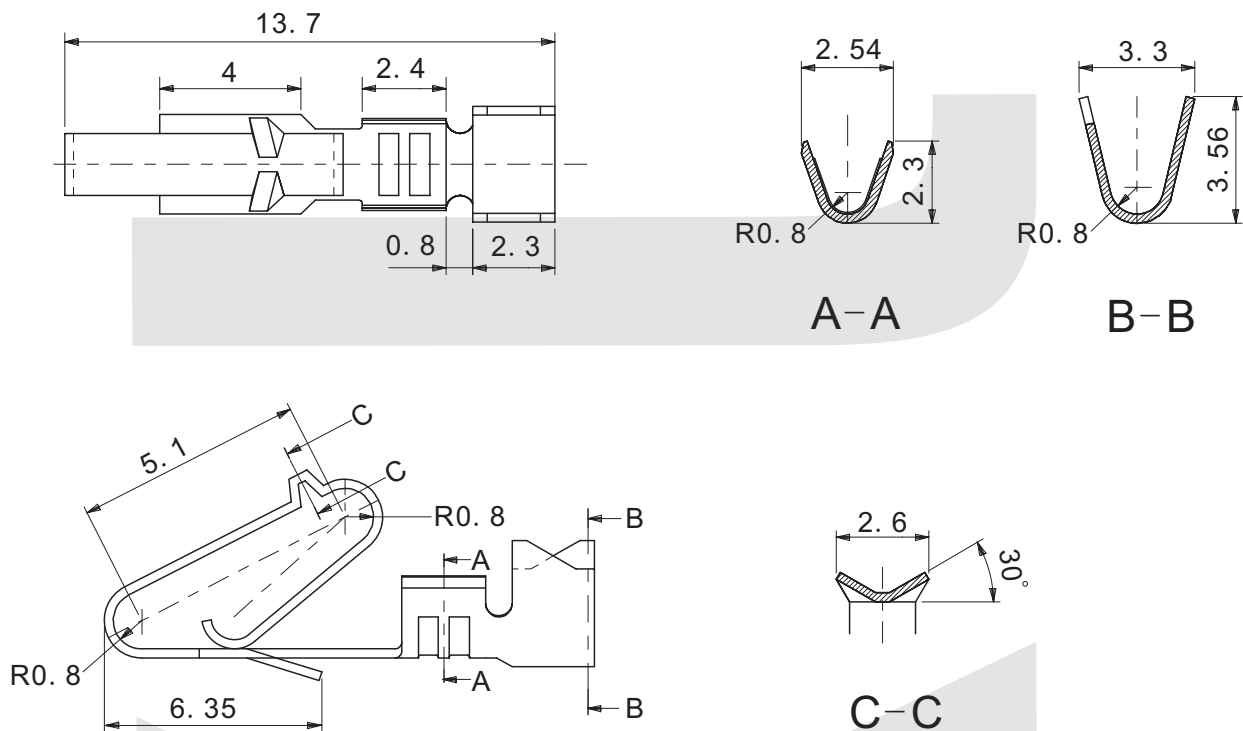

ORDER INFORMATION

Product NO.: KLS1-5.08-T

Pitch: 5.08=5.08mm

Type: H=Housing
S=Straight Male pin
T=Terminal
R=Right Male pin

PCB Connector Series


KLS1-5.08 Pitch=5.08mm TYPE

Electrical Specification:

Rated Voltage: 250V AC/DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage: -25°C~+85°C
P.C board thickness: 1.6mm


Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range: AWG#24~#18

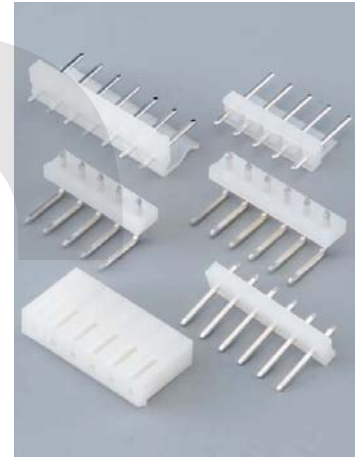

I

Straight

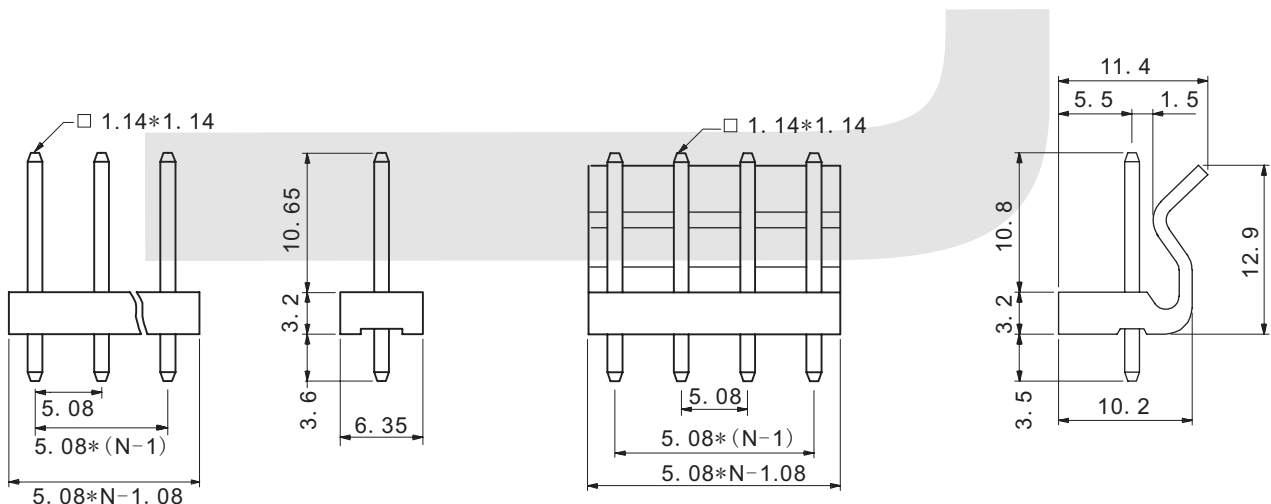

SA Type

S Type

ORDER INFORMATION

Product NO.: KLS1-5.08-XX- S

Pitch: 5.08=5.08mm

Type: H=Housing
S=Straight Male pin
PIN Number: 02 ~ 14Pin

T=Terminal
R=Right Male pin

PCB Connector Series


KLS1-5.08 Pitch=5.08mm TYPE

Electrical Specification:

Rated Voltage: 250V AC/DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage : -25°C~+85°C
P.C board thickness : 1.6mm


Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range : AWG#24~#18

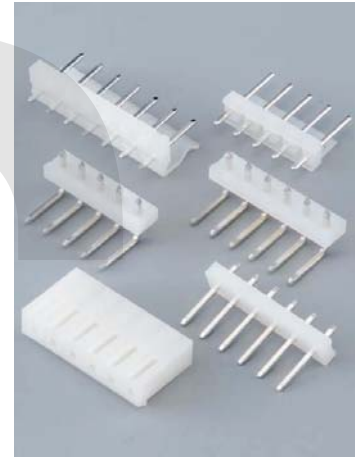

I

Right Male

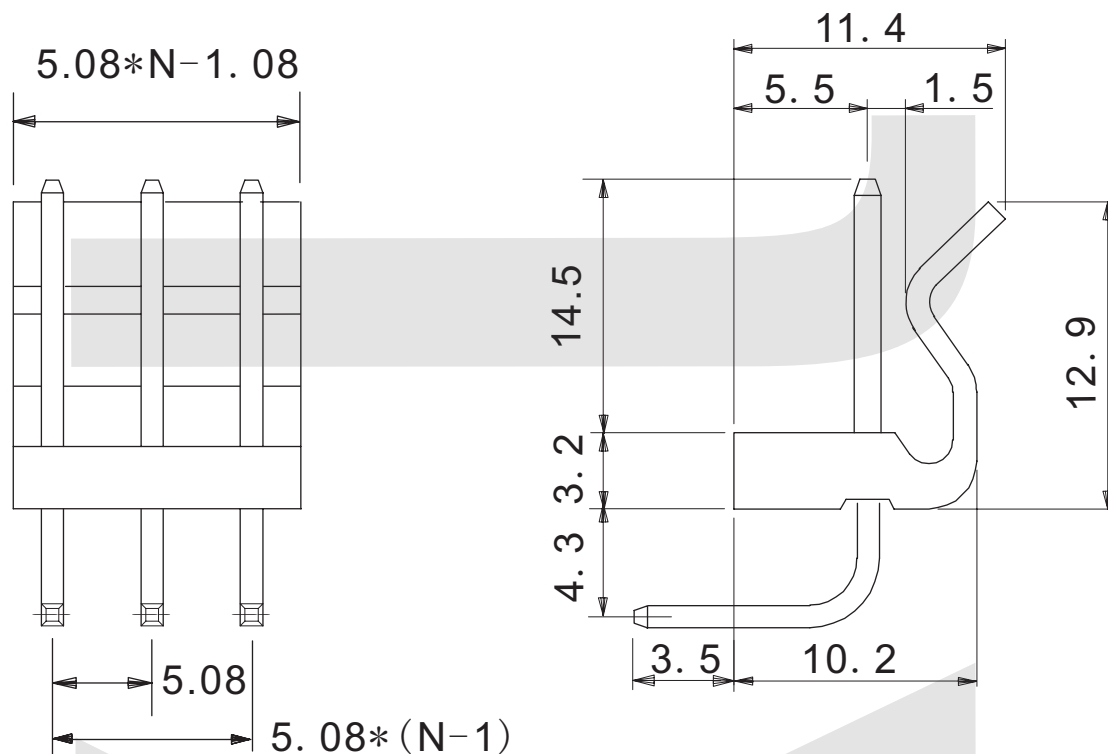

ORDER INFORMATION

Product NO.: KLS1-5.08-XX-R

Pitch: 5.08=5.08mm

Type: H=Housing
S=Straight Male pin
PIN Number: 02 ~ 14Pin

T=Terminal
R=Right Male pin