


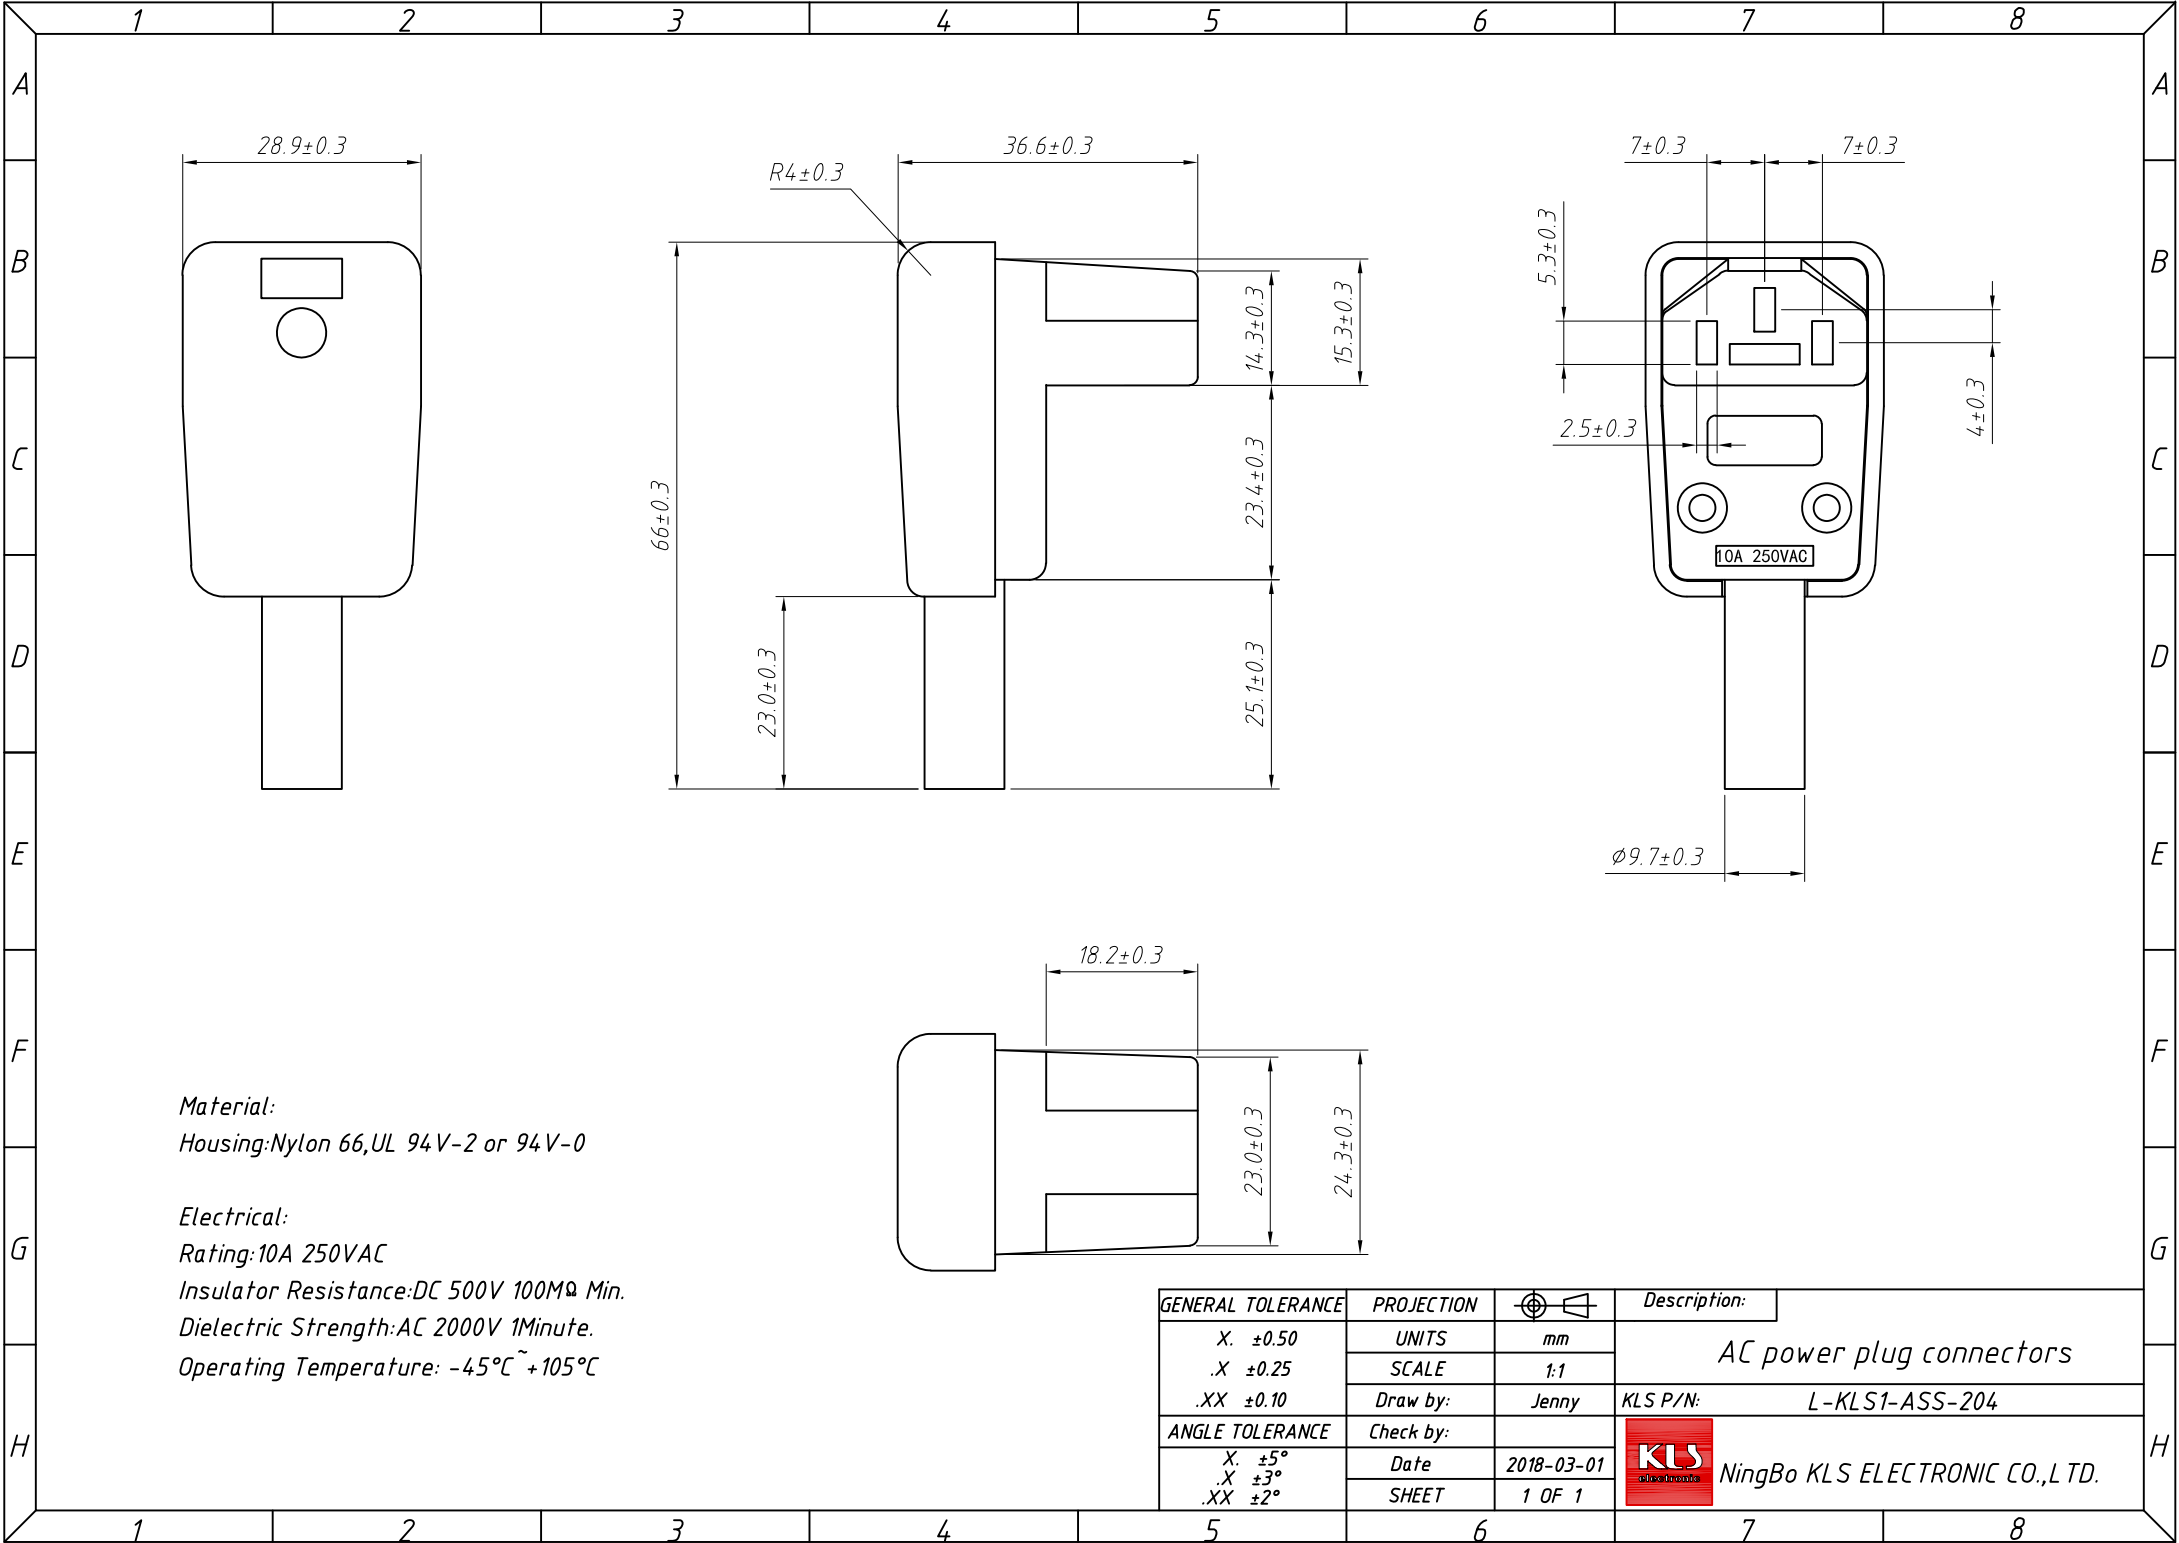

Material:
Housing:Nylon 66,UL 94V-2 or 94V-0

Electrical:
Rating:10A 250VAC
Insulator Resistance:DC 500V 100MΩ Min.
Dielectric Strength:AC 2000V 1Minute.
Operating Temperature: -45℃~+105℃

GENERAL TOLERANCE		PROJECTION		Description:
X.	±0.50	UNITS	mm	AC power plug connectors
.X	±0.25	SCALE	1:1	
.XX	±0.10	Draw by:	Jenny	
ANGLE TOLERANCE		Check by:		KLS P/N: L-KLS1-ASS-204
X.	±5°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X	±3°			
.XX	±2°	SHEET	1 OF 1	