
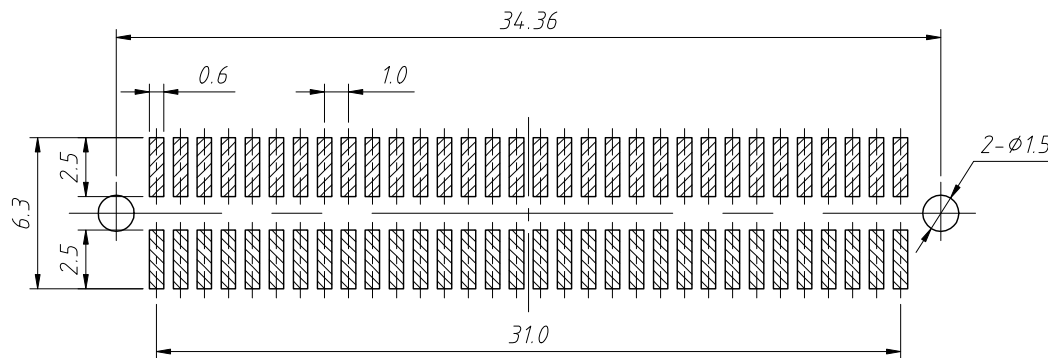
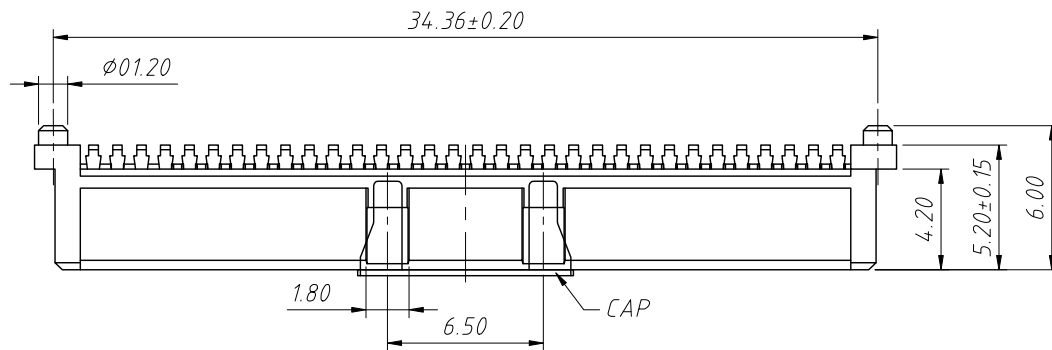


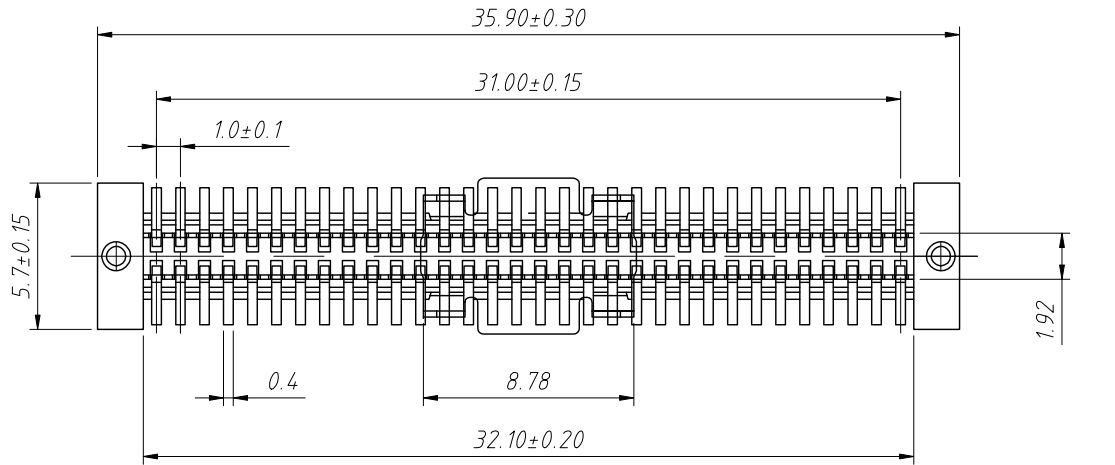

Recommended PCB Layout (Top Side)

1.Electrical:

1.1.Electical Rating:AC/DC 50V 1.0A.

1.2.Contact Resistance:50mΩ max.

1.3.Insulation Resistance:500MΩ Min.

1.4.Withstanding Volt:150V AC/Minute


1.5.Operating Temperature:-40°C To +105°C

2.Material:

2.1.Contact:Phosphor Bronze.

2.2.Housing:LCP,UL 94 V-0

2.3.Max.Processing Temp:230°C For30-60 Seconds.
(260°C For 10 Seconds)

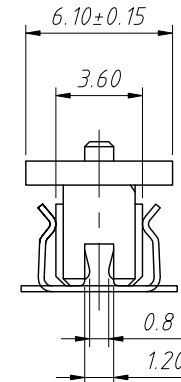

Order Information:

L-KLS1-B0210- 530 F 64-T3R

L: RoHS-
Board To Board-
Pitch-1.00mm
Height-530mm
Type:F-Female
No. Of Contact
Installation mode:
T=SMD Without Post, T3=SMD With Post
Packing:R=Reel T=Tube

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				1.00mm Pitch Board to Board Connector 64Pin H5.2 Female	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-B0210-530F64-T3R
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2022-07-08	KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2020-07-08	