


RoHS Compliance

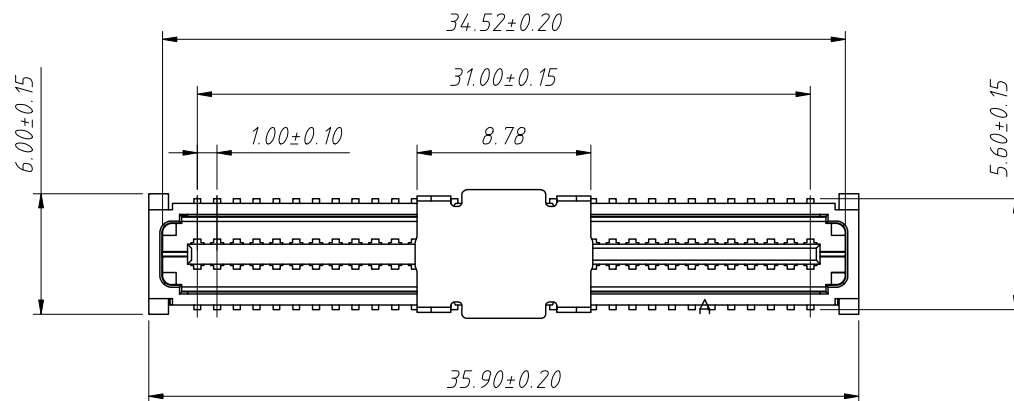

1.Electrical:

1.1.Electical Rating:AC/DC 50V 0.5A.

1.2.Contact Resistance:50mΩ max.

1.3.Insulation Resistance:500MΩ Min.

1.4.Withstanding Volt:150V AC/Minute




1.5.Operating Temperature:-40°C To +105°C

2.Material:

2.1.Contact:Phosphor Bronze Gold-Plated.

2.2.Housing:LCP.

2.3.Max.Processing Temp:230°C For30-60 Seconds.
(260°C For 10 Seconds)

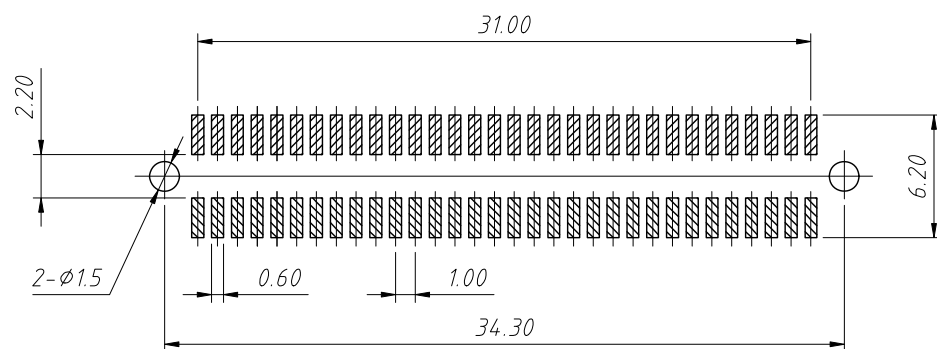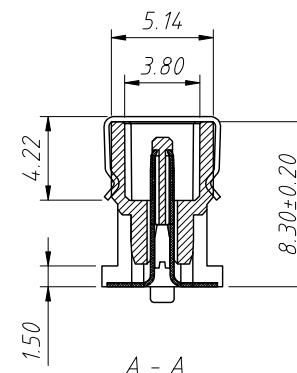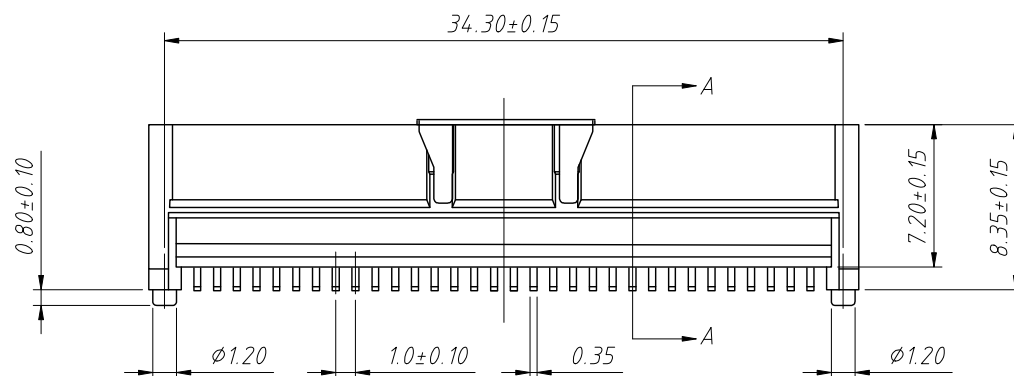

Recommended P.C.Board Layout
PCB Toleranc:±0.05

Order Information:

L-KLS1-B0210-835 M 64-T3R

L: RoHS

Board To Board

Pitch-1.00mm

Height-835mm

Type:M-Male

No. Of Contact

Installation mode:

T=SMD Without Post, T3=SMD With Post

Packing:R=Reel T=Tube

ANGLE TOLERANCE	PROJECTION	Description:	1.00mm Pitch Board to Board Connector 64Pin H8.3 Male
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-B0210-835M64-T3R
x.xx ±0.20	Draw:	Daniel	2020-11-11
x.xxx ±0.10	Check:	Daniel	2020-11-11



KLS ELECTRONIC CO.,L TD.