


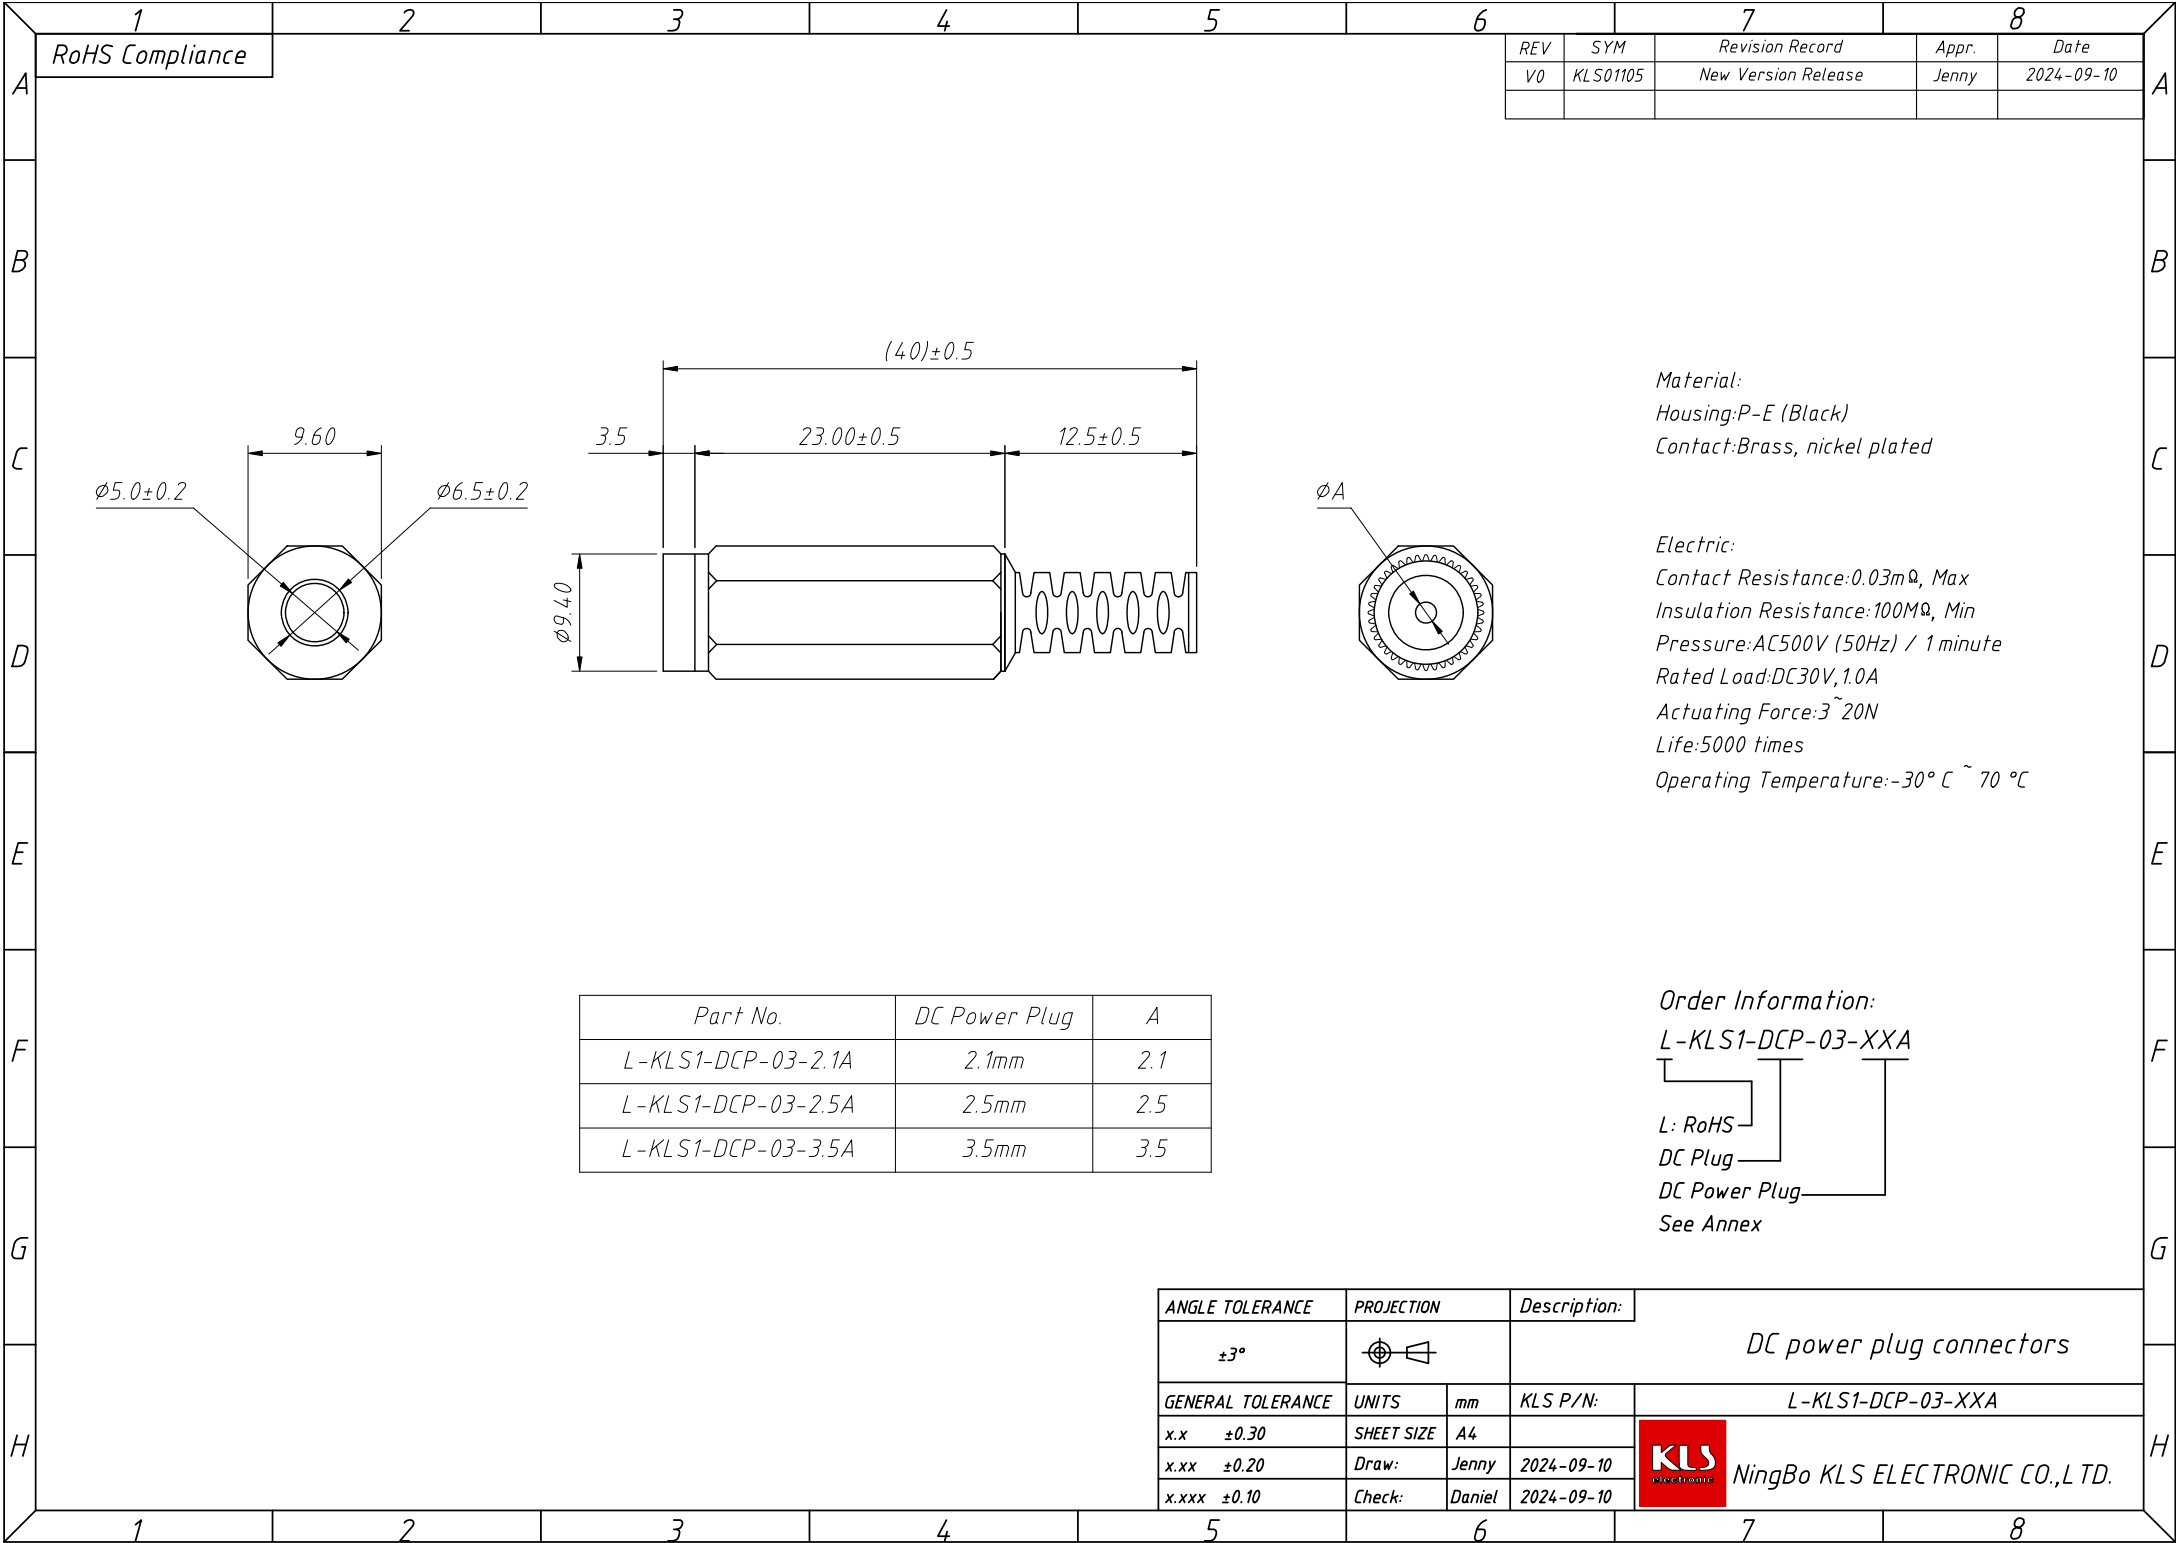

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS01105	New Version Release		Jenny	2024-09-10

Material:
Housing:P-E (Black)
Contact:Brass, nickel plated

Electric:
Contact Resistance:0.03mΩ, Max
Insulation Resistance:100MΩ, Min
Pressure:AC500V (50Hz) / 1 minute
Rated Load:DC30V,1.0A
Actuating Force:3~20N
Life:5000 times
Operating Temperature:-30° C ~ 70 °C

Part No.	DC Power Plug	A
L-KLS1-DCP-03-2.1A	2.1mm	2.1
L-KLS1-DCP-03-2.5A	2.5mm	2.5
L-KLS1-DCP-03-3.5A	3.5mm	3.5

Order Information:
L-KLS1-DCP-03-XXA

L: RoHS
DC Plug
DC Power Plug
See Annex

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				DC power plug connectors	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-DCP-03-XXA
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Jenny	2024-09-10	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	±0.10	Check:	Daniel	2024-09-10	