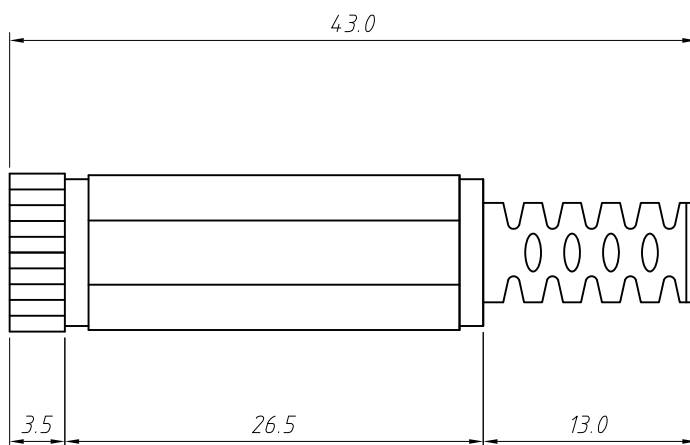


Technical parameters:
Housing Material: PBT or PA66
Center Pin Material: Brass
Rated Load: DC 30V 1.0A
Contact Resistance: $\leq 0.03\Omega$
Insulation Resistance: $\geq 100M\Omega$
Withstand Voltage: AC500V(50Hz) 1min
Operating Temperature: $-30^{\circ}C \sim 70^{\circ}C$
Actuating Force: 3~20N
Life: 5000Time

Order Information

L-KLS1-DCP-07-2.1A

2.1mm DC Power Plug,Black
 Serial number
 DC power connectors
 Type
 RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.50	UNITS	mm	2.1mm DC Power Plug Connector
.X ± 0.25	SCALE	2:1	
.XX ± 0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-DCP-07-2.1A
X. $\pm 5^{\circ}$	Date	2018-03-01	 KLS ELECTRONIC CO.,L TD.
.X $\pm 3^{\circ}$	SHEET	1 OF 1	
.XX $\pm 2^{\circ}$			