


CH1 A/R SWR

1: 1.198U

MKR

REF 1.000 U

1.000 U/ 2400 000 000.HZ

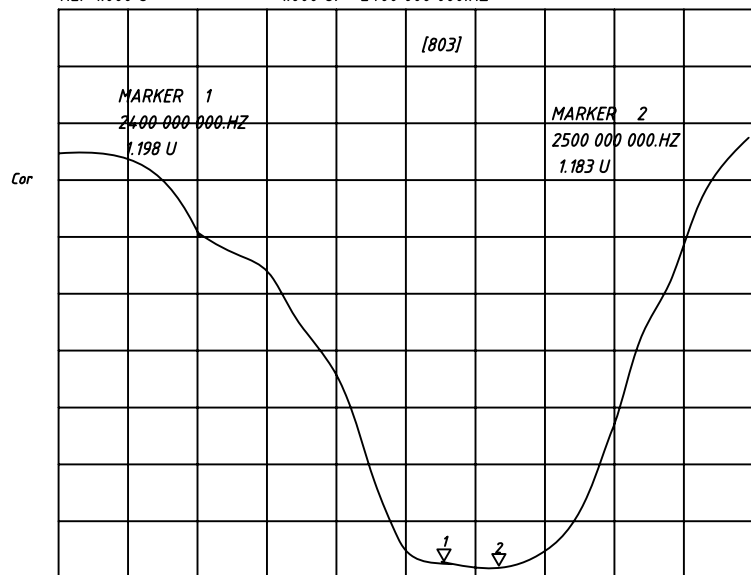

CH1 START 2000 000 000.HZ

STOP 2 700 000 000.HZ

Specification:

Frequency : 2400~2500MHz

Gain : 2dBi

Vswr : 1.5 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL


Max power : 50W

Shell material : PVC

Connector : SMA Pin Right angle

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

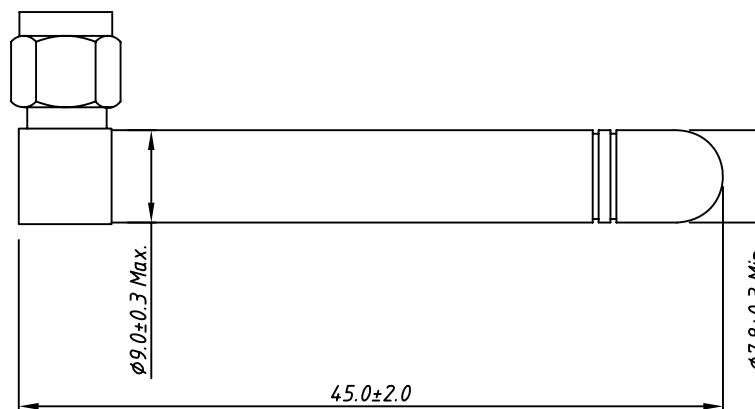

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60		X. ±5°		UNITS	mm	WIFI 2.4G Antenna
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°			KLS P/N:	
						KLS1-WIFI-2.4G-02-MR-45MM
Draw by: Date		2016-11-11		KLS ELECTRONIC CO., LTD.		
Check by:: Date		2016-11-11				
SCALE		SHEET	OF			