




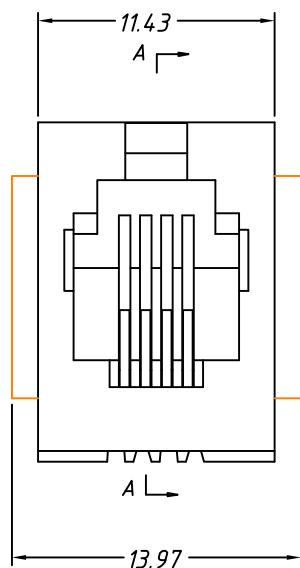

With Panel

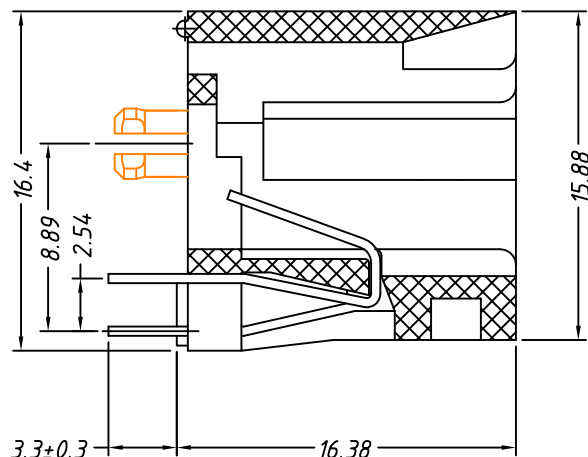

SECTION A-A

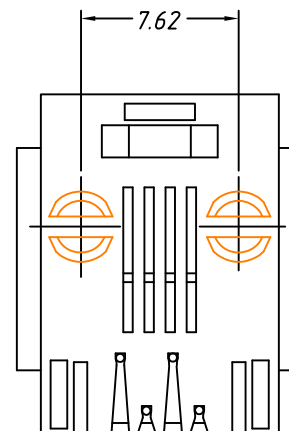


Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL 94 V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$


Order Information

L-KLS12-153-4P4C-X-X-1-XX


RoHS _____
Contacts: 4P4C _____
Panel Code: W-with Panel _____
W/O-without Panel _____
Peg Code: L-L Peg S-Split Peg _____
Color Code: 1-Black _____
Plating Code: _____
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating



Without Panel

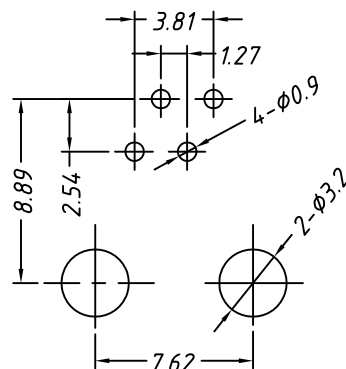

PCB Layout

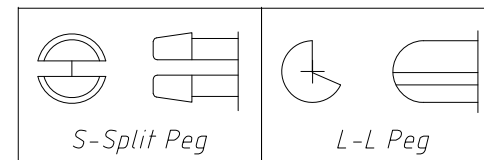

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.30	UNITS	mm	RJ11-4P4C Vertical Modular jacks, Black
.X ± 0.25	SCALE	1:1	
.XX ± 0.20	Draw by:	Jenny	KLS P/N: L-KLS12-153-4P4C-X-X-1-XX
ANGLE TOLERANCE	Check by:	Daniel	
X. $\pm 3^{\circ}$	Date	2019-12-26	NingBo KLS ELECTRONIC CO.,LTD.
.X $\pm 2^{\circ}$	SHEET	1 OF 1	
.XX $\pm 1^{\circ}$			