

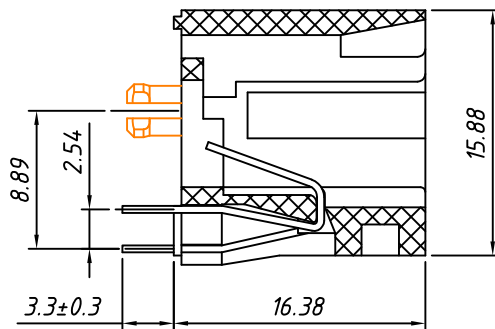



With Panel



SECTION A-A



Without Panel

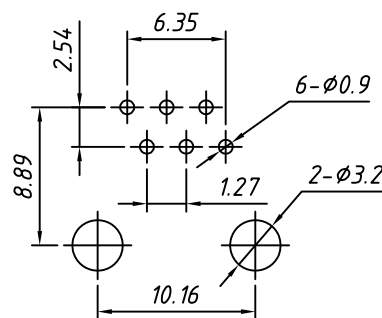

PCB Layout

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL 94 V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +70°C

Order Information

L-KLS12-154-6P6C-X-X-1-XX

RoHS
 Contacts: 6P6C
 Panel Code: W-with Panel
 W/O-without Panel
 Peg Code: L-L Peg S-Split Peg
 Color Code: 1-Black
 Plating Code:
 01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating



S-Split Peg



L-L Peg

GENERAL TOLERANCE	PROJECTION	Description:
X. ± 0.30	UNITS	mm
.X ± 0.25	SCALE	1:1
.XX ± 0.20	Draw by:	Jenny
ANGLE TOLERANCE	Check by:	Daniel
X. $\pm 3^\circ$	Date	2019-12-26
.X $\pm 2^\circ$	SHEET	1 OF 1
.XX $\pm 1^\circ$		



NingBo KLS ELECTRONIC CO.,LTD.