


BUZZER

SMD Magnetic Buzzers



KLS3-SMT-09*04 SMD Electro-magnetic Buzzer

Parameters:

Rated Voltage : 5V
Operating Voltage : 2~5V
Coil Resistance : $30 \pm 3\Omega$
Resonant Frequency : 2700Hz
Sound Output at 10cm : $\geq 90\text{dB}$
Current Consumption : $\leq 80\text{mA}$
Operating Temperature : $-20^\circ\text{C} \sim +70^\circ\text{C}$
Storage Temperature : $-30^\circ\text{C} \sim +80^\circ\text{C}$
Weight : 0.8g
Housing Material:PPS
RoHS: Yes

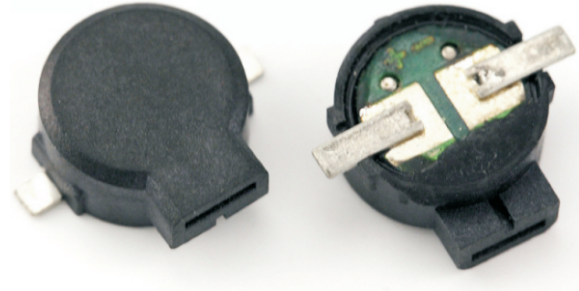

Tolerance: $\pm 0.5\text{mm}$ Except Specified

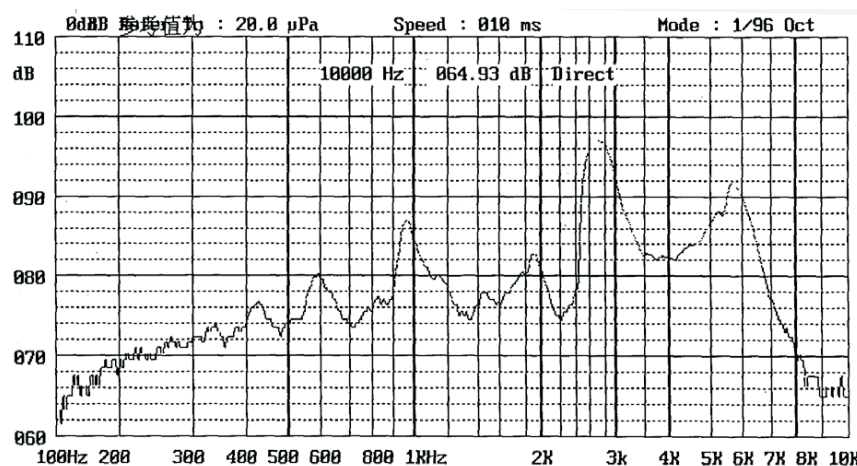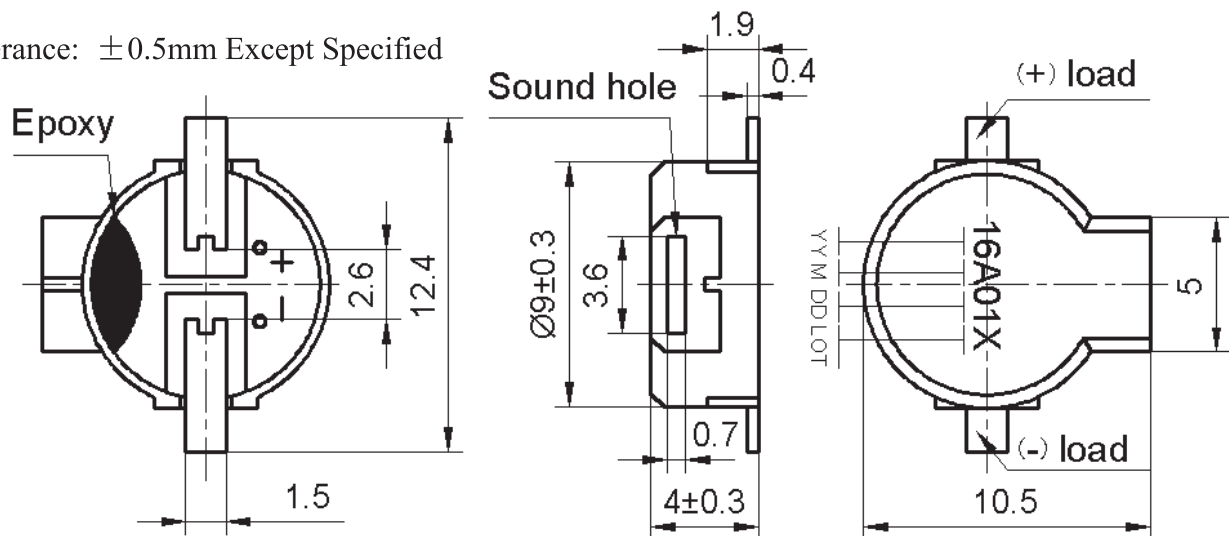

ORDER INFORMATION

Product NO.: KLS3-SMT-09*04

Part Number
Without Circuit Piezo Transducer Buzzer Series

Size specifications:
09*04mm (Diameter*High)