

# BUZZER

## SMT Buzzer Series



KLS3-SMT-14\*04 14.4\*14.4\*4.3mm SMT Transducer Buzzer Series

### SPECIFICATIONS

Rated Voltage	5V <sub>P-P</sub>
Operating Voltage	2-25V <sub>P-P</sub>
Max.Rated Current	2mA
Min.S.P.L. (@ 10cm)	83dB
Resonant Frequency	4.0KHz
Capacitance at 100Hz	10000±30%pF
Operating Temp	-20 ~ +70 ° C
Weight	1.2g



Dimensions (Unit:mm)

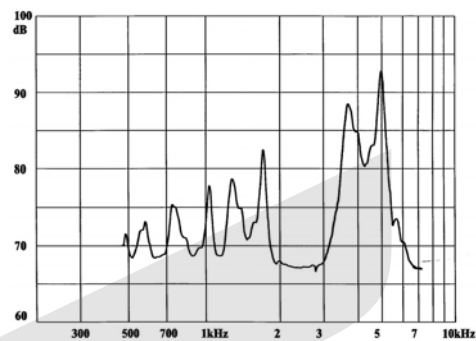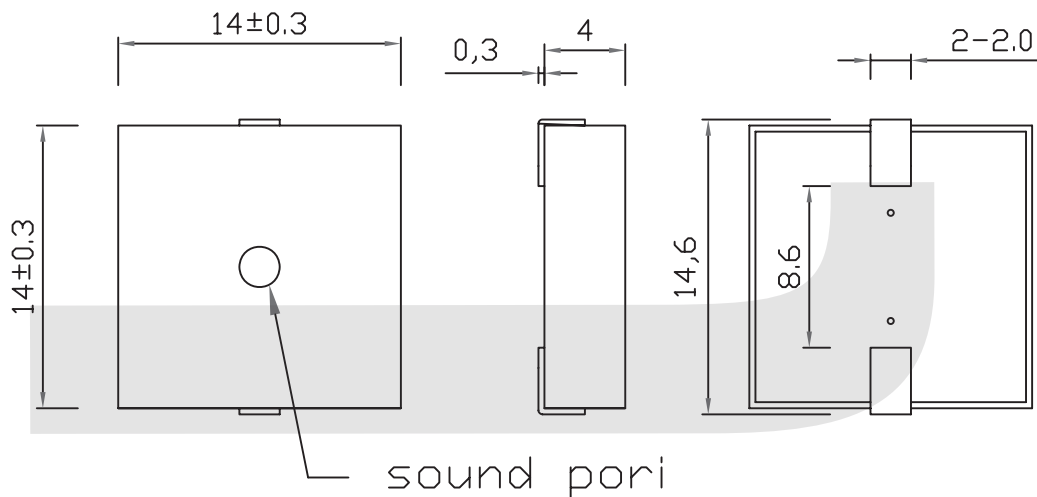

## ORDER INFORMATION

Product NO.: **KLS3-SMT - 14\*04**

Part Number

SMT Buzzer Series

Size specifications