
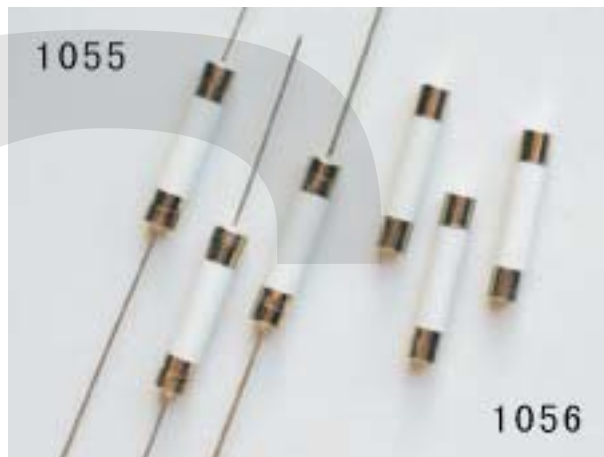


FUSE AND FUSE HOLDER

Φ6.35x32(30) Ceramic Tube Fuse Series


KLS5-1055/1056 Φ6.35x32(30) Ceramic Tube Fuse (Fast Blow) Series

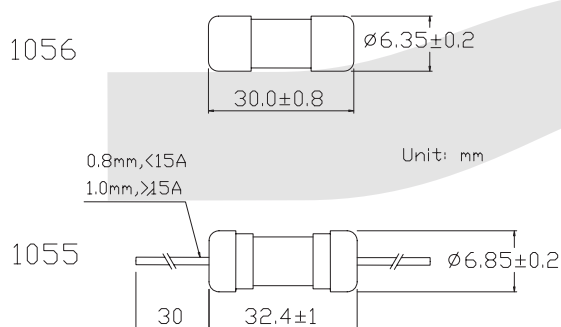

ELECTRICAL CHARACTERISTICS

Rating	Blowing TIME
100%	4 hour Min
135%	1 hour Max
200%	120 sec Max

I-T CHARACTERISTICS CURVE
电流-时间曲线图

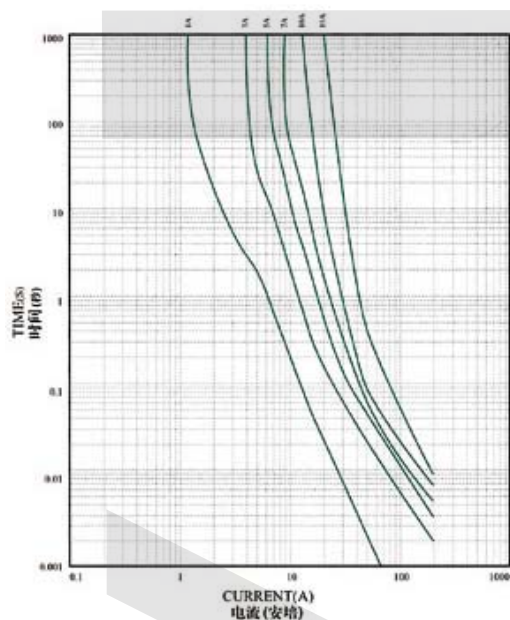

Product Model	Rated Current	Rated Volta	Product Model	Rated Current	Rated Volta
1056-0100	100mA	125V/250V	1055-0100	100mA	125V/250V
1056-0125	125mA	125V/250V	1055-0125	125mA	125V/250V
1056-0150	150mA	125V/250V	1055-0150	150mA	125V/250V
1056-0160	160mA	125V/250V	1055-0160	160mA	125V/250V
1056-0200	200mA	125V/250V	1055-0200	200mA	125V/250V
1056-0250	250mA	125V/250V	1055-0250	250mA	125V/250V
1056-0300	300mA	125V/250V	1055-0300	300mA	125V/250V
1056-0315	315mA	125V/250V	1055-0315	315mA	125V/250V
1056-0350	350mA	125V/250V	1055-0350	350mA	125V/250V
1056-0400	400mA	125V/250V	1055-0400	400mA	125V/250V
1056-0500	500mA	125V/250V	1055-0500	500mA	125V/250V
1056-0600	600mA	125V/250V	1055-0600	600mA	125V/250V
1056-0700	700mA	125V/250V	1055-0700	700mA	125V/250V
1056-0750	750mA	125V/250V	1055-0750	750mA	125V/250V
1056-0800	800mA	125V/250V	1055-0800	800mA	125V/250V
1056-1000	1A	125V/250V	1055-1000	1A	125V/250V
1056-1200	1.2	125V/250V	1055-1200	1.2	125V/250V
1056-1250	1.25A	125V/250V	1055-1250	1.25A	125V/250V
1056-1500	1.5A	125V/250V	1055-1500	1.5A	125V/250V
1056-1600	1.6A	125V/250V	1055-1600	1.6A	125V/250V
1056-1800	1.8A	125V/250V	1055-1800	1.8A	125V/250V
1056-2000	2A	125V/250V	1055-2000	2A	125V/250V
1056-2500	2.5A	125V/250V	1055-2500	2.5A	125V/250V
1056-3000	3A	125V/250V	1055-3000	3A	125V/250V
1056-3150	3.15A	125V/250V	1055-3150	3.15A	125V/250V
1056-3500	3.5	125V/250V	1055-3500	3.5	125V/250V
1056-4000	4A	125V/250V	1055-4000	4A	125V/250V
1056-5000	5A	125V/250V	1055-5000	5A	125V/250V
1056-6000	6A	125V/250V	1055-6000	6A	125V/250V
1056-6300	6.3A	125V/250V	1055-6300	6.3A	125V/250V
1056-7000	7A	125V/250V	1055-7000	7A	125V/250V
1056-8000	8A	125V/250V	1055-8000	8A	125V/250V
1056-10000	10A	125V/250V	1055-10000	10A	125V/250V
1056-12000	12A	125V/250V	1055-12000	12A	125V/250V
1056-15000	15A	125V/250V	1055-15000	15A	125V/250V
1056-20000	20A	125V/250V	1055-20000	20A	125V/250V
1056-25000	25A	125V/250V	1055-25000	25A	125V/250V
1056-30000	30A	125V/250V	1055-30000	30A	125V/250V

ORDER INFORMATION

Product NO.: KLS5-1055-XXXX

Rated Current
Lead Type: 1055=With Lead 1056=No Lead
Part Number