

## Coin Cell Holders


KLS5-CR2032-08 DIP 90° CR2032 Coin Battery Holder

**Material:**

Housing: PBT  
Contacts: Phosphor Copper, Tinning

**Electrical Characteristics:**

Insulator Resistance: 1000M Ohm min.  
Contact Resistance: 30m Ohm max.  
Dielectric voltage: 750V AC  
Operating Temperature: -25°C~+85°C

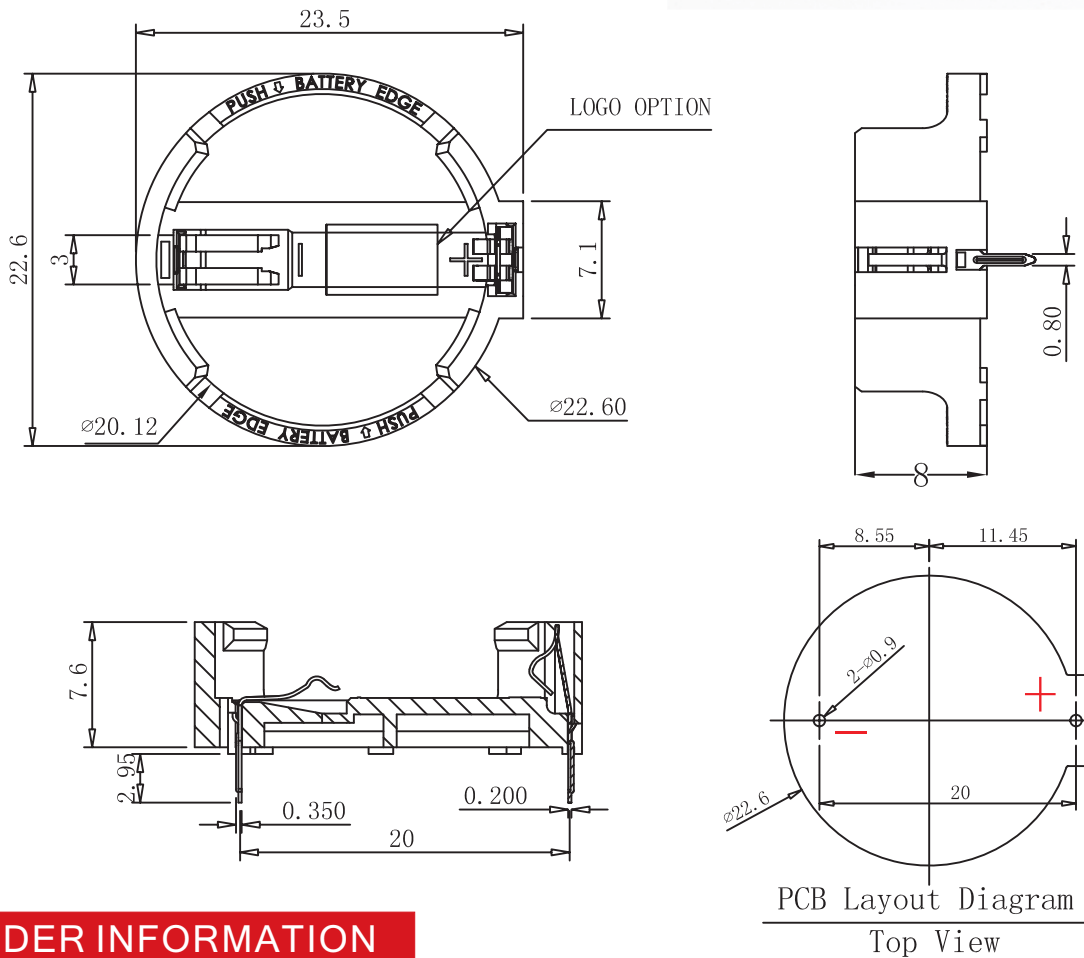

## ORDER INFORMATION

Product NO.: KLS5-CR2032-08

