


Carbon Film Fixed Resistors Series

KLS6-Carbon Film Fixed Resistors Series

1.Features


- Temperature Range -55 °C ~ +155 °C
- $\pm 5\%$ tolerance
- High quality performance at economical prices
- Compatible with automatic insertion equipment
- Flame retardant type available
- Weldable type with copper plated lead wire available
- Values below 1 Ω or above 10M Ω are available by special request, please ask for details

Dimension (Unit: mm)




Code	power	Dimension(mm)				Max. w orking voltage	Max. Permission voltage	Insulation dielectric strength	Resistance range
	(70° C)	D Max.	L Max.	d +0.02 -0.05	H±3				
Standard Size									
1/8W	1/8W	1.85	3.5	0.5	28	200V	400V	400V	1Ω~10MΩ
1/4W	1/4W	2.5	6.8	0.6	28	250V	500V	500V	1Ω~10MΩ
1/2W	1/2W	3.5	10	0.6	28	350V	700V	700V	1Ω~10MΩ
1W	1W	5	12	0.7	28	500V	1000V	1000V	1Ω~10MΩ
2W	2W	5.5	16	0.8	28	500V	1000V	1000V	1Ω~10MΩ
Small Size									
1/4WS	1/4W	1.85	3.5	0.5	28	200V	400V	400V	1Ω~10MΩ
1/2WS	1/2W	2.5	6.8	0.6	28	250V	500V	500V	1Ω~10MΩ
1WS	1W	3.5	10	0.6	28	500V	1000V	1000V	1Ω~10MΩ
2WS	2W	5	12	0.7	28	500V	1000V	1000V	1Ω~10MΩ
3WS	3W	5.5	16	0.8	28	500V	1000V	1000V	1Ω~10MΩ


DERATING CURVE

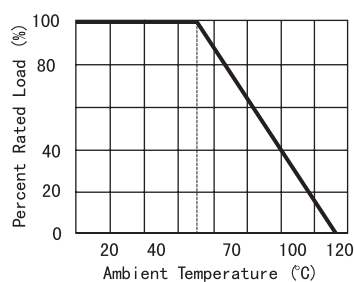

CURRENT NOISE

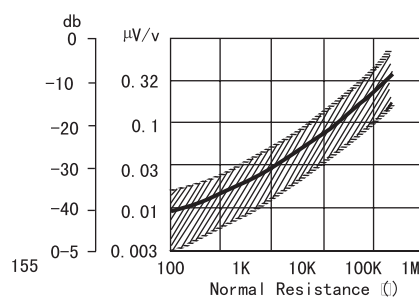

TEMPERATURE COEFFICIENT

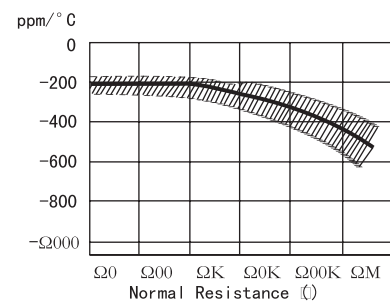

ORDER INFORMATION

KLS6-CF-1/8W- 10KR-J A

Part Number _____ Packing Type: A = Tape / Box R = Tape / Reel B = Bulk / Box
 Carbon Film Fixed Resistors _____ Tolerance: J = $\pm 5\%$
 Power Code _____ Standard Values

Carbon Film Fixed Resistors Series

KLS6-Carbon Film Fixed Resistors Series

■ CHARACTERISTICS

Characteristics	Limits		Test Methods (JIS C 5201-1)		
DC. Resistance	Must be within the specified tolerance.		5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance		
Temperature coefficient	Resist. Range	T.C.R. (PPM / °C)	5.2 Natural resistance change per temp. degree centigrade. R2-R1 ———— x106 (PPM/°C) R1(t2-t1) R1: Resistance value at room temperature (t1) R2: Resistance value at room temp.plus 100°C (t2)		
	< 10 Ω 11Ω ~ 99K 100K ~ 1M 1.1M ~ 10M	0 ~ ±350 0 ~ -450 0 ~ -700 0 ~ -1500			
Short time overload	Resistance change rate is ± (1 % + 0.05Ω) Max. with no evidence of mechanical damage		5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.		
Insulation Resistance	Insulation resistance is 10,000 MΩ Min		5.6 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at DC potential respectively specified in the above list for 60 +10/ -0 seconds.		
Dielectric withstanding voltage	No evidence of flashover mechanical damage,arcing or insulation break down.		5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the table 1 for 60 + 10/-0 seconds.		
Terminal strength	No evidence of mechanical damage.		6.1 Direct load Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads. Twist test : Terminal leads shall be bent through 90° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.		
Resistance to soldering heat	Resistance change rate is ± (1% + 0.05Ω) Max. with no evidence of mechanical damage.		6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in 350 °C ± 10°C solder for 3 ± 0.5 seconds		
Solderability	95 % coverage Min.		6.5 The area covered with a new , smooth clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder : 245°C ± 3°C Dwell time in solder : 2 ~ 3 seconds		
Temperature cycling	Resistance change rate is ± (1% + 0.05Ω) Max. with no evidence of mechanical damage.		7.4 Resistance change after continuous 5 cycles for duty shown below:		
			Step	Temperature	Time
			1	-55°C ±3°C	30 mins
			2	Room temp.	10~15 mins
			3	+155°C ±2°C	30 mins
4	Room temp.	10~15 mins			
Load life in humidity	Resistance value		7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at 40°C ± 2°C and 90 to 95 % relative humidity		
	Normal Type	< than 100KΩ >100KΩ		± 3 % ± 5 %	
Load life	Resistance value		7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at 70°C ± 2°C ambient		
	Normal Type	< than 56KΩ > 56KΩ		± 2 % ± 3 %	

ORDER INFORMATION

Part Number **KLS6-CF-1/8W- 10KR-J A**
 Carbon Film Fixed Resistors
 Power Code

Packing Type: A = Tape / Box R = Tape / Reel B = Bulk / Box
 Tolerance: J = ± 5%
 Standard Values