

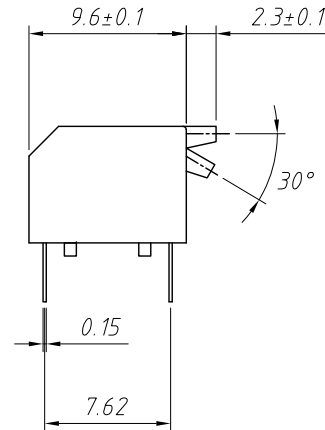
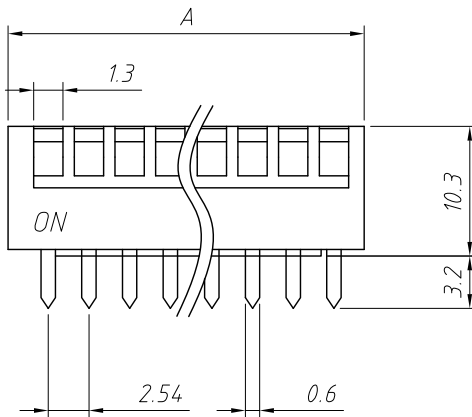


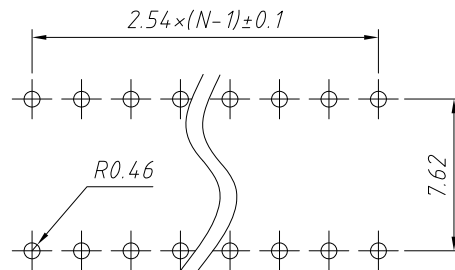


Switching Characteristics:
Mechanical life: 2000 operations per switch
Operation Force : ≤9.8N max.
Stroke: 2.0mm
Operation Temp: -20°C ~ +70°C
Electrical life: 2000 operations per switch-24 VDC 25mA
Contact Resistance: 50m max. at initial
Non-Switching Rating: 100mA, 50VDC
Switching Rating: 25mA, 24VDC
Circuit: Single pole single throw
Contact: Half Gold/Sn

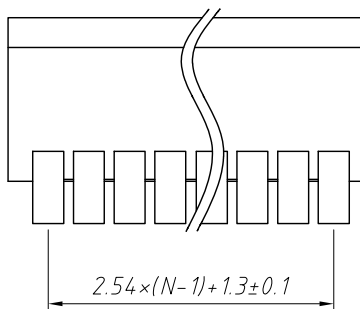

PCB Layout

Schematic

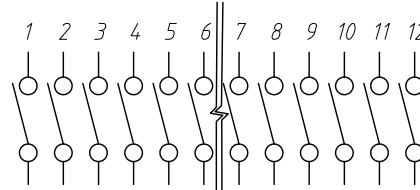

Model No.	No.Pos.	A
DPT-01	1	4.10
DPT-02	2	6.64
DPT-03	3	9.18
DPT-04	4	11.72
DPT-05	5	14.26
DPT-06	6	16.80
DPT-07	7	19.34
DPT-08	8	21.88
DPT-09	9	24.42
DPT-10	10	26.96
DPT-12	12	32.04

Order Information

L-KLS7-DPT-XX-X-X-X

Packaging: 0=Tube 1=Tape
 0=Non-sealed 1=With sealed
 Color: R=Red, B=Blue, N=Black
 Number of Pos.: 01~12 Pos.
 Dip Switch
 RoHS

Soldering and Cleaning Processes Keep all switch contacts in their "OFF" position for all operations

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Half Gold/Sn SPST Standard Piano Type
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	KLS P/N: L-KLS7-DPT
ANGLE TOLERANCE	Check by:		 NingBo KLS ELECTRONIC CO.,L TD.
X. ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 1	
.XX ±2°			