

Switch

DIP Switch Series






KLS7-KLR End-stackable SMT Type DIP Switch

Specifications

Contact Rating:	25 mA at 24VDC(switching) 100 mA at 50VDC(steady state)
Life:	1,000 cycles
Contact Resistance:	100mΩ Max.
Insulation Resistance:	100MΩ at 100VDC Min
Dielectric Strength:	300VAC Min
Storage Temperature:	-40°C ~ 85°C
Operating Temperature:	-25°C ~ 70°C.
Operation Force :	8N Max.

Materials

Base & Cover:	PPS (UL94V-0)
Actuator:	PA46 (UL94V-0).
Contacts:	Brass, Gold /Tin Plate
Terminals:	Brass, Gold /Tin Plate
Mylar:	0.05mm UL94V-0 Mylar

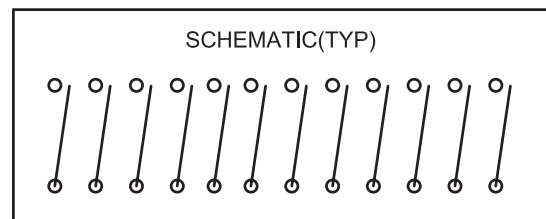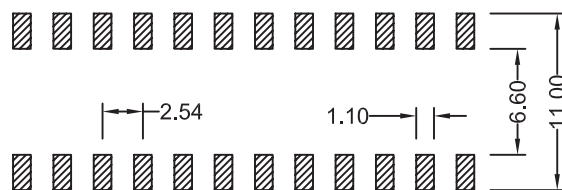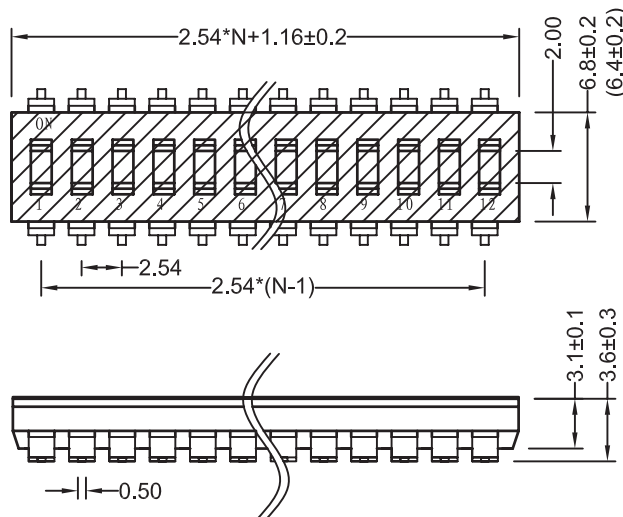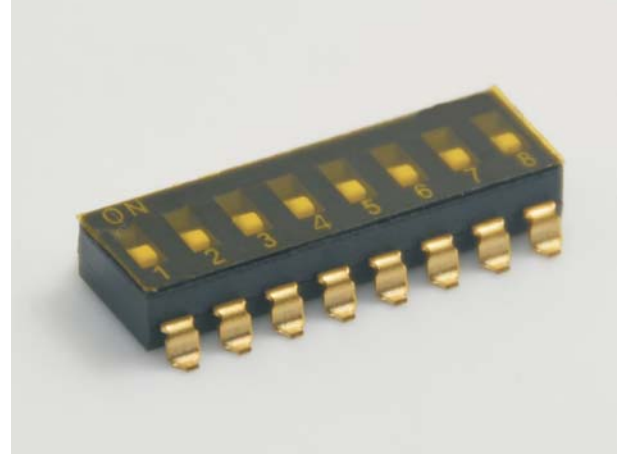

P.C.B. LAYOUT

ORDER INFORMATION

KLS7-KL - XX - N - 0 0

Part Number	KLS7-KL	XX	N	0	0	Packaging: 0=Tube 1=Tape
KLR: Recessed Type Dip Switch						1: With sealed
Number of Pos.: 02~12 Pos.						Color: N=Black