

## Switch

## DIP Switch Series






## KLS7-KM End-stackable Through Hole Type DIP Switch

## Specifications


|                        |                                                              |
|------------------------|--------------------------------------------------------------|
| Contact Rating:        | 25 mA at 24VDC (switching)<br>100 mA at 50VDC (steady state) |
| Life:                  | 1,000 cycles                                                 |
| Contact Resistance:    | 100mΩ Max.                                                   |
| Insulation Resistance: | 100MΩ at 100VDC Min                                          |
| Dielectric Strength:   | 300VAC Min                                                   |
| Storage Temperature:   | -40°C ~ 85°C                                                 |
| Operating Temperature: | -25°C ~ 70°C.                                                |
| Operation Force :      | 8N Max.                                                      |

## Materials

Base & Cover: PPS (UL94V-0)  
 Actuator: PA46 (UL94V-0).  
 Contacts: Brass, Gold /Tin Plate  
 Terminals: Brass, Gold /Tin Plate

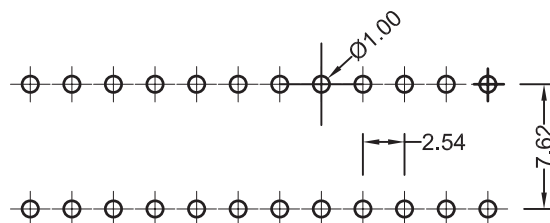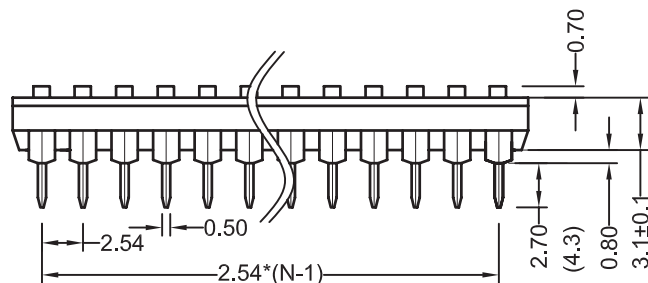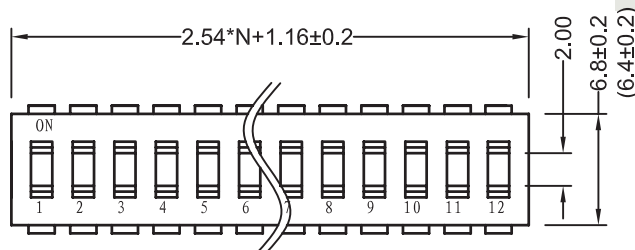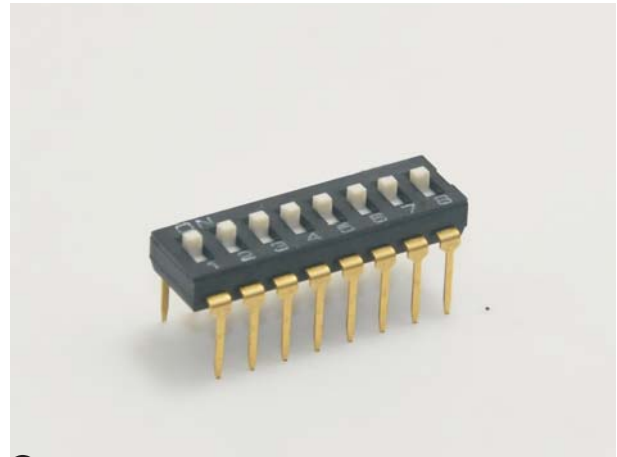

## P.C.B. LAYOUT

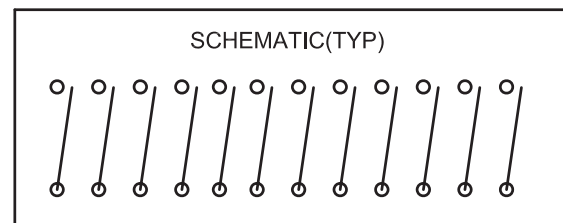

## ORDER INFORMATION

KLS7-KM - XX - N - 0 0

Part Number \_\_\_\_\_  
 KM :Bulge Type Dip Switch \_\_\_\_\_  
 Number of Pos.: 01~12 Pos. \_\_\_\_\_

Packaging: 0=Tube  
 0:Non-sealed

Color: N=Black