



Switch

Standard Vertical Push Switch Series


KLS7-P7.0X7.0 Standard Vertical Push Switch Series

ELECTRICAL


Rating :DC30V 0.1A
Insulation Resistance :>100MΩ DC125V
Withstand Voltage :AC 125V 1 minute
Contact Resistance :<100mΩ
Soldering Temper :250°C max.3sec
Mechanical Life :100,000 cycles
Electrical Life :10,000 cycles
Ambient Temper.Used :-25°C to +65°C
Ambient Humidity Used :<85% RH
Operating force :150±80 gf

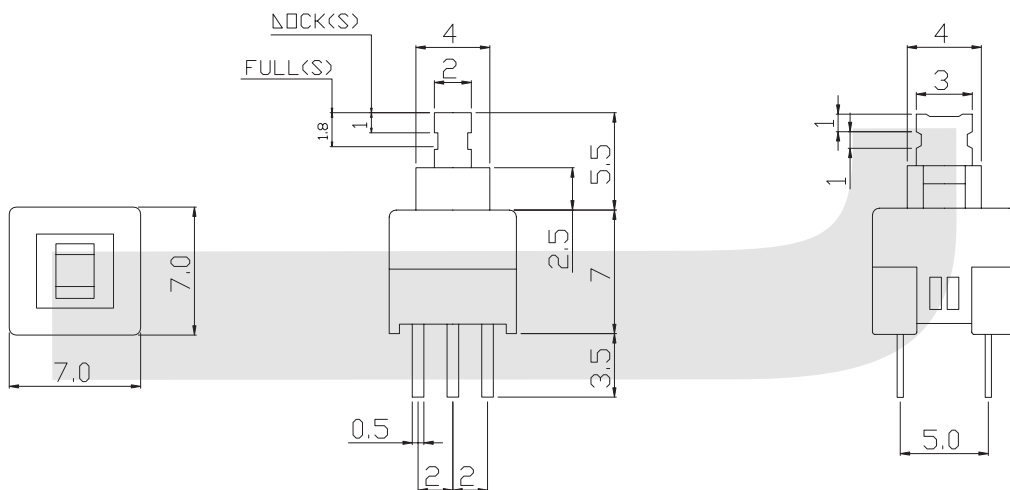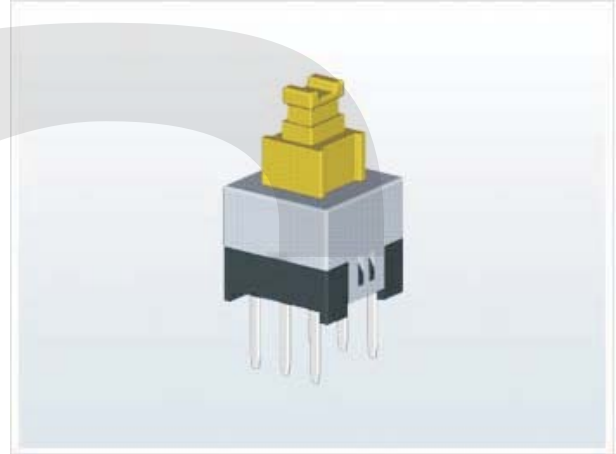


FREE



PUSH



SCHEMATIC



ORDER INFORMATION

Part Number **KLS7-P7.0x7.0 X**
Standard Vertical Push Switch Series
0=Non Lock 1=lock