

Tactile Switches


KLS7-TS0304 Tactile switch SMD

Characteristics:

Rating:DC12V 50mA
Travel:0.20±0.1mm
Operating Force:160 ~ 260±50gf
Contact Resistance:100mΩ Max.
Life:50000 ~ 100000 Cycles Min.
Operating temperature range: -20℃ ~ 70℃



Dimensions

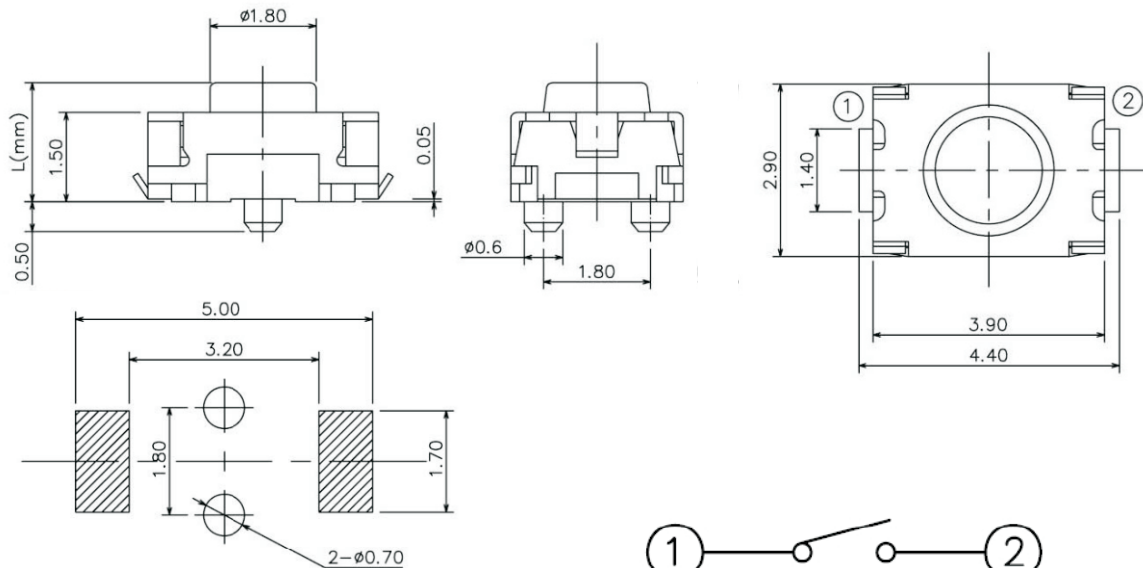

Mounting Holes

Contact Configuration

产品编号	高度 (L)	动作力	定位柱	操作方向	行程	操作寿命 (5mA 12V DC)	初期接触电阻
TS0304-1.8-160-T-2.0H	L=2.0	1.57N	有	Top push	0.20m	100,000 cycles	100mΩ max.
TS0304-1.8-260-T-2.0H	L=2.0	2.55N	有	Top push	0.20m	50,000 cycles	100mΩ max.
TS0304-1.8-160-T-2.5H	L=2.5	1.57N	有	Top push	0.20m	100,000 cycles	100mΩ max.
TS0304-1.8-260-T-2.5H	L=2.5	2.55N	有	Top push	0.20m	50,000 cycles	100mΩ max.

ORDER INFORMATION

Product NO.:KLS7-TS0304-1.8-160-T

Part Number

Shank Size

T-SMD Tactile Switch

Operating Force :160~260gf