

Tactile Switches





KLS7-TS3403 3x4mm (Two small turtles) Tact Switch

Electrical:



1. Rating: 50mA 12V DC
2. Contact Resistance: 100mΩ Max.
3. Insulation Resistance: 100MΩ Min, 100V DC
4. Dielectric voltage proof: 250V AC for 1min
5. Electrically Life: 30000 cycles Min.
6. Operating Force: 250±50gf
7. Environment temperature: -30°C~+70°C

Materials:

- A. Cards: Phosphor, Silver
- B. Pedestal: LCP, Black
- C. Shrapnel: Stainless steel
- D. Dust Film: 0.05
- E. Push button: LCP, Black
- F. Cover: Stainless steel 0.15

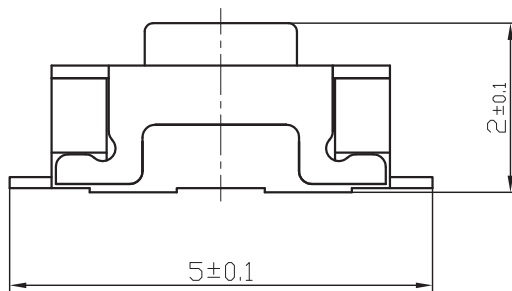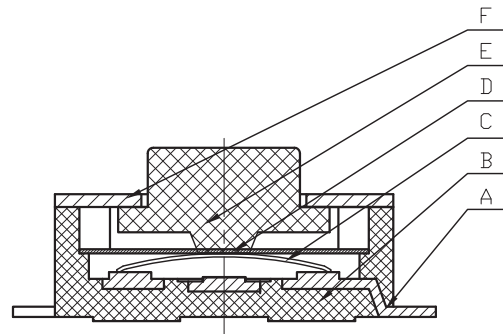

原理图
SCHEMATIC

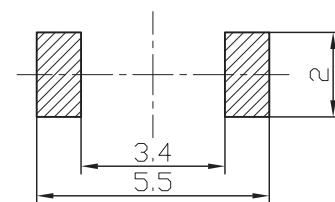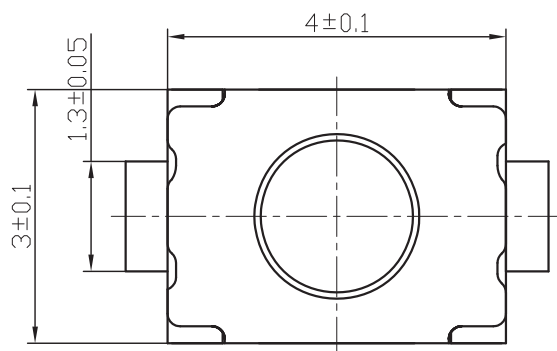

安装参考尺寸
P.C.B layout

ORDER INFORMATION

Product NO.: KLS7-TS3403-2.0-250-B

Part Number

3x4mm Tact Switc

Packing: B-Bulk

Operating Force: 250(±50gf)

Height: 2.0mm