



Tact Switch Series



KLS7-TS4502 4.5x4.5 Tact Switch Series

ELECTRICAL

- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C

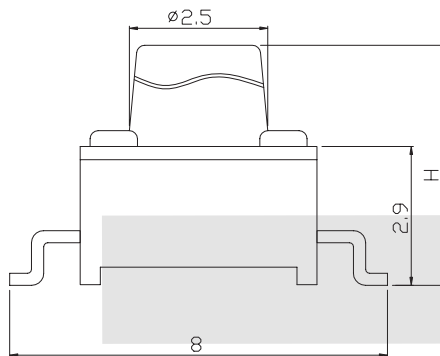

H
3.8
4.8
7.0
8.5

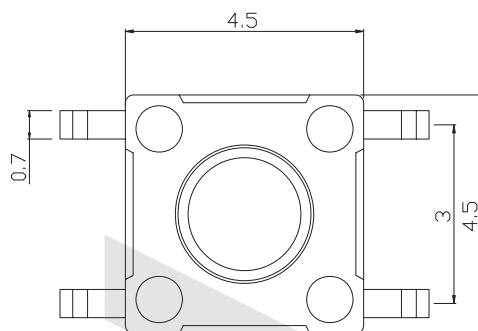

PCB LAYOUT

ORDER INFORMATION

KLS7-TS4502 - H1 - 180 -B

Series No. _____ Packing: B=Bulk T=Tape
Hight: 3.8mm / 4.8mm / 7.0mm / 8.5mm _____ Operating Force : 180~250gf