

Switch

Tact Switch Series



KLS7-TS6607 6x6mm Tact Switch Series

ELECTRICAL



- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C



VII

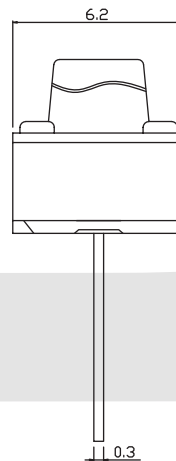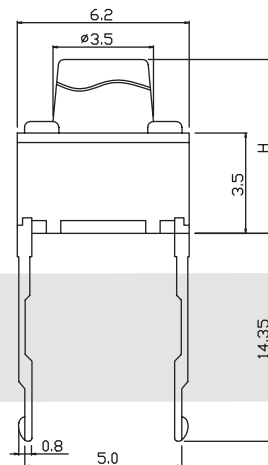

H
4.3
5.0
6.0
7.0
8.0



PCB LAYOUT

ORDER INFORMATION

KLS7-TS6607 - 4.3 - 180 - B

Series No.

Hight: 4.3mm/5.0mm/6.0mm/
7.0mm/8.0mm

Packing: B=Bulk T=Tape
Operating Force :180~250gf