

Tactile Switches



KLS7-TS6617 SMD Tactile Switches

Electrical Specification:

Contact Resistance: 5V 10mA
Insulation Resistance: DC100V / 1min
Dielectric voltage proof: 250V AC(50Hz / 60Hz) / 1min

Mechanical Specification:

Operating Force: 250 ± 50 gf
Full Travel: 0.3 ± 0.1 mm
Return Force: 50gf min
Stem Strength: 20N.min
Solderability:
(1) Solder temperature: $245 \pm 5^\circ\text{C}$
(2) Immersion time: $2\text{s} \pm 0.5\text{s}$

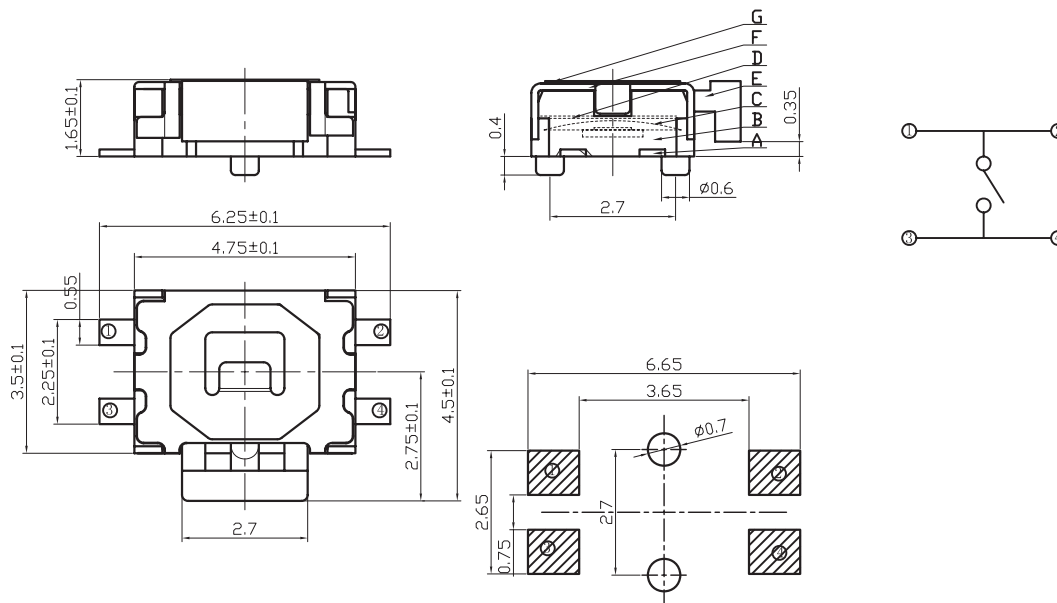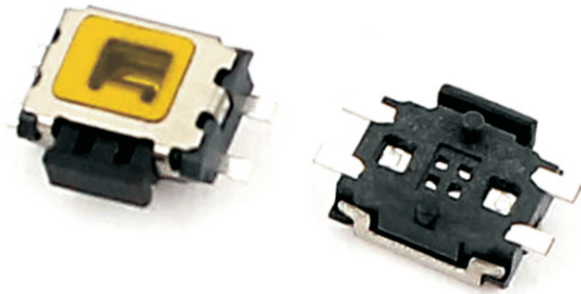

Serial number	Name	Material Science	Number	Remarks
G	Outer dust-proof	0.05	1	
F	Cover plate	Stainless steel 0.15	1	pickling
E	Button	PA46	1	
D	Dustproof film	0.05	1	
C	Reed	Stainless steel clad Silver	1	
B	Base	LCP Black	1	
A	Card	Copper 0.15	1	Plate with silver

ORDER INFORMATION

KLS7-TS6617-1.65-250-T

Part Number: KLS7-TS6617-1.65-250-T
SMD Tactile Switches
Height: 1.65mm
T: Tape Packing
Operating Force: 180 ± 50 gf
 250 ± 50 gf