


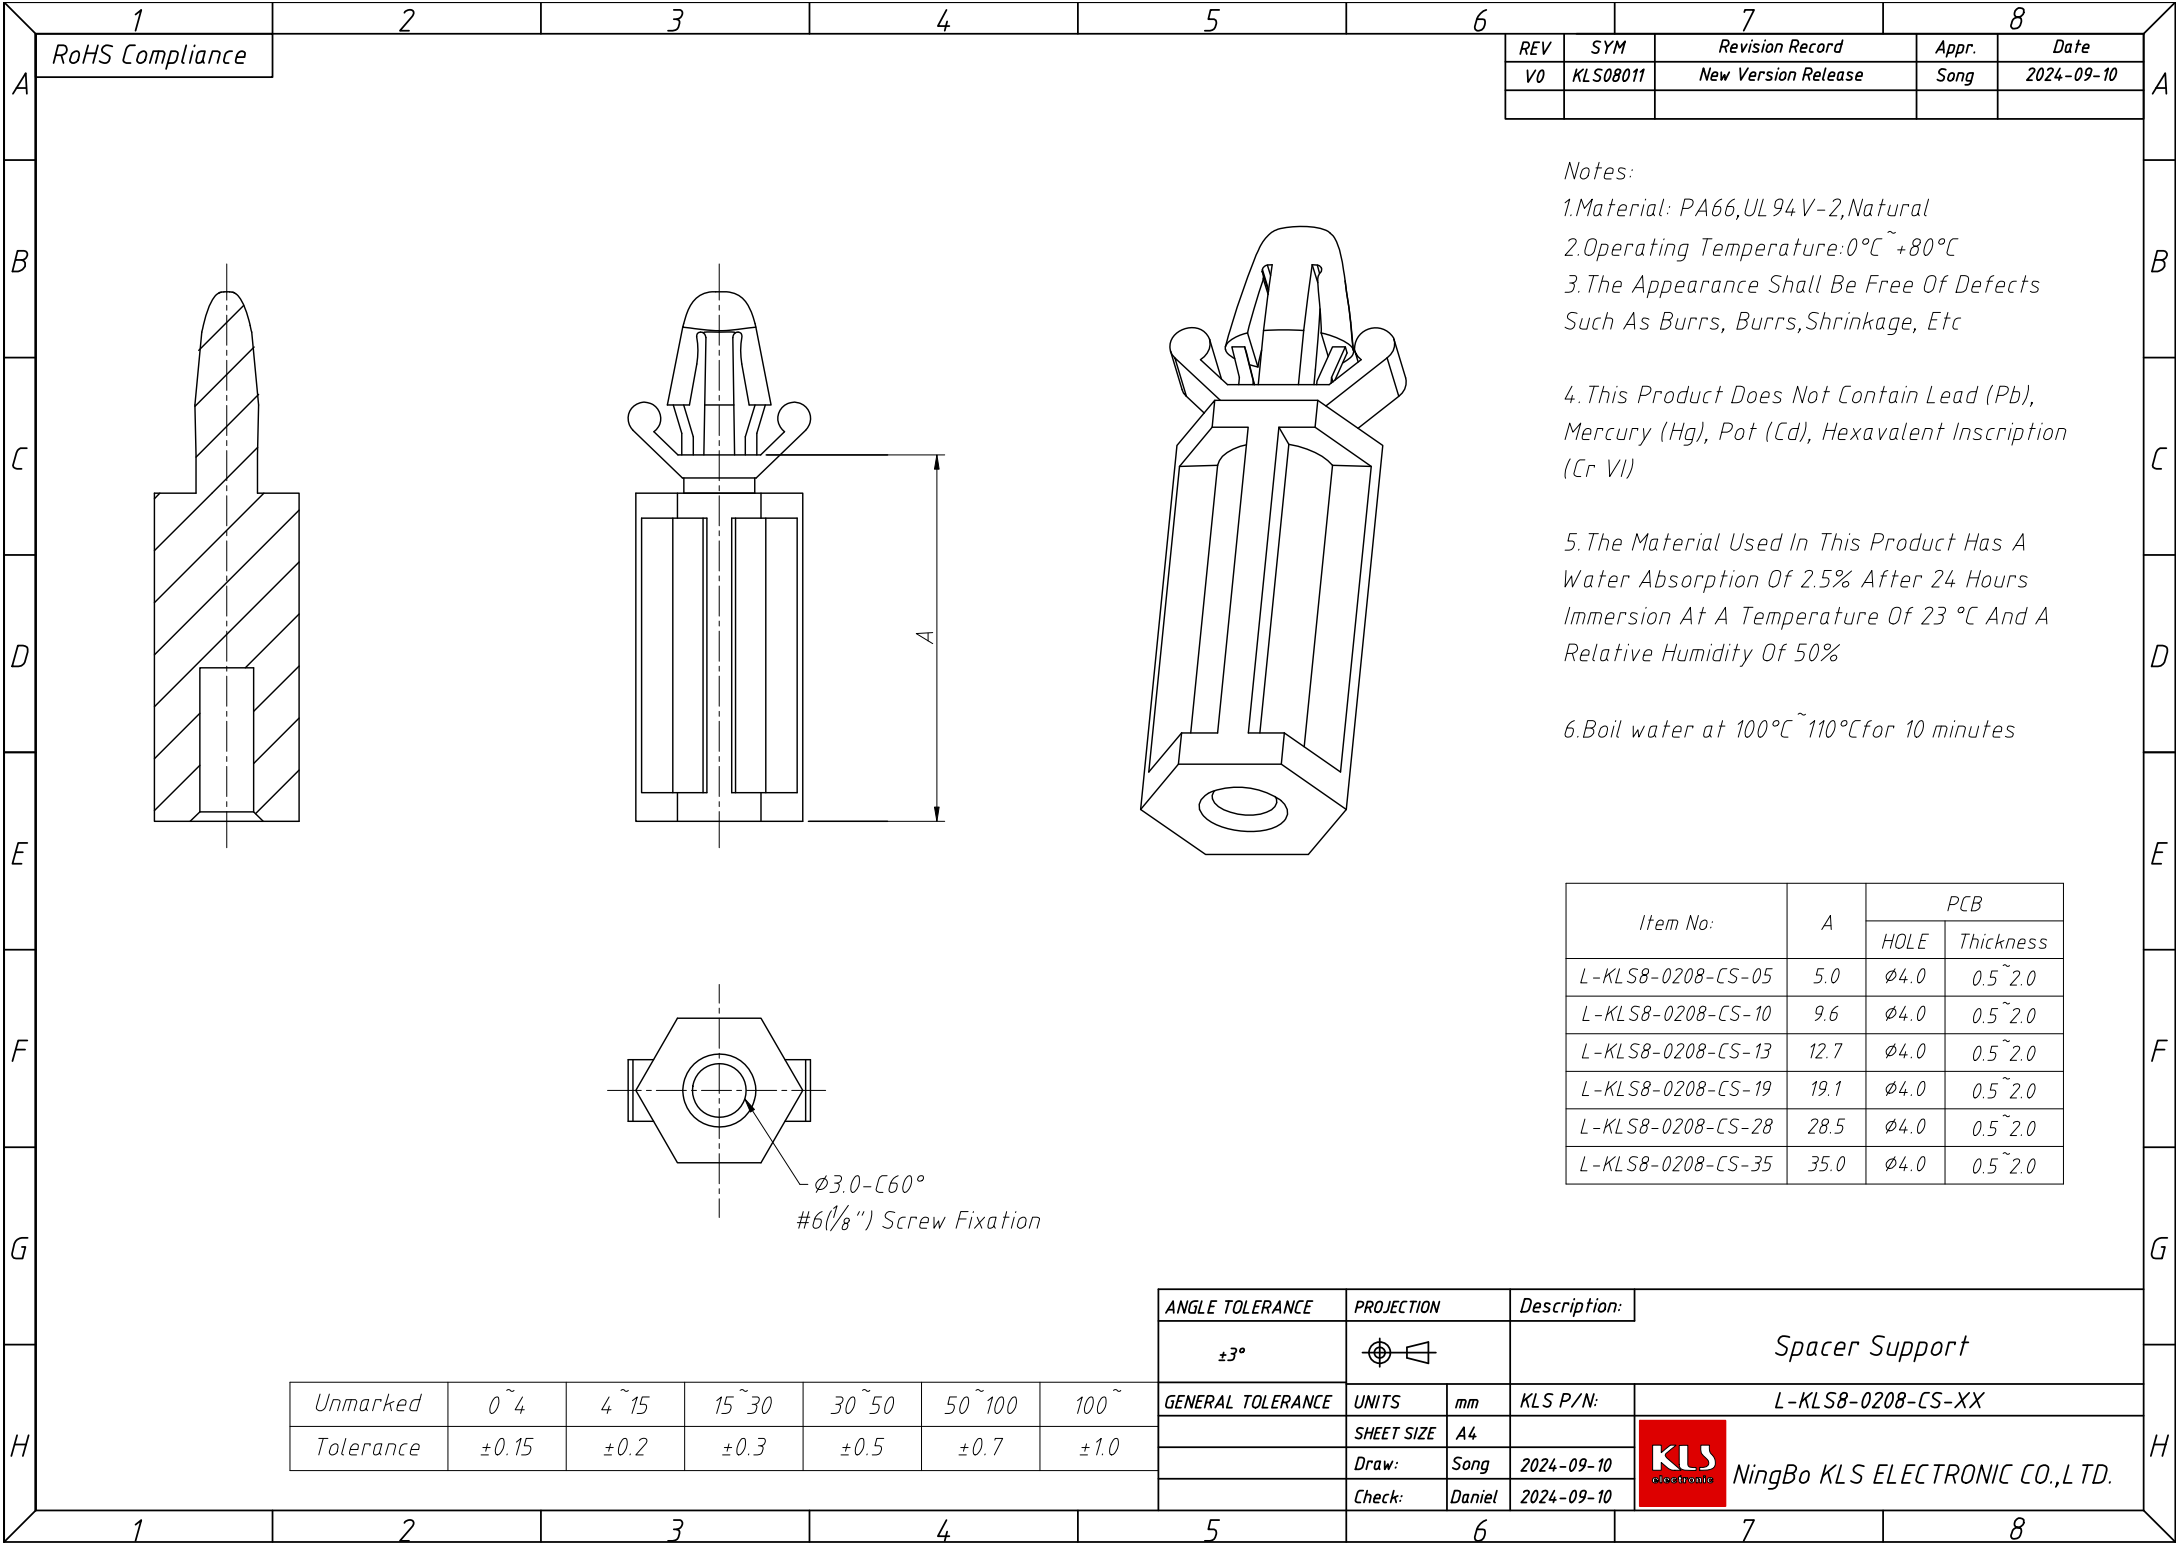

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS08011	New Version Release	Song	2024-09-10

Notes:

- 1.Material: PA66,UL 94 V-2,Natural
- 2.Operating Temperature:0℃~+80℃
- 3.The Appearance Shall Be Free Of Defects Such As Burrs, Burrs,Shrinkage, Etc
- 4.This Product Does Not Contain Lead (Pb), Mercury (Hg), Pot (Cd), Hexavalent Inscription (Cr VI)
- 5.The Material Used In This Product Has A Water Absorption Of 2.5% After 24 Hours Immersion At A Temperature Of 23 °C And A Relative Humidity Of 50%
- 6.Boil water at 100℃~110℃for 10 minutes

Item No:	A	PCB	
		HOLE	Thickness
L-KLS8-0208-CS-05	5.0	Ø4.0	0.5~2.0
L-KLS8-0208-CS-10	9.6	Ø4.0	0.5~2.0
L-KLS8-0208-CS-13	12.7	Ø4.0	0.5~2.0
L-KLS8-0208-CS-19	19.1	Ø4.0	0.5~2.0
L-KLS8-0208-CS-28	28.5	Ø4.0	0.5~2.0
L-KLS8-0208-CS-35	35.0	Ø4.0	0.5~2.0

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Spacer Support
GENERAL TOLERANCE	UNITS	mm
	SHEET SIZE	A4
	Draw:	Song
	Check:	Daniel

Unmarked	0~4	4~15	15~30	30~50	50~100	100~
Tolerance	±0.15	±0.2	±0.3	±0.5	±0.7	±1.0



NingBo KLS ELECTRONIC CO.,L TD.