




Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.


Male

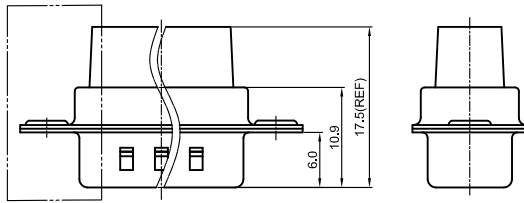



Male terminal

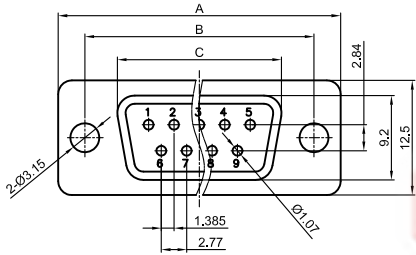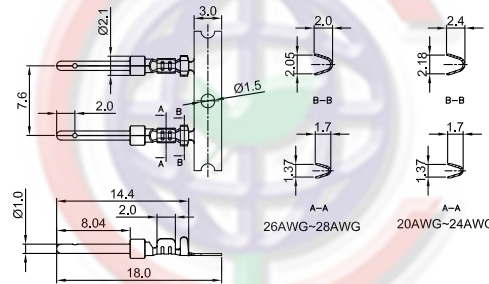

Female terminal

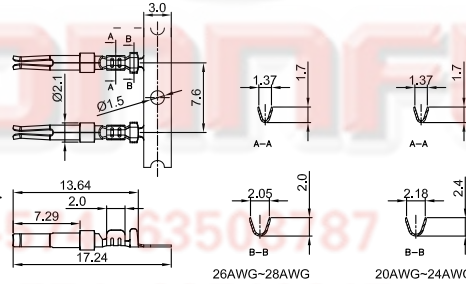

Female

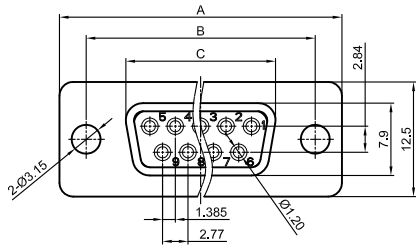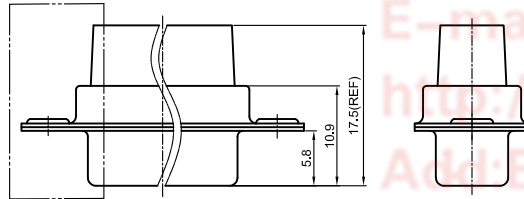

Position	A	B	C	
			Male	Female
9P	30.80	24.99	17.90	16.33
15P	39.14	33.32	26.50	24.66
25P	53.04	47.04	40.00	38.38
37P	69.32	63.50	56.50	54.84

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 07/07/07'		LJC 07/07/07'
B	DRAWING UPDATE	YCH 05/21/08'		LJC 05/21/08'
C	DRAWING UPDATE	JLZ 09/05/19'		

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE:1000MΩ Min.
 - MECHANICAL CHARACTERISTICS:
 - DURABILITY: 300 CYCLES.
 - ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE:-40°C~+105°C.
 - APPLICATION WIRE AWG:#20-28.
 - PRODUCT NUMBER CODE:

Body: DS1036-01 - XX X X X X X X

- Screw DIM. A
S: Standard(W/O nut)
1: 3.00 2: 4.00 3: 4.50 4: 5.00
5: 5.50 6: 5.80
- Screw type
S: Standard(W/O nut)
1: CC type 2: CS type
- SHELL PLATING
T:Fort & back shell tin
N:Fort shell nickel,back shell tin
- Housing color
U:Blue B:Black
- Connector type
M:Male F:Female
- No.of contacts
09:9pos 15:15pos
25:25pos 37:37pos

Terminal: T - DS1036-01 - X C X 0 0 - X

- Application wire awg
#24-20:20AWG~24AWG
N/A Code:26AWG~28AWG
- Plating type
0:Selective gold flash
6:Full tin
8:Full gold flash
- Terminal type
P:Male Terminal S:Female Terminal

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	D-SUB CRIMP TYPE	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1036-01 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1036-01-XXXXXX-C		

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD