


Rev.	Changed by	Date	ECN No.
A1	JANUARY	2011-01-15	

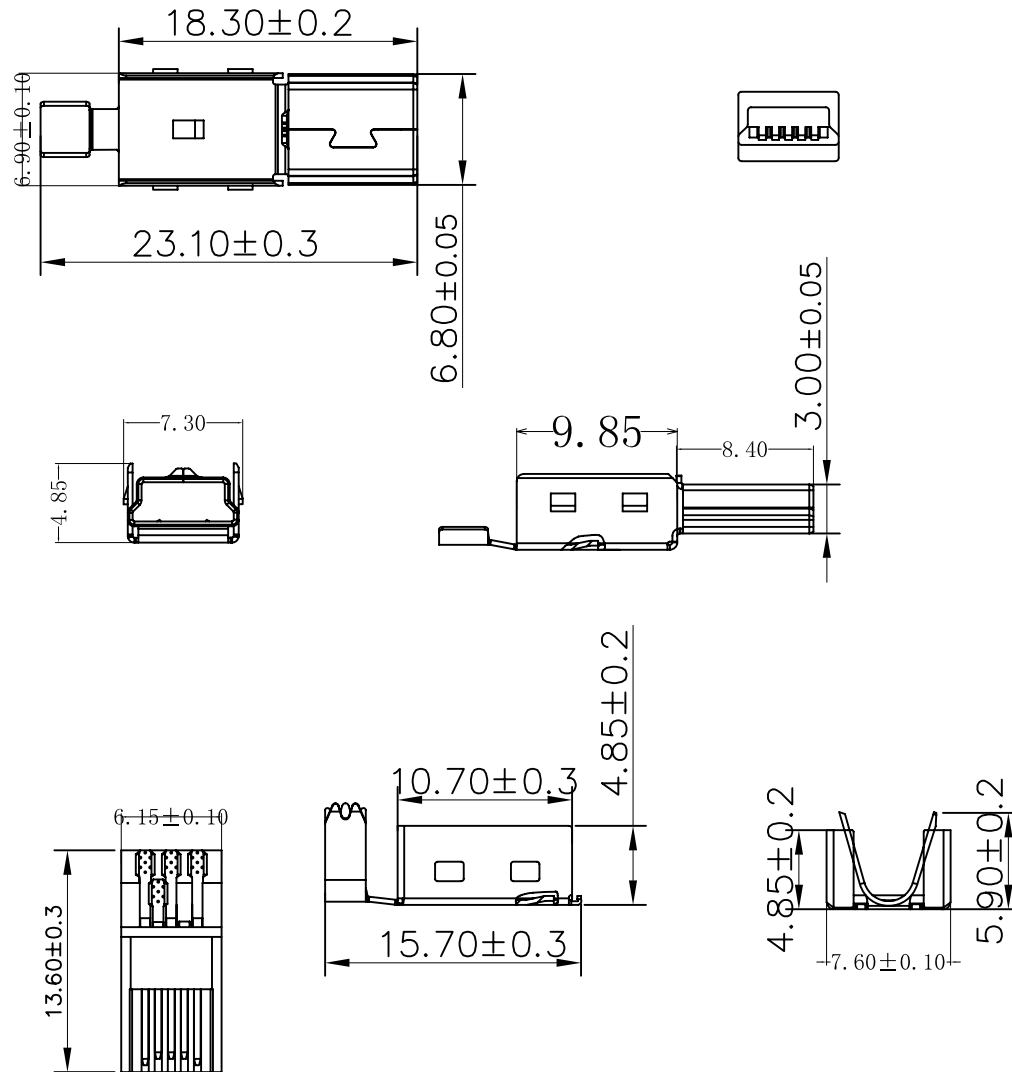

mini-USB-5PIN SOLDER TAIL
焊线式

特性: Specifications

电器 Electrical:

接触阻抗: Contact Resistance
30milliohms MAX

耐电压: Dielectric Withstanding Voltage
50V AC AT sea LevoL

绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

材料: Matorial:

塑胶: Housing:Hing Temperature Thermoplastics,
UL 94V-0耐高温塑胶

端子: Contact:Copper Alloy 铜合金

铁壳: Shell:SPCC-SD 铁

电镀: Finish:

端子: Contact: Plated Gold in Mating Area;
Tin/Lead On Solder Talls

接触点镀金, 脚镀锡铅

铁壳: Shell:

Tin/Lead Piating 镀镍

NO.	Part Name	Material	Quantity	Remark
1	Shell	SPCC or Best 2013mm	1	See Order Information
2	Housing	Thermoplastic LCP	1	See Order Information
3	Contact	Thermoplastic BRASS	1	Gold Plated on Contact And Tin on Tail

PARIS LIST

KLS ELECTRONIC CO., LTD.				单位 (Unit) :MM
				比例 (Scale) 1:1
品名 (Commodity) : MINI USB5P公(普通型前五后四)三件套				ANGLE OF PROTECTION 未注 公差 Tolerance Unspecified
审核 (CHECKED):		版本 (REV):	A/O	X.X ± 0.30
设计 (DESIGN):	康兰英	日期 (DATE):	2011/1/5	X.XX ± 0.20
				X.XXX ± 0.10
				X° ±5°
				XX° ±2°