




AMASS

(Item No): XT60U-F

(Drawing)

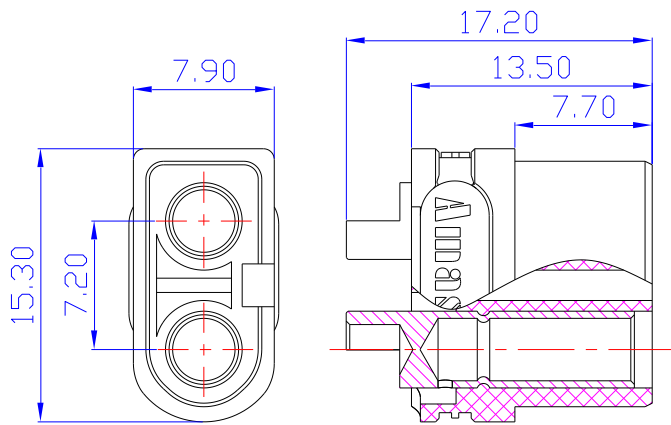

■ (Material & Parameter)

|                  |                                                                                     |             |              |
|------------------|-------------------------------------------------------------------------------------|-------------|--------------|
| Item No.         | XT60U-F                                                                             | CR          | 0. 45mΩ      |
| COLOR            |  |             | DC 500V      |
| Metal Material   | Brass Gold Plated                                                                   | RC          | 30A          |
| Plastic Material | PA                                                                                  | MC          | 60A          |
| FR LEVEL         | UL94 V0                                                                             | USE TIMES   | 1000 TIMES   |
| Recommend USE    | BATTERY                                                                             | Cable SPEC. | 12AWG        |
| CERTIFICATION    | CE/UL                                                                               | TEMPERATURE | -20℃ to 120℃ |

★ (Data sheet will change according with the test background)