

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
				LJC 07/04/05

NOTES:




1. SPECIFICATIONS

- Contact Resistance: 30mΩ max.
- Insulator Resistance: 1000MΩ min.at DC 500V
- Current Rating: 2Amps
- Dielectric withstanding voltage: AC 500V For 1 minute
- Operating Temperature: -20°C to +70°C
- Contact: Copper alloy
- Housing: PBT




2. Product Unmber code:

DS1118 - X X X X X X

- Column with Contacts type
 - 1: 1-3 type
 - 2: 2-4 type
 - 3: 1-2-3 type
- Rows with Contacts type
 - 1: a type(1 row with contact)
 - 2: ab type(2 rows with contact)
- Mounting type
 - R: right angle type
 - V: V/T type
- Contact plating
 - 6: full Tin plating
 - 0: selective gold flash
- Connector type
 - M:male F:female
- No.of contacts
 - 64 32
- Series No.
 - DS1118

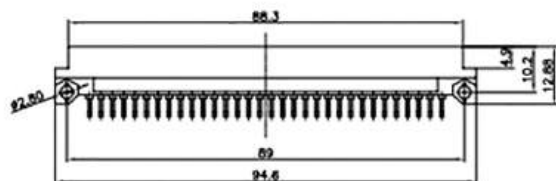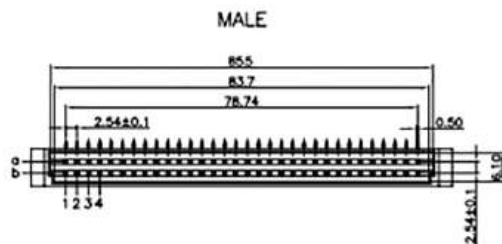

FEMALE

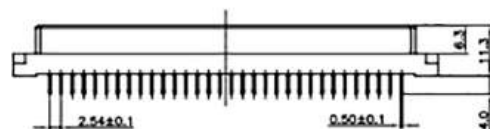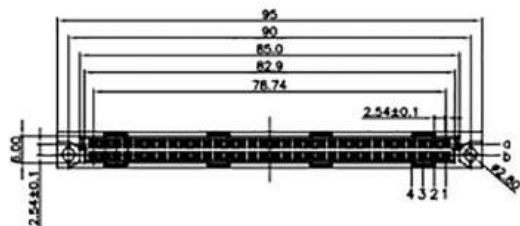

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5'	mm	DIN 41612 B TYPE(2ROWS)
.X	±0.38	.X	±3'		
.XX	±0.25	.XX	±2'		
DRAWING TYPE		CUSTOMER		SHEET SIZE	A4
SCALE		1:1	SHEET	1 OF 1	
DRAWING NO.		C-DS1118-XXXXXXX			
UNITS		mm			
SHEET SIZE		A4			
SERIES		DS1118 SERIES			
DIN41612 2*16 32 розетка		DIN41612 2*16 32 угл.вилка			
DIN41612 2*32 32 розетка		DIN41612 2*32 32 угл.вилка			
DIN41612 2*32 64 розетка		DIN41612 2*32 64 угл.вилка			