


CUSTOMER: NUMBER: 070404-001


VARIETY PPART NO: TMB-12A05

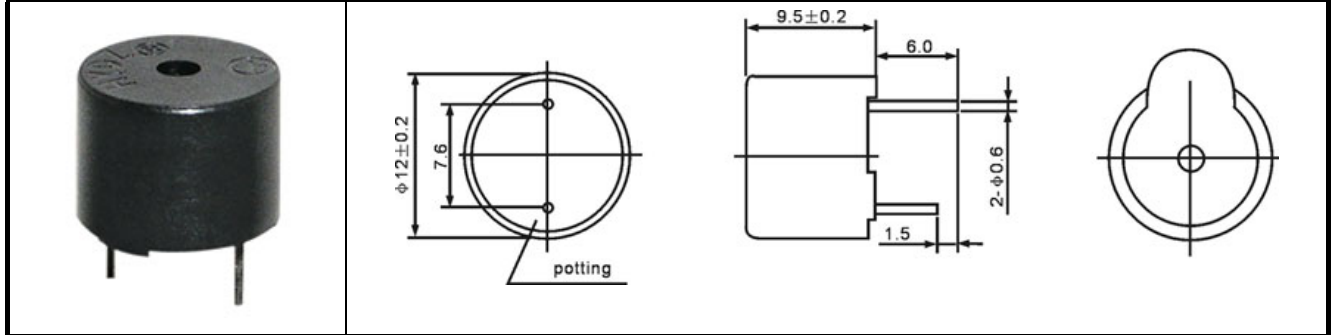

ELECTICAL REQUIREMENTS

| | |
|---------------------------|-------------|
| Rated Voltage | 5V |
| Operating Voltage | 3~7V |
| Max. Rated Current | 30mA |
| The minimum voice presses | 85dB |
| The flaps the even rate | 2300±300 Hz |
| Operating Temperature | -20 ~ +115c |
| Weight | 2g |

FREQUENCY RESPONSE

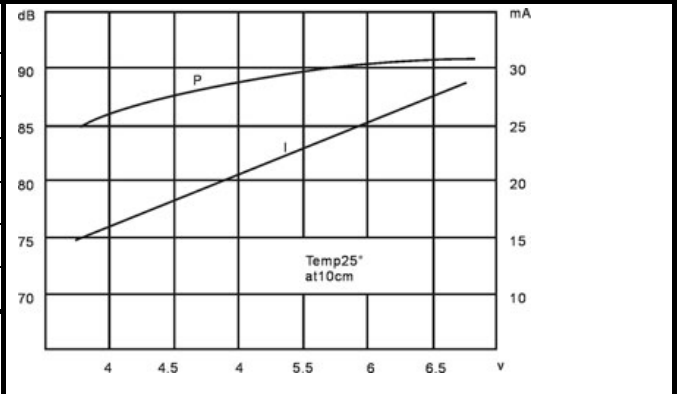

TEST INSTRUMENT

| | |
|--|----------|
| | DASG3186 |
| | 2B-14 |
| | CAL-7749 |
| | JH6160 |

OTHERS

| | |
|--|--|
| | |
|--|--|

Materials

| | | | |
|---------------|-----|---------------|----|
| OUTSIDE SHELL | ppo | CIRCUIT | |
| WIRE | | CORE | |
| SLICE | | COATING EPOXY | AB |

| | | | | |
|----|---------------------|----------|------------|----------|
| NO | Revision\Date\Check | Approved | Checked By | Drawh By |
| 1 | | | | |
| 2 | | Remark | | |
| 3 | | | | |