
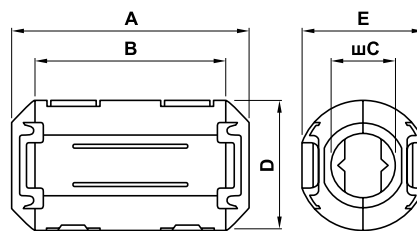


INTERNAL CONSTRUCTION

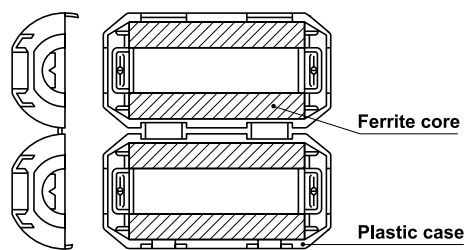

Part No.	Dimensions in mm						Applicable cable outer dia.	Weight(g)	Impedance freq. characteristics Fig.
	A	B	$\varnothing C$	$\varnothing D$	E				
ZCAT1518-0730	22±1	18±1	7±1	15±1	–	7max.	6	1	
ZCAT2032-0930	36±1	32±1	9±1	19.5±1	–	9max.	22	3	
ZCAT2132-1130	36±1	32±1	11±1	20.5±1	–	11max.	22	4	
ZCAT3035-1330	39±1	34±1	13±1	30±1	–	13max.	63	5	
ZCAT1730-0730A	30±1	23±1	7±1	16.5±1	15±1	4 to 7(USB/IEEE1394)	12	6	
ZCAT2035-0930A	35±1	28±1	9±1	19.5±1	17.4±1	6 to 9	22	3	
ZCAT2436-1330A	36±1	29±1	13±1	23.5±1	22±1	10 to 13	29	8	